
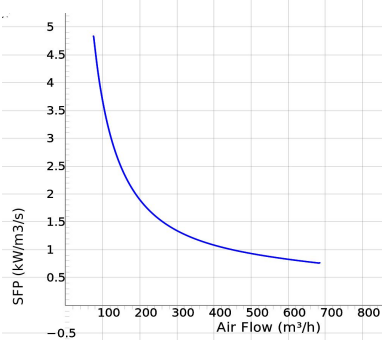
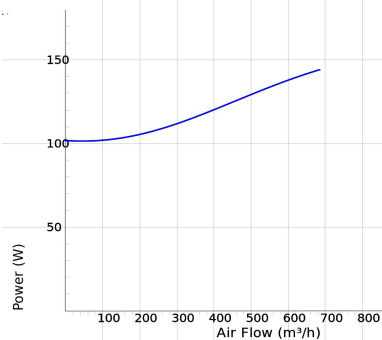


DFE 133-20 ErP

- Double inlet radial fan.
- High pressure, large air volumes and low sound levels.
- Impeller with forward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- The motor is situated in the airstream to get ultimate cooling.
- Integrated motor protection.
- Can be ordered with junction box.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- Compact design for a minimum amount of space.
- Ideal for use in heat exchangers, dehumidifiers and air cleaners.

Accessories

- VRDE 1,5
- VRS 1.0
- VRTE C

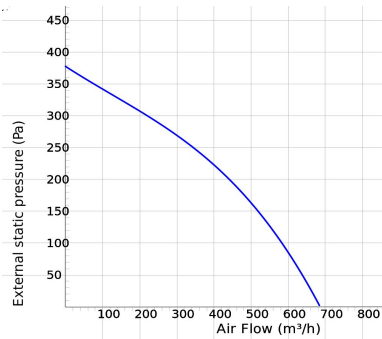

TECHNICAL DATA


3091876
DFE 133-20 ErP

Voltage	230 V
Phase	1 ~
Frequency	50 Hz
Power	147 W
Current	0.64 A
Speed	1144 r.p.m.
Max. temperature of transported air	55 °C
Max. temperature of transported air when speed controlled	55 °C
Sound pressure level at 3 m	59 dB(A)
Weight	3.7 kg
Enclosure class	44 IP
Capacitor	4 µF
Max. flow	684.00191520536 m³/h
Max. pressure	375 Pa
Voltage range	220-240 V

SOUND DATA

	Flow (m³/h)	L _{WA} tot dB (A)	63Hz	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
0. Surrounding Lw dB(A) 230V	454	67	43	49	54	59	62	61	57	50
0. Outlet Lw dB(A) 230V	454	74	55	59	54	58	71	67	64	57

DIMENSIONS

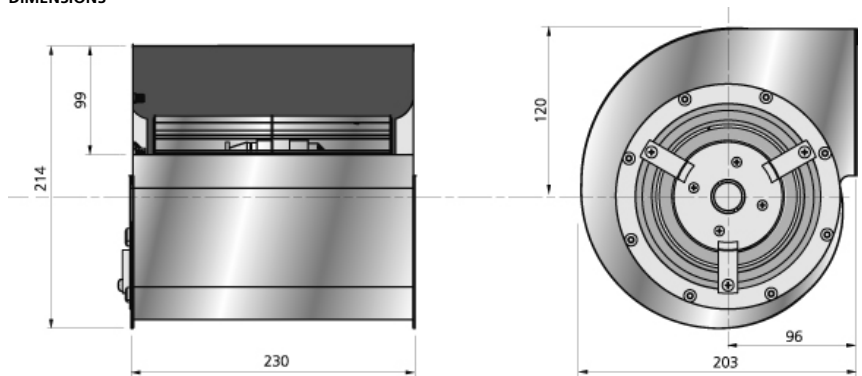

Voltage steps

1
230V



DISTRIBUTEUR EN TUNISIE

Rue de la Fonte, zone industrielle 2013 BEN AROUS
 Téléphone : 71 38 85 34 – Fax : 71 38 42 30
 E-mail : atv@atv.tn
 Site web : www.atv.tn