

Self driven
Centrifugal Fans VDH

NICOTRA | **Gebhardt**
fan|tastic solutions



Nicotra Gebhardt S.p.A. (Italy) certifies that ADH-E fans of the E0, E2, E4, E6 and E7 versions, from sizes 0160 to 0560, RDH-E fans of the E0, E2, E4, E6 and E7 versions, from sizes 0180 to 0560, ADH and RDH fans of the L, R, K, K1 and K2 versions, from sizes 0630 to 1000, AT fans of the S, SC, C and TIC versions, from sizes 7/7 to 30/28, shown herein are licensed to bear the AMCA Seal.

Nicotra Gebhardt GmbH (Germany) certifies that RZR fans of the 11, 12, 15 versions, from sizes 0355 to 1000, shown herein are licensed to bear the AMCA Seal.

The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.

Air performance with Installation Type “A” (“with free outlet”), and that of the twin fan versions G2L, G2R, G2K, G2K2, G2E0, G2E2, G2E4, G2E7, SC2, G2C and G2C-C2, and that of the triple fan versions G3C and G3C-C2 in any installation type is not AMCA licensed.


Nicotra Gebhardt stands for:



▶ Maximised flexibility and minimised design effort for customers, because all radial fan casings have identical dimensions – no matter what kind of impeller geometry



▶ Top product quality and shorter delivery times – thanks to state-of-the-art production technology

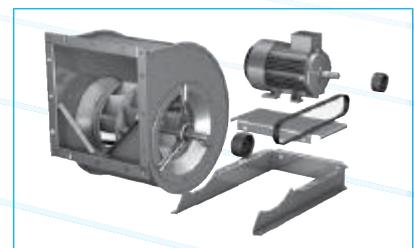

▶ Energy efficiency through comprehensive system know-how

The Nicotra Gebhardt portfolio

A strong provider for many optimal solutions

When it comes to radial fans, we are the first people you should talk to. From belt-driven radial fans to plugfans, it's all there in our product portfolio. We offer the largest, most comprehensive range of products in this area – and of course the matching services.

ADH-E / ADH



double-inlet
forward-curved
impeller geometry

AT



double-inlet
inch diameters
forward-curved impeller
geometry

RDH-E / RDH



double-inlet
backward-curved
impeller geometry

RZR



double-inlet
hollow aerofoil
impeller geometry

When everything fits

To us, perfection in our product portfolio means that all product series in the area of encased radial fans are attuned to one another and are 100% compatible in their dimensions.

How did we do it?


By using an identical design for the connection dimensions of every fan size in our newly developed series ADH-E and RDH-E and carefully coordinating our options and accessories.

In this way, we have standardised and harmonised our product portfolio in all relevant areas.

Well designed, easy to install, economical

A system that saves space, time, and money – in an air handling unit or any other application: our compact base frame offers decisive advantages:

- ▶ The frame lengths have been optimised and adjusted for the casing position and motor installation height to achieve the smallest possible overall height and length
- ▶ Exact, optimised coordination of all components, all the way through to installation, adjustment and testing
- ▶ Suitable for all fans of the series ADH-E0, RDH-E0 and RZR-11 up to size 0500

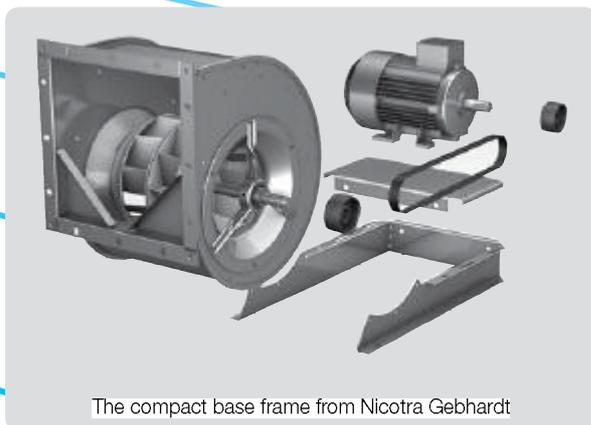

The compact base frame from Nicotra Gebhardt

proSELECTA II

proSELECTA II is a technical selection program that allows you to configure your own individually designed fan. It provides you with the opportunity to choose from the entire range of fan types and their associated options.



Simple and reliable selection

The result from **proSELECTA II** is the provision of all the technical data for your fan, including sound level data, dimension specifications and accessories. Apart from that, as a registered user, your purchase prices are provided. Additionally fully dimensioned drawings in DXF format are available, which can be downloaded and transferred straight into your CAD system.

So that you can be sure

Models and options that are technically not permissible, are automatically excluded in proSELECTA II. So there is no chance that you will configure a "wrong" device option.



What else is important to you

During the fan selection process, you can choose any of the standardised ATEX options.

Free registration and many advantages


You can register as a proSELECTA II user with us, which enables us to offer you faster order processing. What this means for you is:

- ▶ The complete configuration of your fan with its associated system accessories and belt drive layout.
- ▶ The possibility to produce fans that operate via a frequency inverter.
- ▶ The option of saving your own fan configuration on our server.
- ▶ The opportunity to modify your saved configuration, even over the phone to your Nicotra Gebhardt representative.

High performance centrifugal fan ADH

double inlet for belt drive
impeller with forward curved blades of galvanised sheet steel

- ▶ Volume up to 300,000 m³/h
- ▶ Pressure up to 2,200 Pa




ADH

High performance centrifugal fan AT

double inlet for belt drive
impeller with forward curved blades of galvanised sheet steel

- ▶ Volume up to 65,000 m³/h
- ▶ Pressure up to 2,500 Pa




AT

High performance centrifugal fan RDH

double inlet for belt drive
centrifugal impeller with backward inclined blades

- ▶ Volume up to 290,000 m³/h
- ▶ Pressure up to 3,500 Pa




RDH

High performance centrifugal fan RZR

double inlet for belt drive
high performance impeller with backward curved hollow section true aerofoil blades


- ▶ Volume up to 300,000 m³/h
- ▶ Pressure up to 3,500 Pa



RZR

Fittings / Accessories

- ▶ complete system accessories
- ▶ miscellaneous fittings

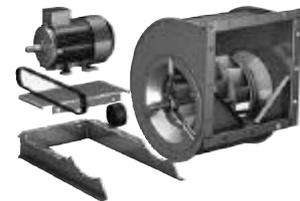

Accessories


Description

- ▶ technical description
- ▶ operating limits



Description

Working towards perfection

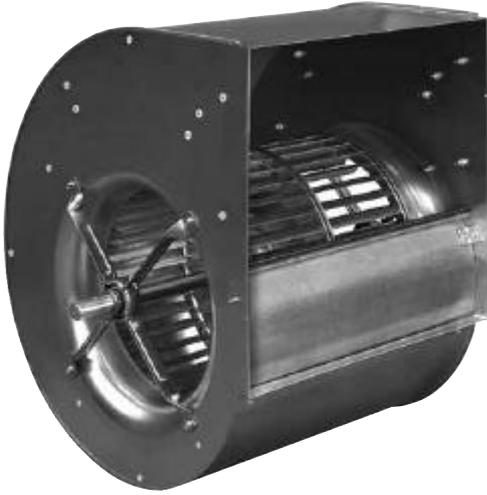

The ADH E and ADH series

By further developing sizes 0160 to 0560 of our successful ADH model range, we have created a product series which boasts a whole host of improvements. The result is the ADH E generation, one which will overcome the challenges of any application.

During development, we paid particularly close attention to four factors: air volume flow, pressure, energy efficiency and noise. These aspects are the key to success: all of the models are on a par with or superior to their predecessors in terms of these parameters.

New choice of models

Whether you are looking for single or twin fans, the new ADH E series offers impressive further improvements in terms of functionality and potential uses, whatever the application.

The ultimate in compatibility

Minimised design effort for you means that:

- ▶ All accessories and equipment are carefully coordinated and compatible to further product ranges like RDH E / RDH (backward curved centrifugal fans) and RZR (hollow-airfoil blade geometry).
- ▶ The connection dimensions for ADH E (sizes 0160 to 0560) are identical with the corresponding models from the ADH range.
- ▶ The models for sizes ADH 0630 to 1000 remain unchanged.
- ▶ All ADH E models up to size 0500 are compatible with the new compact base frame – a unique feature which makes completing your system ultra simple and affordable!

Top quality for performance and a long service life!

Alongside an intelligent construction, aspects such as the quality of materials and workmanship play a crucial role in ensuring a long life cycle. That's why we have made the casing of the new ADH E even sturdier by means of a standing seam construction. In addition to this, the way in which the blades are attached to the impeller has been optimised and the shafts have been galvanised for more effective corrosion protection – further factors which significantly increase the service life of this range.

The product range at a glance

The technical specifications of the ADH E and ADH series

The standard series are designed for permanent ventilation at up to +80 °C resp. +100 °C. The specifications conform to accuracy class 2 according to DIN 24166.

ADH E and ADH G2E series

- ▶ Sizes 0160 up to 0560
- ▶ Scroll of galvanized sheet steel with standing seam and straight cut off
- ▶ New cylindrical impeller with forward-curved blade geometry
- ▶ Galvanized shaft
- ▶ Volume up to 120.000 m³/h
- ▶ Pressure up to 2.200 Pa

ADH and ADH G2 Series

- ▶ Sizes 0630 up to 1000
- ▶ Lap jointed scroll of galvanized sheet steel with Pittsburgh-Seam and V-cut off
- ▶ Volume up to 300.000 m³/h
- ▶ Pressure up to 1.800 Pa

The ADH E and ADH range of models:

The right fan for every specification!

Depending on the fan size, the ADH E and ADH series have up to 5 mechanical versions of the single fan and up to 4 additional twin fan options. In this way, we ensure that we have the perfect model for all requirements and any application.

Version	Description	Figure
ADH E0 / ADH L	Lap jointed scroll without feet and discharge flange. Light duty bearing execution with pressed steel housing/strut assemblies.	
ADH E2 / ADH R	Lap jointed scroll with rectangular side frame, without discharge flange. Light duty bearing execution with pressed steel housing/strut assemblies.	
ADH E4 / ADH K	Lap jointed scroll with heavy duty reinforced side frames, without discharge flange. Medium duty bearing execution with cast iron pillow block, mounted on a robust pedestal.	
ADH E6 / ADH K1	Lap jointed scroll with heavy duty reinforced side frames, without discharge flange. Medium-heavy duty bearing execution with cast iron pillow block, mounted on a robust pedestal.	
ADH E7 / ADH K2	Lap jointed scroll with heavy duty reinforced side frames, without discharge flange. Heavy duty bearing execution with single-piece resp. split-type plummer block, mounted on a robust pedestal.	

Version	Description	Figure
ADH G2E0	The two single fans ADH E0 or ADH L are fitted together to a robust assembly by means of 3 U-channels. Both impellers are fitted on a common shaft supported by 3 bearings.	
ADH G2E2 / ADH G2R	The two single fans ADH E2 or ADH R are fitted together to a robust assembly by means of 3 angle bars. Both impellers are fitted on a common shaft supported by 3 bearings.	
ADH G2E4 / ADH G2K	The two single fans ADH E4 or ADH K are fitted together to a robust assembly by means of 3 angle bars. Both impellers are fitted on a common shaft supported by 3 bearings (sizes 0250/-0630) or the fans have separated shafts being connected by a elastic coupling (sizes 0710/-1000).	
ADH G2E7 / ADH G2K2	The two single fans ADH E7 or ADH K2 are fitted together to a robust assembly by means of 3 angle bars. Both impellers are fitted on a common shaft supported by 3 bearings (sizes 0250/-0630) or the fans have separated shafts being connected by a elastic coupling (sizes 0710/-1000).	

ADH E_-0160

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	160 mm
Number of blades	z	36
Moment of Inertia	J	0.006 kgm ²


Impeller Data

Impeller weight	m	1.1 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

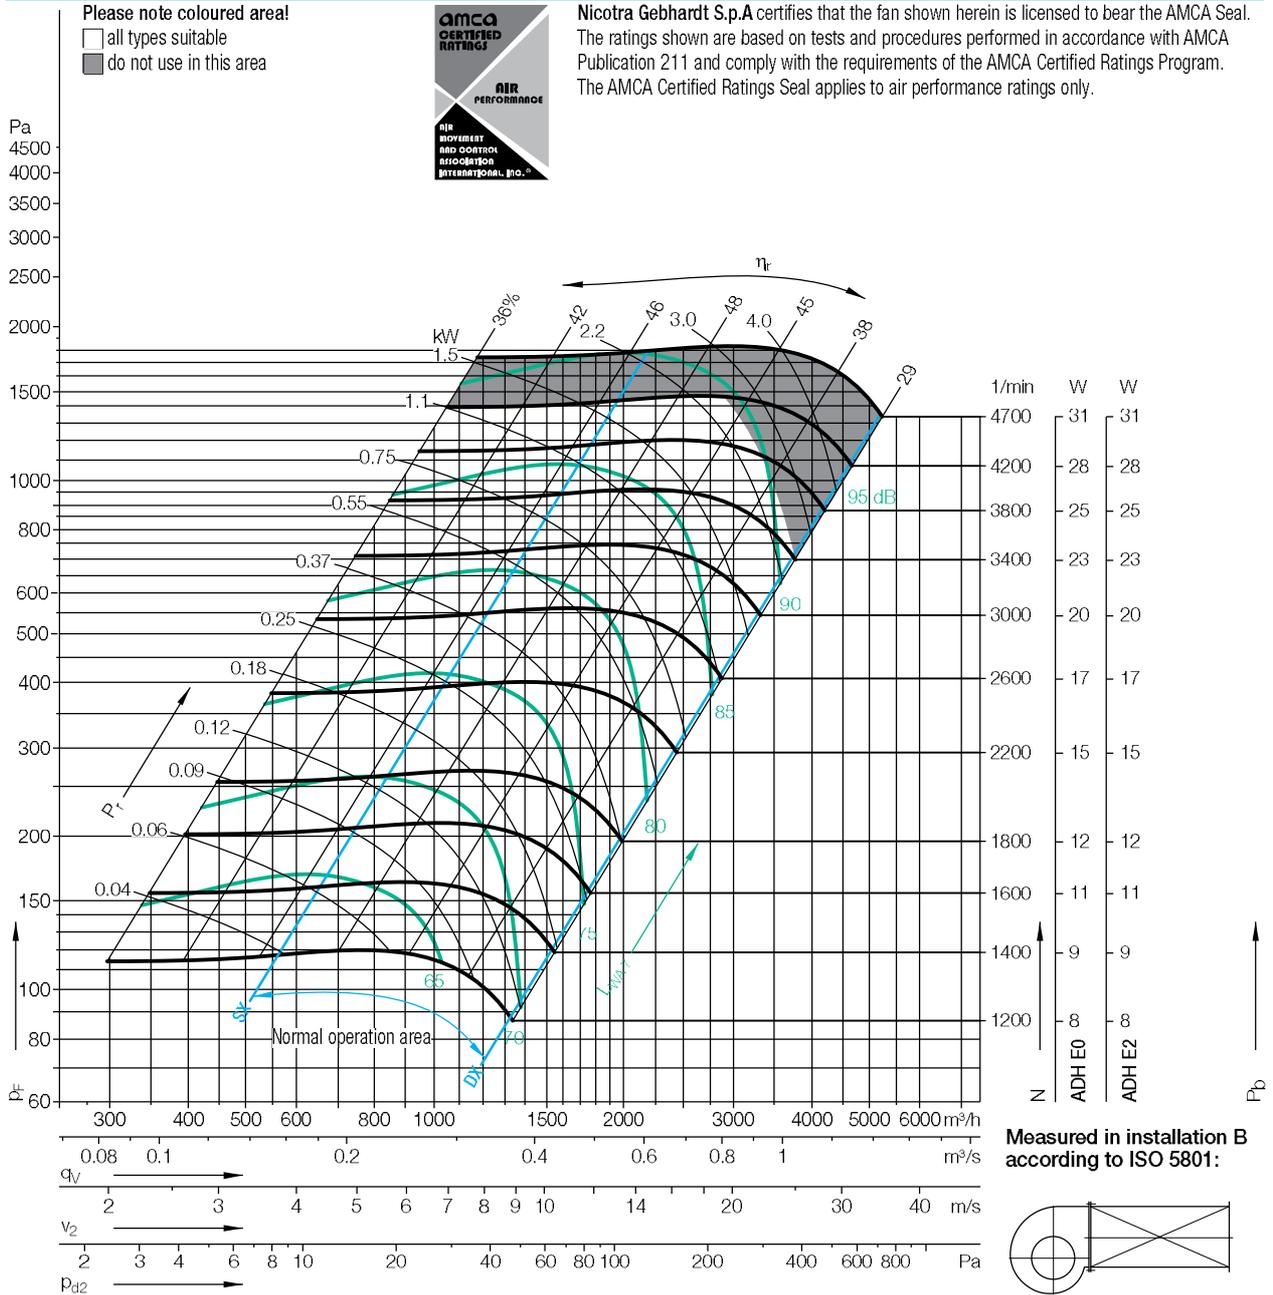

Measured in installation B according to ISO 5801:



$\Delta L_{Wrel4}(A)$

Relative sound power level for inlet side L_{Wrel4} at octave centre frequencies f_c

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

Duty point	Speed 1/min	dB
SX	3500	2
SX	2200	1
SX	1400	-1
$Q_{V,opt}$	3500	2
$Q_{V,opt}$	2200	0
$Q_{V,opt}$	1400	-1
DX	3500	2
DX	2200	1
DX	1400	0


	63	125	250	500	1000	2000	4000	8000	Hz
	0	-9	-3	-5	-7	-7	-8	-11	dB
	-5	-4	-3	-11	-4	-6	-9	-14	dB
	-5	-1	-5	-4	-5	-6	-11	-17	dB
	-4	-10	-4	-5	-7	-6	-7	-12	dB
	-8	-5	-3	-11	-5	-6	-8	-13	dB
	-7	-2	-6	-5	-5	-6	-11	-16	dB
	-10	-15	-6	-7	-10	-6	-7	-9	dB
	-14	-8	-6	-13	-7	-6	-6	-9	dB
	-11	-5	-8	-8	-6	-6	-7	-11	dB

	63	125	250	500	1000	2000	4000	8000	Hz
	9	8	6	-3	-5	-8	-10	-13	dB
	9	8	1	-4	-6	-9	-11	-16	dB
	10	5	-1	-4	-7	-9	-13	-19	dB
	8	6	4	-3	-5	-8	-10	-12	dB
	7	6	-0	-4	-6	-9	-10	-15	dB
	7	4	-2	-4	-7	-9	-12	-18	dB
	-2	2	4	-4	-6	-6	-8	-8	dB
	0	5	-3	-5	-5	-8	-8	-11	dB
	5	1	-4	-6	-6	-8	-9	-13	dB


ADH E_-0160

Dimensions in mm, subject to change.

ADH E0-0160 5 kg

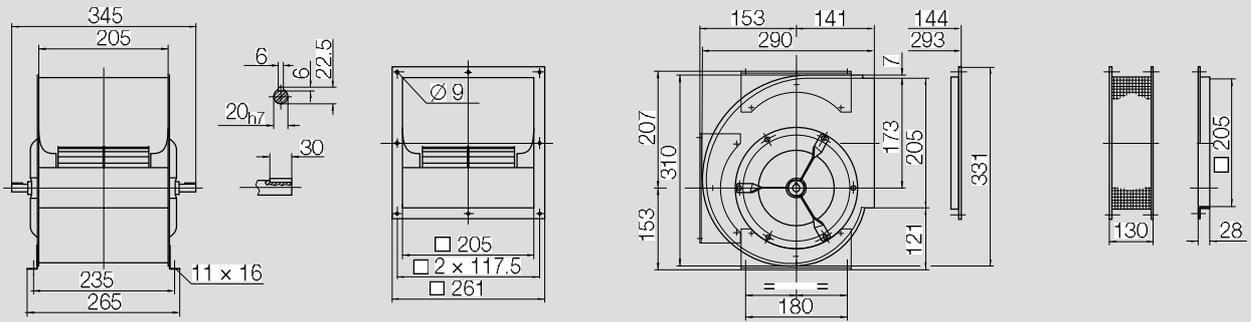

ADH E2-0160 6.6 kg

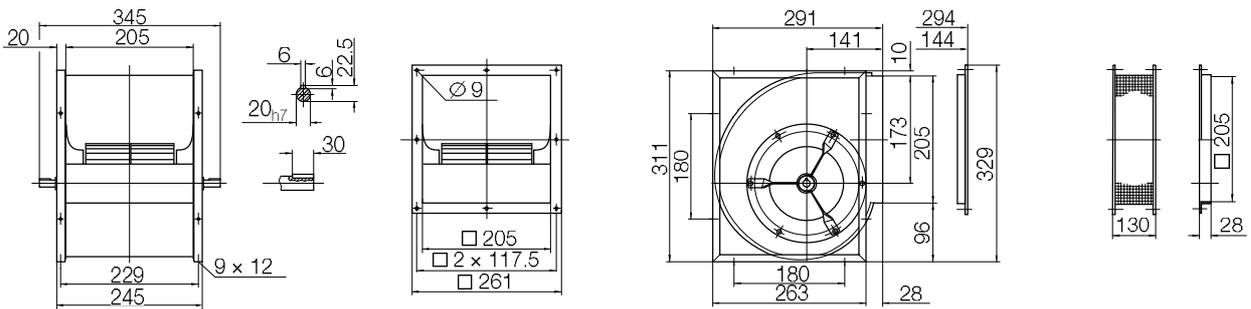

ADH E_-0180

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	180 mm
Number of blades	z	40
Moment of Inertia	J	0.010 kgm ²

Impeller Data

Impeller weight	m	1.5 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

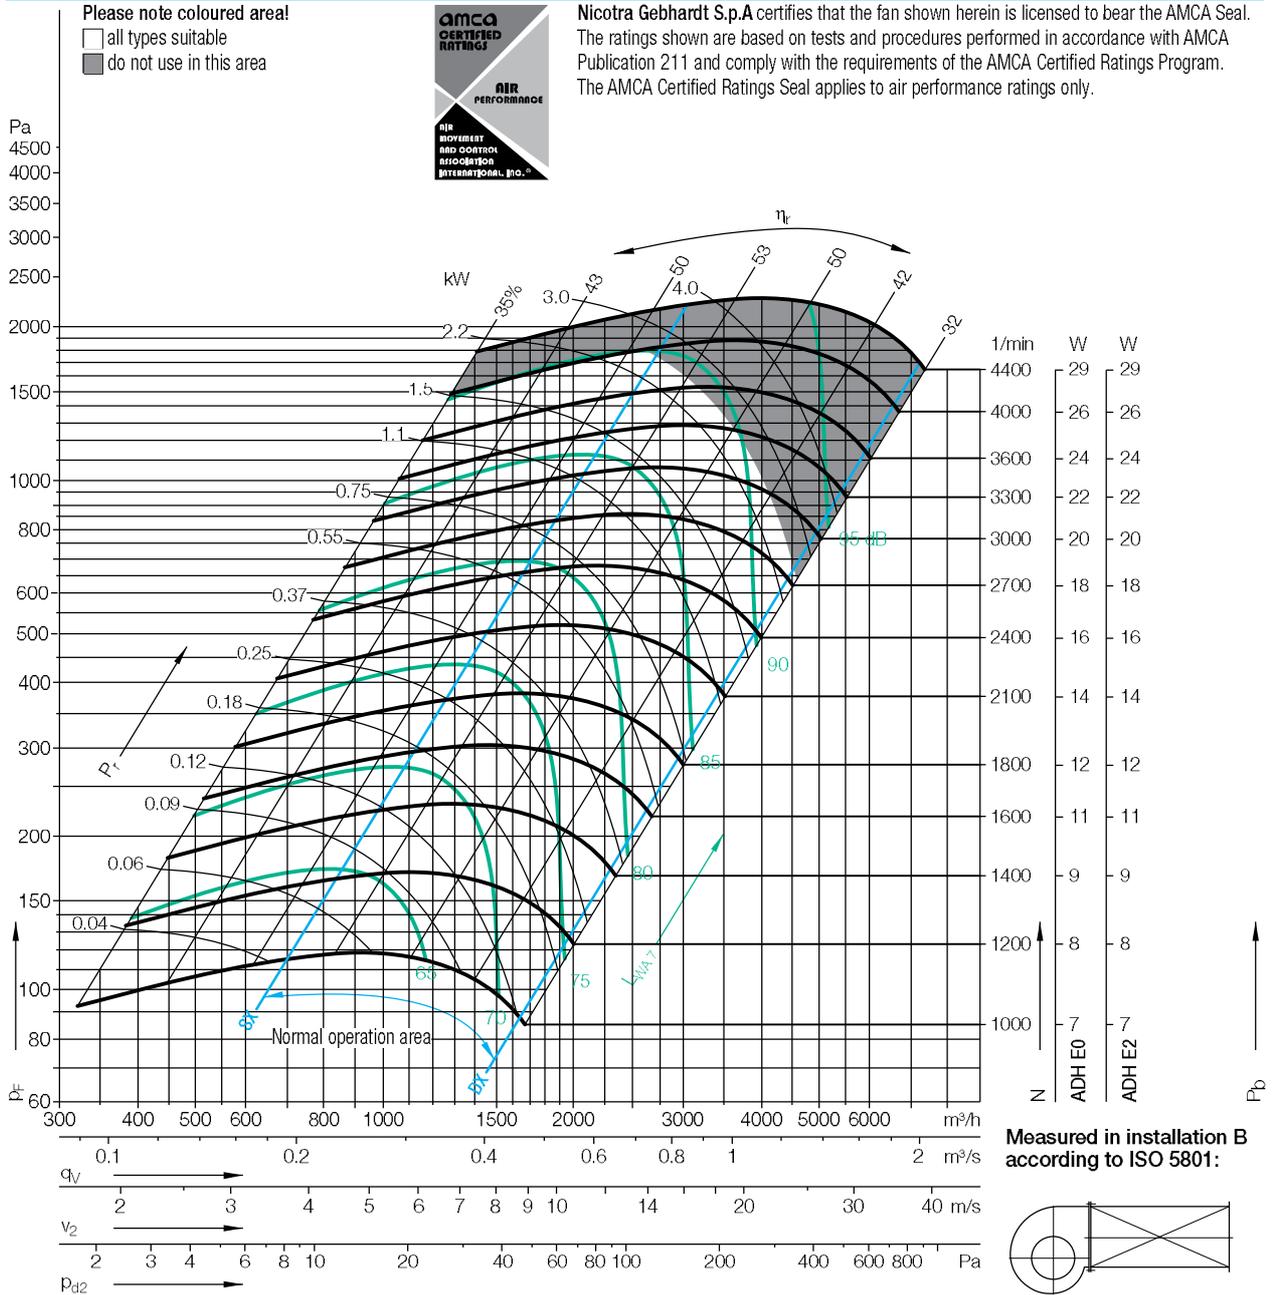

Duty point	Speed 1/min	dB
SX	3500	3
SX	2400	2
SX	1400	1
$q_{V,opt}$	3500	3
$q_{V,opt}$	2400	2
$q_{V,opt}$	1400	1
DX	3500	2
DX	2400	1
DX	1400	0

Relative sound power level for inlet side L_{WrelI} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
SX	-9	-7	-2	-5	-9	-7	-7	-10	dB
SX	-7	-4	-1	-10	-6	-6	-9	-11	dB
SX	-4	1	-7	-6	-5	-6	-9	-14	dB
$q_{V,opt}$	-11	-9	-3	-6	-9	-7	-7	-9	dB
$q_{V,opt}$	-8	-6	-2	-10	-6	-6	-7	-10	dB
$q_{V,opt}$	-6	-1	-8	-6	-5	-6	-9	-14	dB
DX	-19	-15	-8	-10	-10	-6	-6	-8	dB
DX	-17	-12	-7	-13	-7	-6	-6	-8	dB
DX	-13	-7	-12	-8	-6	-6	-7	-11	dB


Relative sound power level for discharge side L_{WrelE} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
SX	7	10	5	-1	-5	-5	-8	-11	dB
SX	10	8	2	-2	-5	-6	-8	-13	dB
SX	11	5	0	-4	-4	-7	-10	-16	dB
$q_{V,opt}$	4	9	4	-1	-6	-5	-7	-10	dB
$q_{V,opt}$	8	6	2	-3	-5	-6	-8	-12	dB
$q_{V,opt}$	9	4	-1	-4	-4	-6	-10	-15	dB
DX	-5	3	1	-4	-7	-4	-6	-8	dB
DX	-1	3	-4	-5	-6	-4	-7	-10	dB
DX	4	-2	-5	-6	-4	-7	-9	-13	dB


ADH E_-0180

Dimensions in mm, subject to change.

ADH E0-0180 6 kg

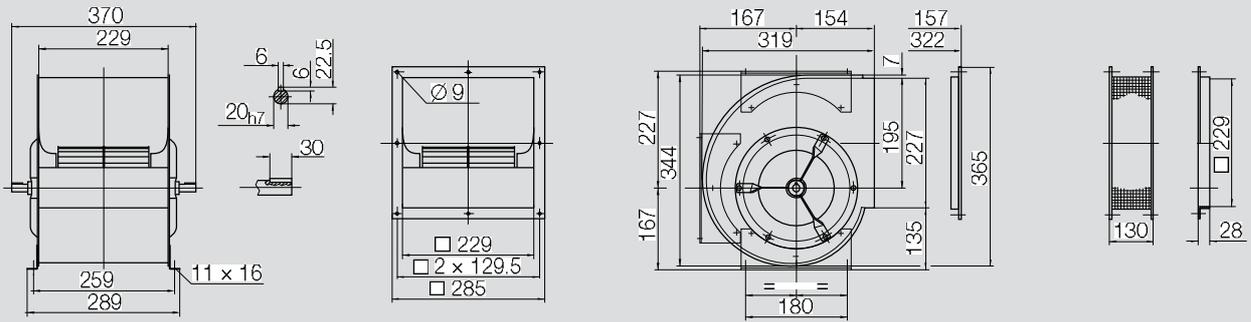

ADH E2-0180 7.8 kg

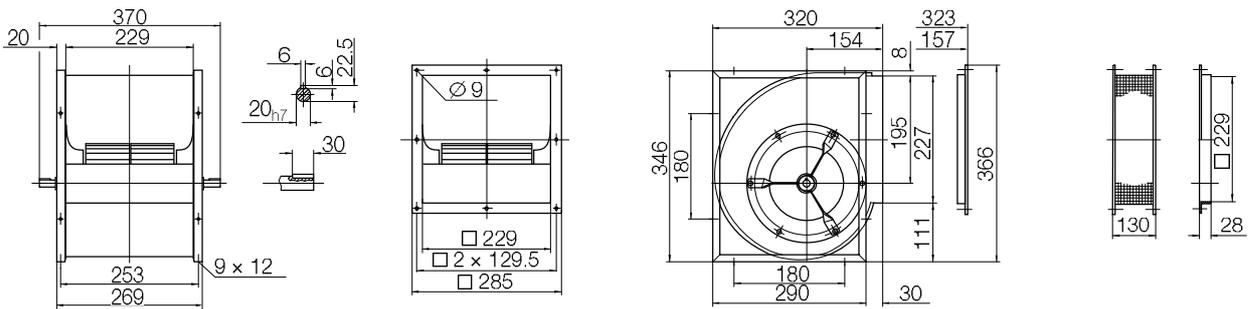

ADH E_-0200

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	200 mm
Number of blades	z	38
Moment of Inertia	J	0.014 kgm ²

Impeller Data

Impeller weight	m	1.6 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

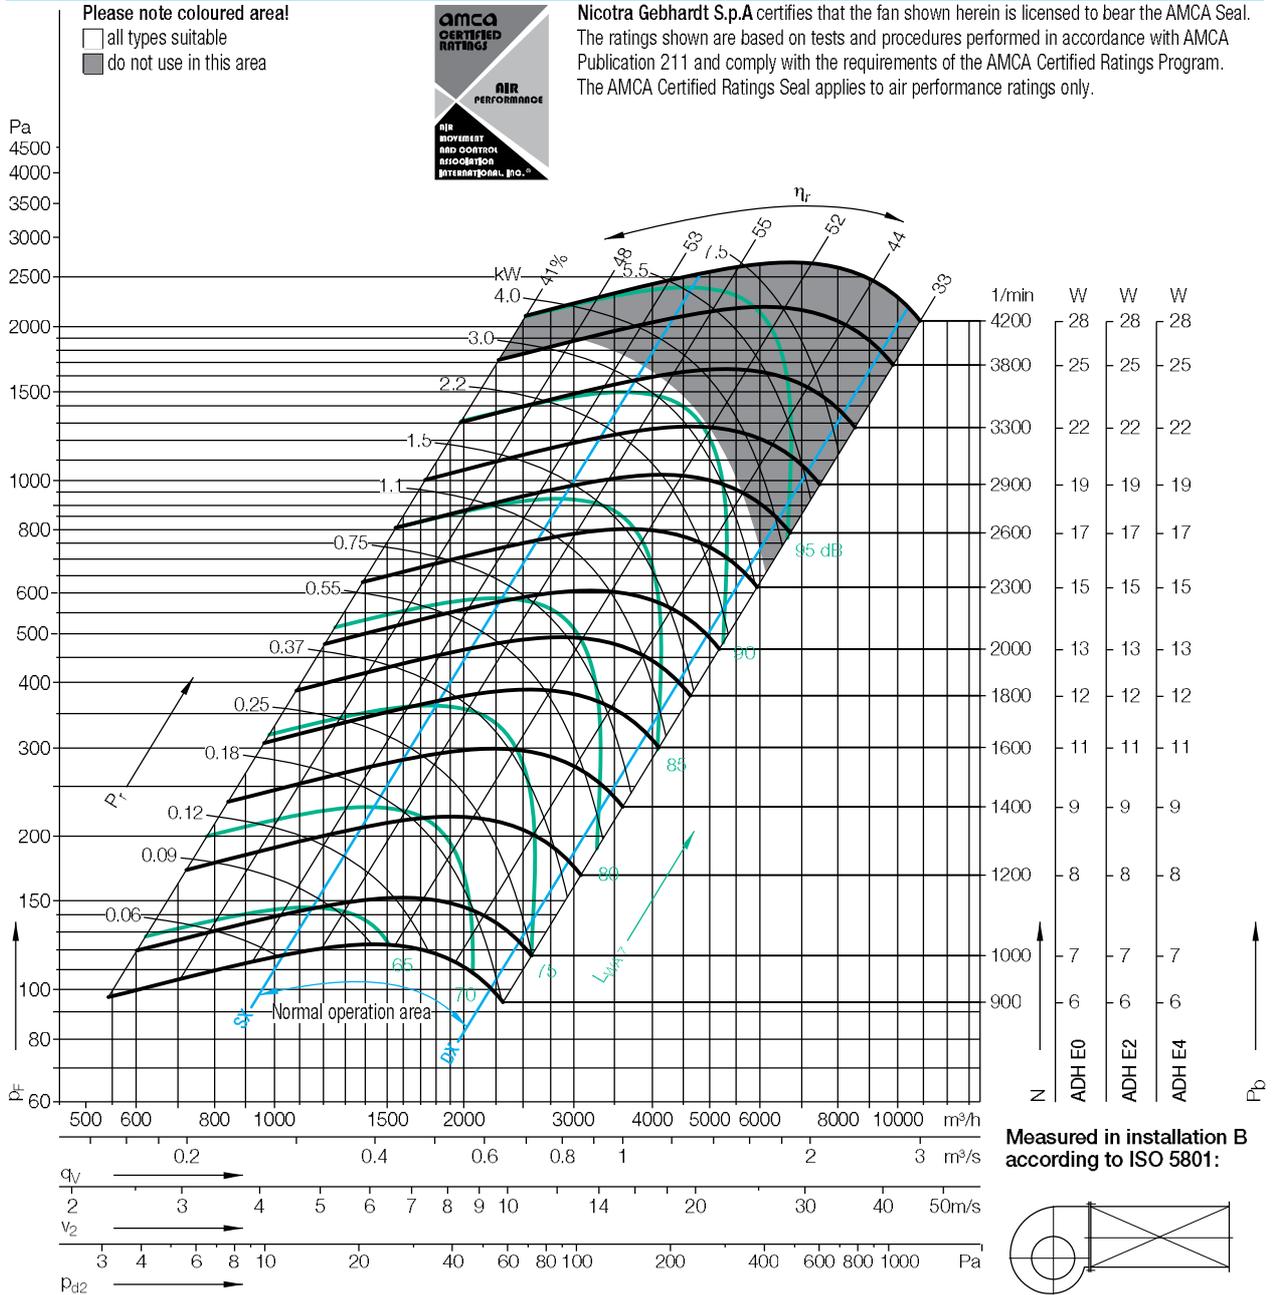

Duty point	Speed 1/min	dB
SX	3300	2
SX	2000	2
SX	1200	1
$Q_{V,opt}$	3300	2
$Q_{V,opt}$	2000	2
$Q_{V,opt}$	1200	1
DX	3300	3
DX	2000	2
DX	1200	1

Relative sound power level for inlet side L_{WrelI} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
SX 3300	-11	-9	1	-5	-10	-7	-8	-10	dB
SX 2000	-8	1	-2	-9	-6	-7	-8	-13	dB
SX 1200	-3	3	-6	-6	-5	-6	-10	-16	dB
$Q_{V,opt}$ 3300	-14	-11	-0	-6	-10	-6	-8	-9	dB
$Q_{V,opt}$ 2000	-11	-0	-3	-9	-6	-7	-7	-12	dB
$Q_{V,opt}$ 1200	-5	1	-7	-6	-5	-6	-9	-15	dB
DX 3300	-19	-15	-6	-8	-11	-6	-6	-7	dB
DX 2000	-16	-8	-7	-12	-6	-6	-6	-9	dB
DX 1200	-12	-5	-11	-8	-6	-6	-8	-10	dB


Relative sound power level for discharge side L_{WrelE} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
SX 3300	5	8	4	-2	-6	-6	-8	-11	dB
SX 2000	8	6	2	-4	-4	-7	-8	-14	dB
SX 1200	8	4	-1	-3	-5	-7	-10	-19	dB
$Q_{V,opt}$ 3300	3	5	2	-2	-6	-4	-8	-9	dB
$Q_{V,opt}$ 2000	5	3	1	-5	-3	-7	-7	-13	dB
$Q_{V,opt}$ 1200	5	3	-2	-3	-4	-7	-9	-18	dB
DX 3300	-4	2	0	-3	-7	-3	-5	-7	dB
DX 2000	-0	2	-2	-6	-3	-5	-6	-9	dB
DX 1200	3	-1	-5	-5	-3	-6	-8	-12	dB


ADH E_-0200

Dimensions in mm, subject to change.


ADH E0-0200 7.1 kg

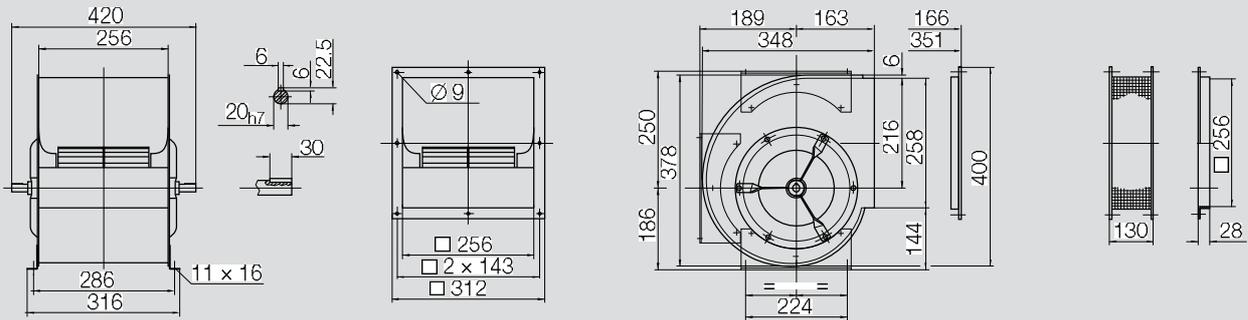

ADH E2-0200 9.1 kg

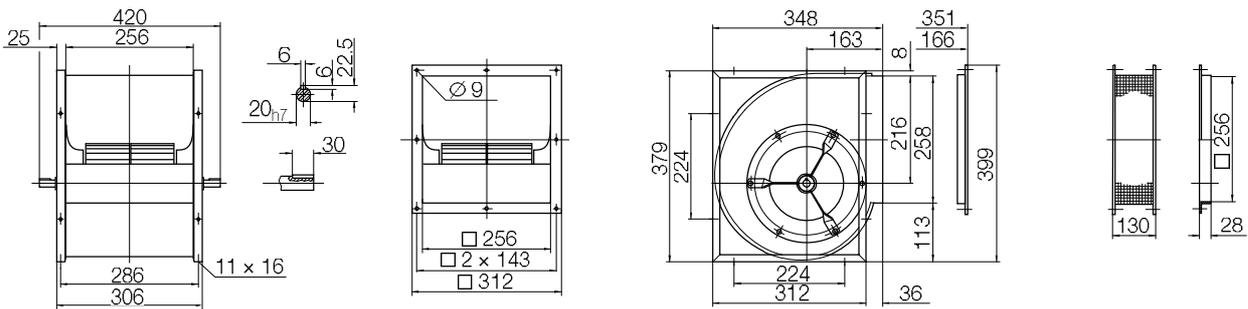

ADH E4-0200 12.6 kg

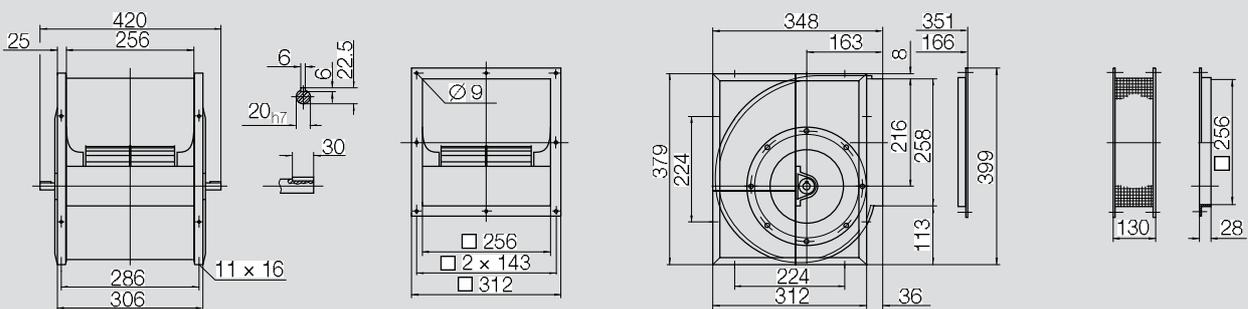

ADH E_-0225

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	225 mm
Number of blades	z	42
Moment of Inertia	J	0.020 kgm ²

Impeller Data

Impeller weight	m	1.8 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

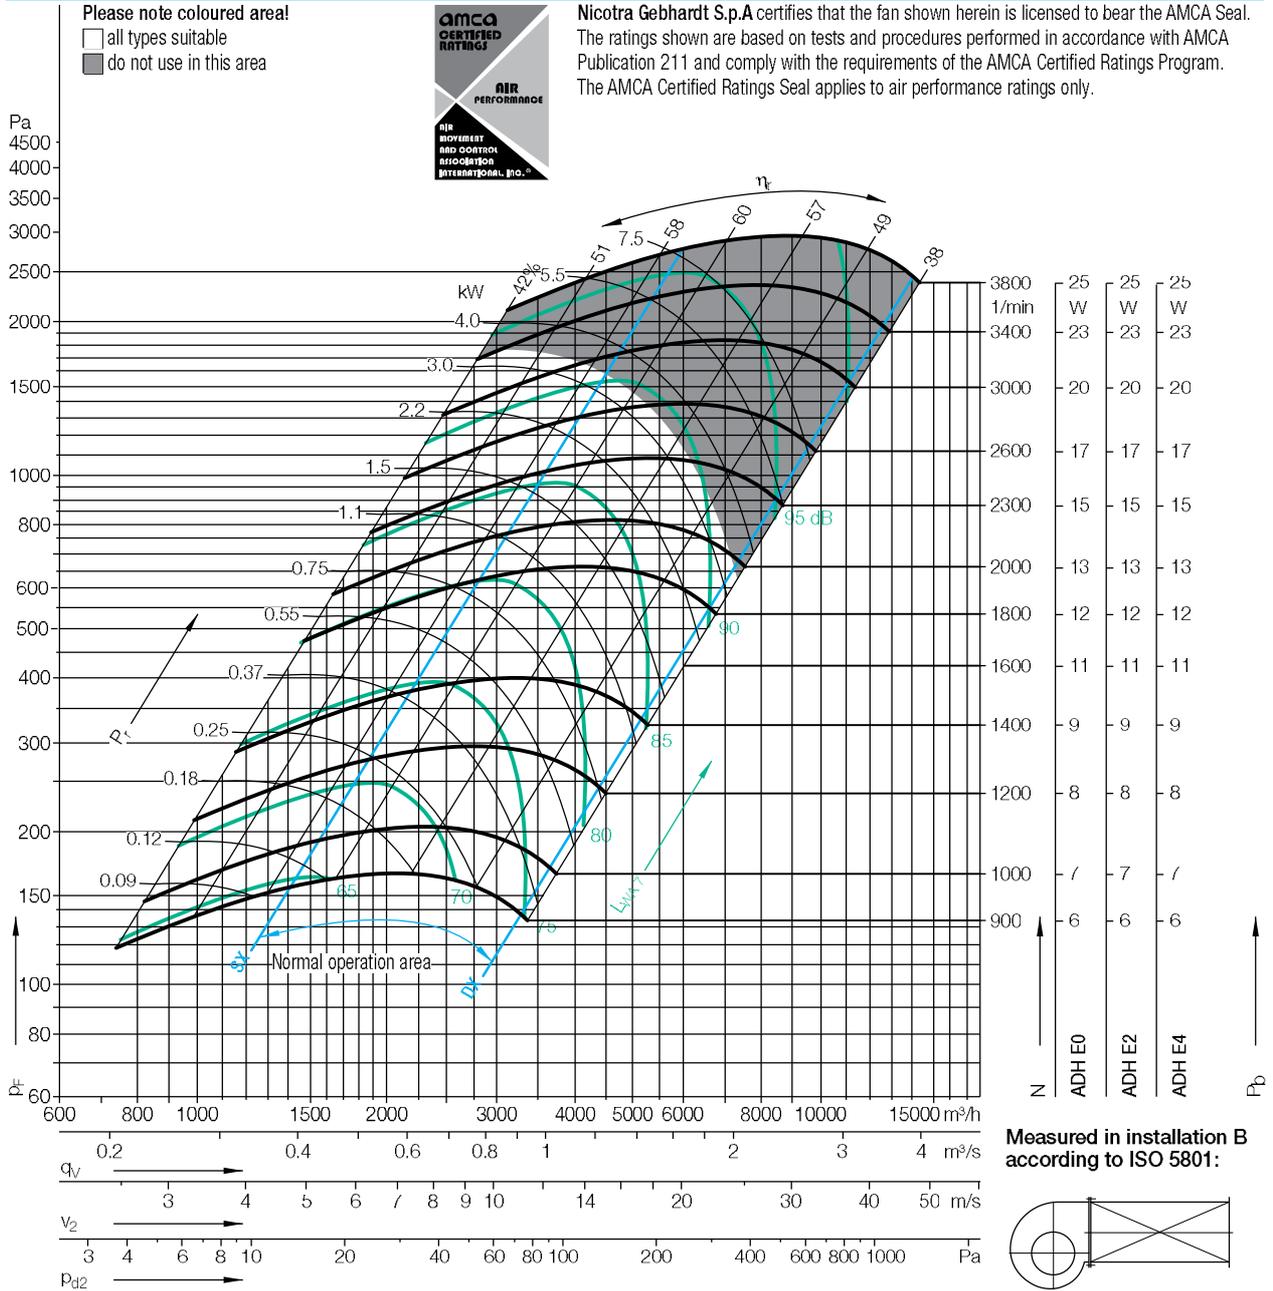

$\Delta L_{Wrel d(A)}$

Relative sound power level for inlet side $L_{Wrel i}$ at octave centre frequencies f_c

Relative sound power level for discharge side $L_{Wrel d}$ at octave centre frequencies f_c

Duty point	Speed 1/min	dB
SX	3000	4
SX	1800	2
SX	1000	1
$q_{v,opt}$	3000	3
$q_{v,opt}$	1800	2
$q_{v,opt}$	1000	1
DX	3000	3
DX	1800	2
DX	1000	1


	63	125	250	500	1000	2000	4000	8000	Hz
SX 3000	-9	-7	2	-4	-11	-7	-8	-11	dB
SX 1800	-7	2	0	-9	-7	-6	-8	-13	dB
SX 1000	2	4	-6	-5	-5	-6	-11	-16	dB
$q_{v,opt}$ 3000	-12	-10	1	-5	-11	-6	-8	-9	dB
$q_{v,opt}$ 1800	-10	-0	-1	-9	-6	-7	-7	-12	dB
$q_{v,opt}$ 1000	-1	2	-7	-5	-5	-6	-10	-15	dB
DX 3000	-16	-14	-7	-6	-11	-6	-7	-7	dB
DX 1800	-15	-9	-5	-11	-6	-7	-6	-8	dB
DX 1000	-10	-4	-10	-7	-6	-6	-8	-11	dB

	63	125	250	500	1000	2000	4000	8000	Hz
ADH E0 3000	6	7	9	-2	-6	-6	-10	-12	dB
ADH E0 1800	8	10	4	-4	-4	-8	-10	-14	dB
ADH E0 1000	12	9	-1	-3	-5	-8	-12	-19	dB
ADH E2 3000	4	5	8	-2	-6	-4	-9	-10	dB
ADH E2 1800	5	8	3	-4	-3	-7	-8	-12	dB
ADH E2 1000	9	7	-2	-2	-5	-7	-10	-16	dB
ADH E4 3000	-1	2	2	-3	-6	-3	-5	-7	dB
ADH E4 1800	0	3	-1	-5	-3	-5	-6	-9	dB
ADH E4 1000	3	1	-4	-4	-4	-5	-8	-12	dB


ADH E_-0225

Dimensions in mm, subject to change.


ADH E0-0225 8.5 kg

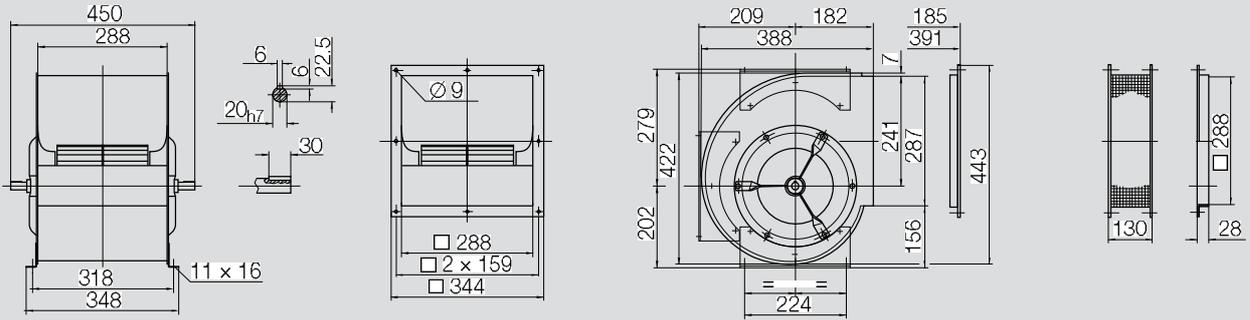

ADH E2-0225 10.7 kg

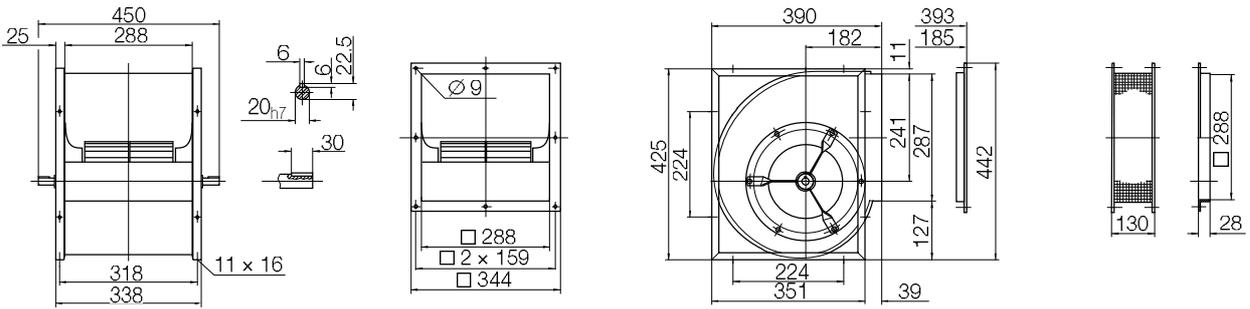

ADH E4-0225 14.5 kg

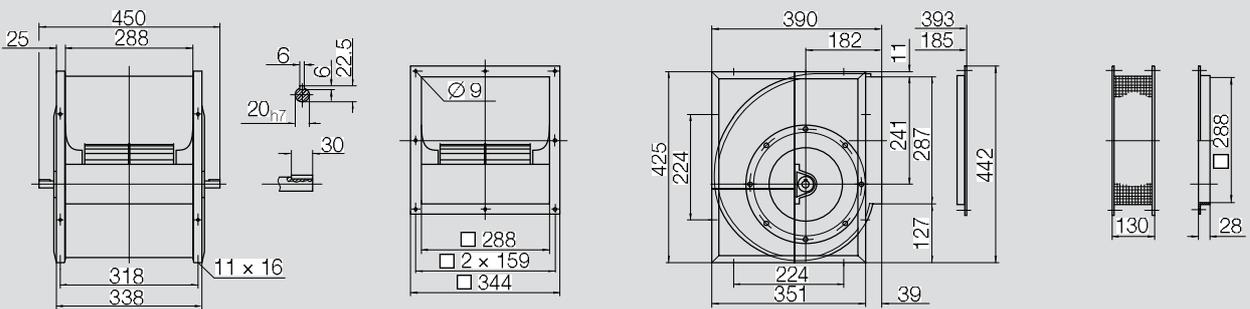

ADH E_-0250

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	250 mm
Number of blades	z	38
Moment of Inertia	J	0.036 kgm ²

Impeller Data

Impeller weight	m	2.7 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

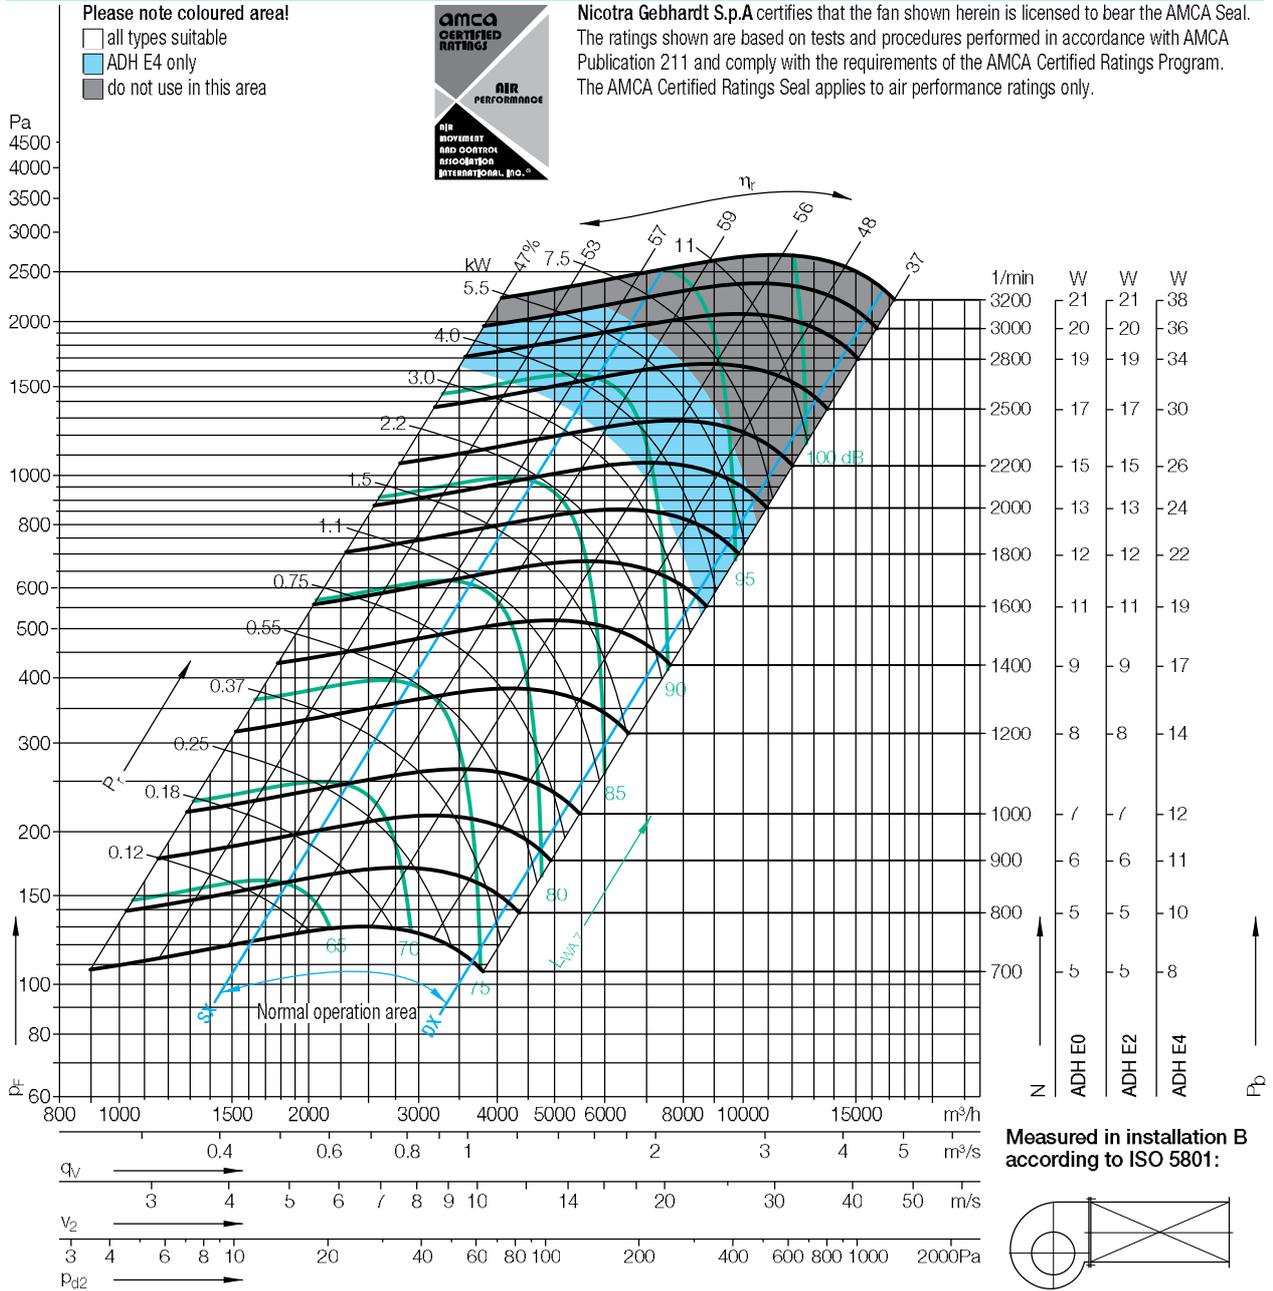

Duty point	Speed 1/min	$\Delta L_{Wrel d(A)}$ dB
SX	2800	2
SX	1600	1
SX	1000	0
$Q_{V,opt}$	2800	2
$Q_{V,opt}$	1600	1
$Q_{V,opt}$	1000	1
DX	2800	2
DX	1600	2
DX	1000	1


$\Delta L_{Wrel d(A)}$ Relative sound power level for inlet side $L_{Wrel i7}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
-7	-6	-1	-5	-11	-5	-8	-10		dB
-6	-4	-1	-10	-4	-7	-8	-13		dB
-5	2	-7	-5	-5	-7	-10	-15		dB
-9	-8	-2	-6	-11	-5	-8	-9		dB
-8	-6	-3	-10	-4	-8	-8	-12		dB
-7	1	-8	-4	-5	-7	-9	-15		dB
-12	-11	-9	-8	-12	-5	-7	-7		dB
-12	-10	-7	-12	-5	-7	-7	-8		dB
-11	-6	-10	-6	-6	-7	-7	-11		dB

Relative sound power level for discharge side $L_{Wrel d4}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
6	6	2	-3	-6	-4	-10	-11		dB
7	3	0	-4	-3	-9	-9	-14		dB
6	2	-2	-2	-6	-8	-11	-19		dB
4	3	0	-3	-5	-3	-10	-9		dB
4	1	-1	-5	-2	-9	-9	-13		dB
4	1	-3	-1	-6	-8	-10	-17		dB
0	1	-1	-4	-7	-2	-7	-7		dB
1	-0	-4	-7	-2	-6	-7	-9		dB
1	-3	-5	-3	-4	-7	-8	-11		dB


ADH E_-0250

Dimensions in mm, subject to change.


ADH E0-0250 10.5 kg

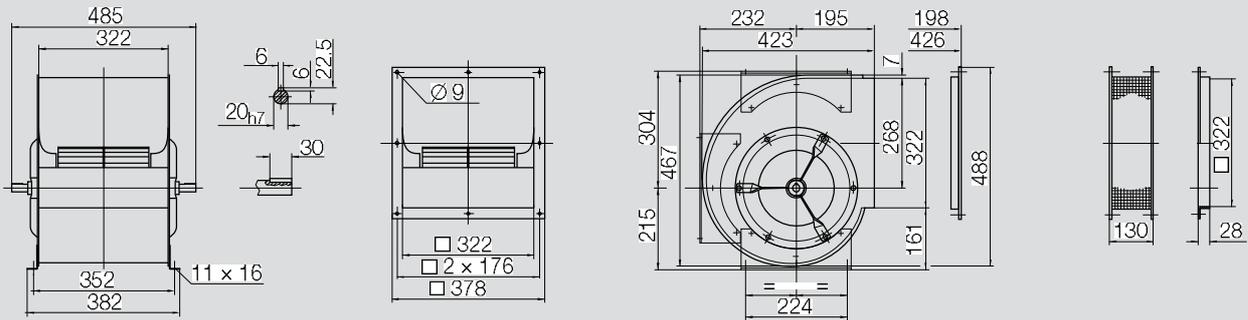

ADH E2-0250 13 kg

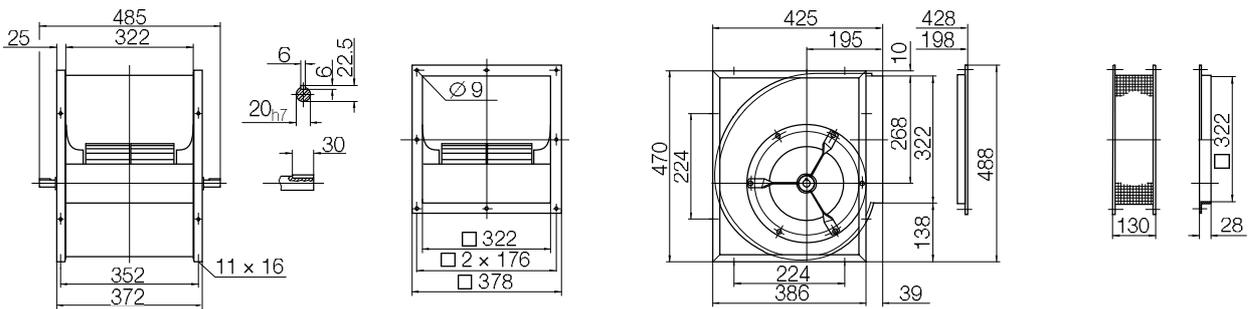

ADH E4-0250 18 kg

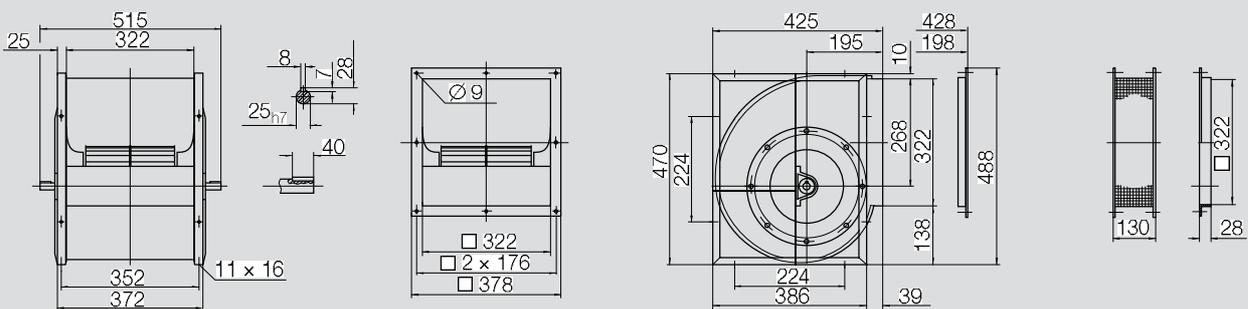

ADH E_-0280

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	280 mm
Number of blades	z	42
Moment of Inertia	J	0.059 kgm ²

Impeller Data

Impeller weight	m	3.5 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

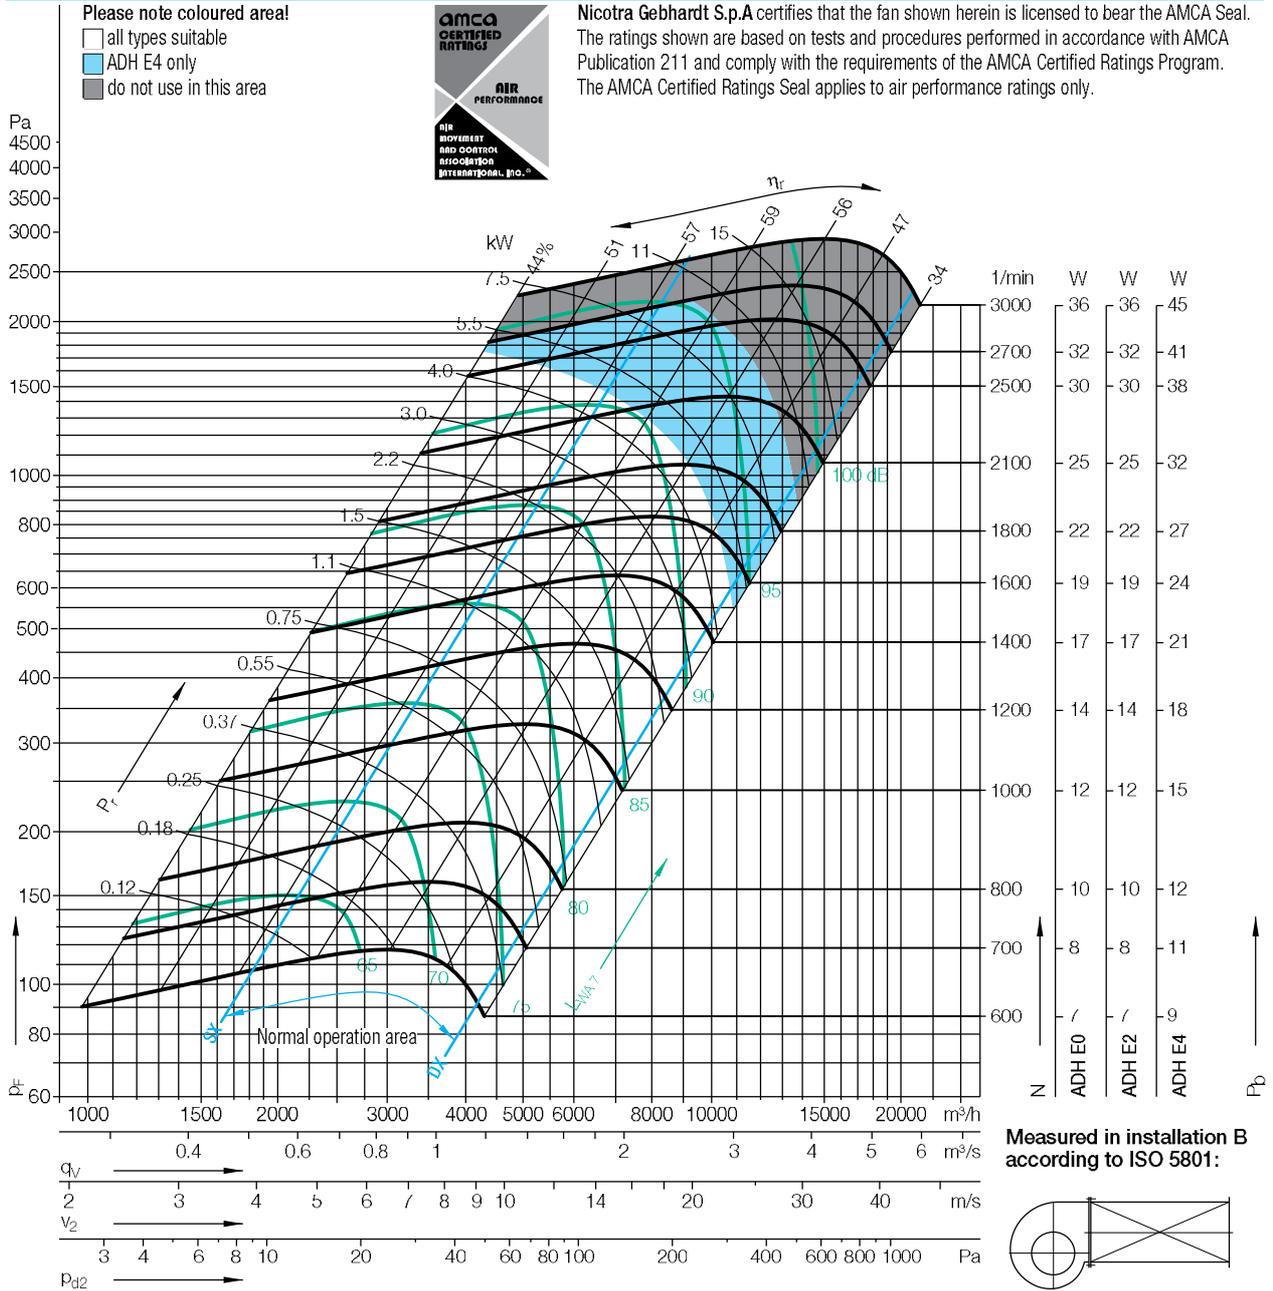

Duty point	Speed 1/min	dB
SX	2500	3
SX	1400	2
SX	800	0
$q_{v,opt}$	2500	3
$q_{v,opt}$	1400	2
$q_{v,opt}$	800	1
DX	2500	2
DX	1400	1
DX	800	0

Relative sound power level for inlet side L_{WrelI} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
SX	-6	-6	1	-4	-9	-6	-9	-12	dB
SX	-4	3	-2	-8	-4	-7	-10	-13	dB
SX	2	2	-6	-3	-6	-7	-11	-16	dB
$q_{v,opt}$	-10	-10	-1	-6	-10	-5	-9	-11	dB
$q_{v,opt}$	-9	0	-4	-9	-4	-7	-9	-13	dB
$q_{v,opt}$	-0	-0	-8	-3	-6	-7	-10	-16	dB
DX	-10	-9	-6	-7	-11	-5	-7	-7	dB
DX	-9	-6	-6	-11	-5	-7	-7	-10	dB
DX	-6	-4	-10	-5	-6	-5	-9	-14	dB


Relative sound power level for discharge side L_{WrelD} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
SX	5	5	7	-1	-5	-6	-11	-13	dB
SX	7	9	1	-4	-3	-9	-11	-16	dB
SX	11	5	-1	-1	-7	-9	-13	-21	dB
$q_{v,opt}$	1	1	5	-2	-5	-4	-10	-12	dB
$q_{v,opt}$	2	7	-0	-4	-2	-9	-10	-14	dB
$q_{v,opt}$	7	3	-2	-1	-7	-8	-12	-19	dB
DX	3	3	1	-2	-5	-3	-8	-9	dB
DX	3	2	-2	-5	-3	-8	-9	-12	dB
DX	4	-0	-4	-2	-6	-7	-10	-16	dB


ADH E_-0280

Dimensions in mm, subject to change.


ADH E0-0280 14.2 kg

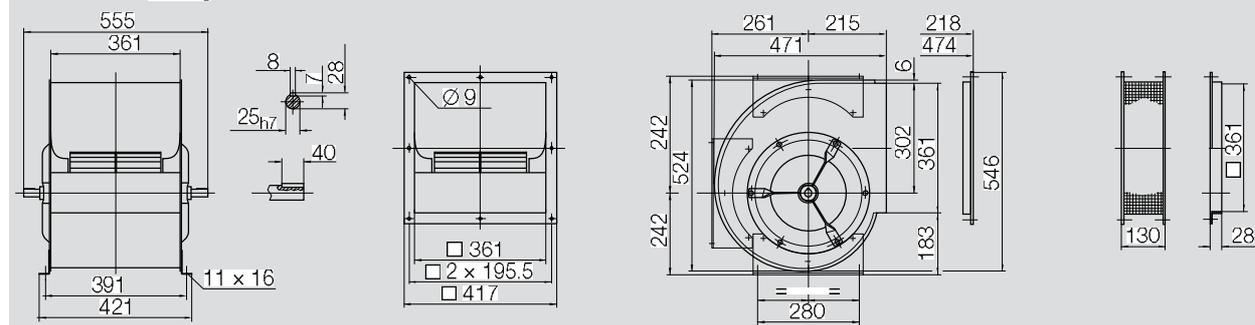

ADH E2-0280 18 kg

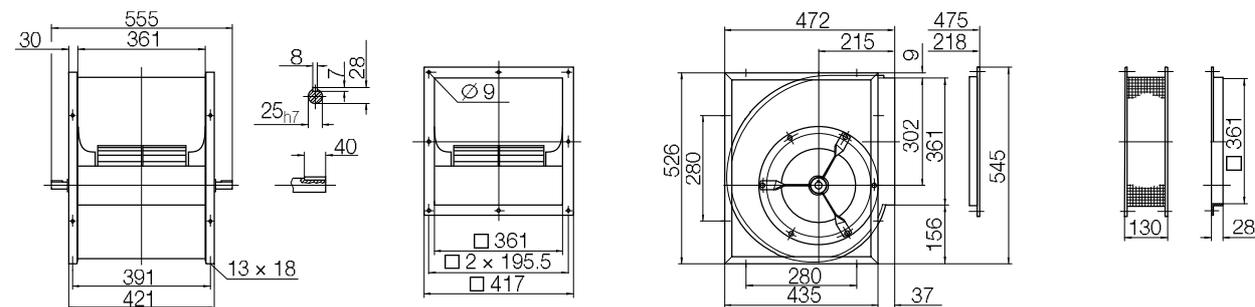

ADH E4-0280 24 kg

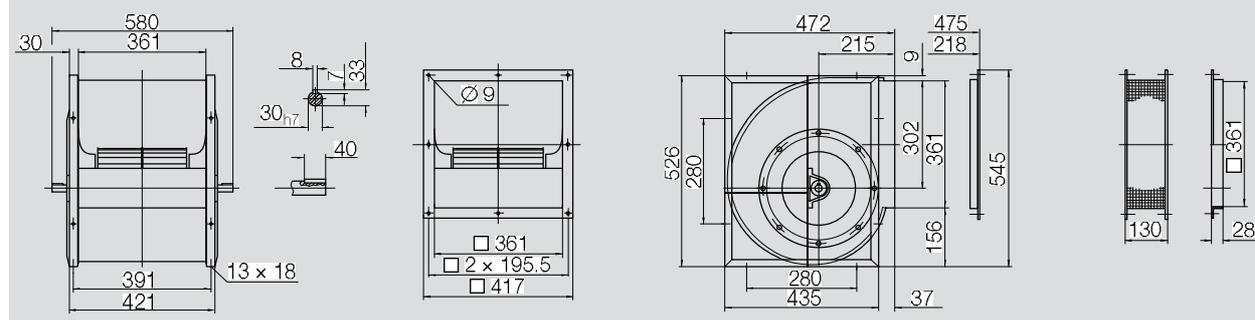

ADH E_-0315

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	315 mm
Number of blades	z	38
Moment of Inertia	J	0.100 kgm ²

Impeller Data

Impeller weight	m	4.6 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

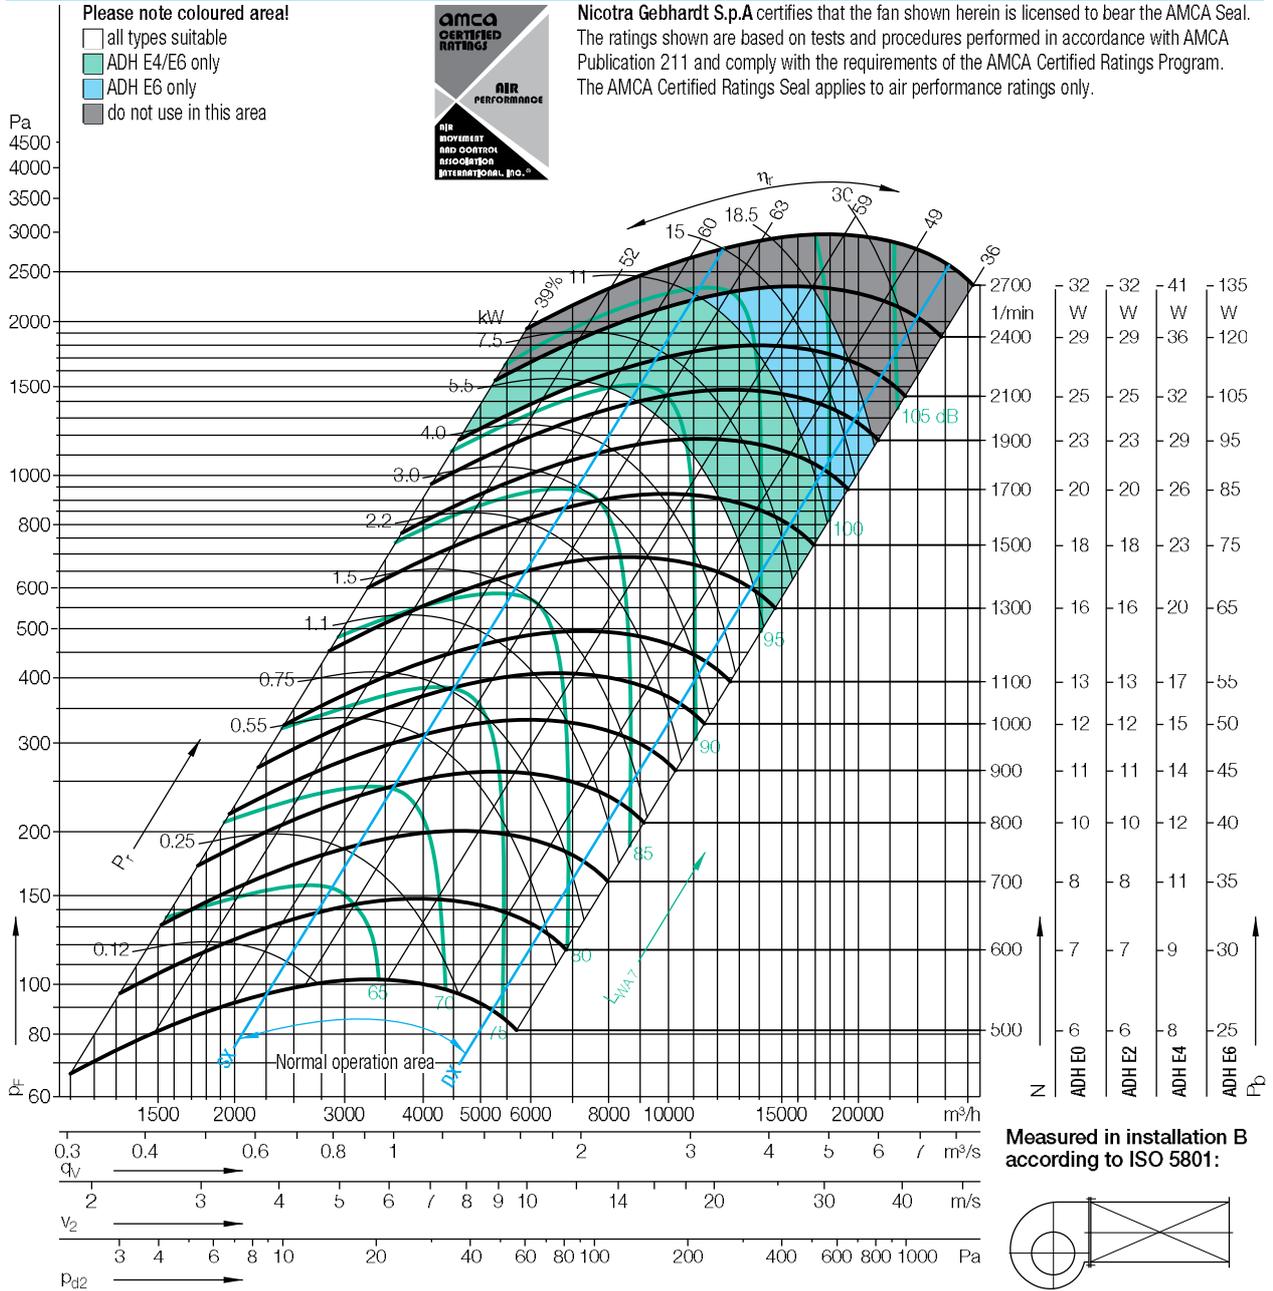

$\Delta L_{Wrel4}(A)$

Relative sound power level for inlet side L_{Wrel17} at octave centre frequencies f_c

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

Duty point	Speed 1/min	dB
SX	2100	4
SX	1300	3
SX	700	2
$Q_{V,opt}$	2100	4
$Q_{V,opt}$	1300	3
$Q_{V,opt}$	700	3
DX	2100	3
DX	1300	2
DX	700	2


	63	125	250	500	1000	2000	4000	8000	Hz
	-1	-1	-3	-6	-7	-6	-9	-11	dB
	0	-2	-3	-9	-7	-8	-9	-13	dB
	1	-1	-7	-2	-6	-7	-11	-18	dB
	-4	-3	-4	-7	-7	-6	-8	-10	dB
	-3	-4	-4	-9	-4	-8	-9	-13	dB
	-2	-3	-7	-2	-6	-7	-10	-17	dB
	-5	-5	-7	-9	-8	-6	-7	-8	dB
	-5	-7	-7	-12	-5	-7	-7	-10	dB
	-5	-6	-11	-4	-6	-6	-9	-14	dB

	63	125	250	500	1000	2000	4000	8000	Hz
	10	10	3	-1	-2	-5	-9	-8	dB
	11	6	1	-3	-1	-8	-7	-11	dB
	9	3	-1	1	-6	-6	-8	-17	dB
	6	6	1	-2	-1	-4	-9	-7	dB
	7	4	-1	-3	-0	-7	-7	-10	dB
	6	2	-1	2	-5	-5	-7	-16	dB
	4	4	-3	-5	-3	-4	-8	-6	dB
	4	0	-4	-7	-1	-7	-6	-8	dB
	2	-3	-6	-0	-6	-5	-6	-13	dB


ADH E_-0315

Dimensions in mm, subject to change.


ADH E0-0315 18 kg

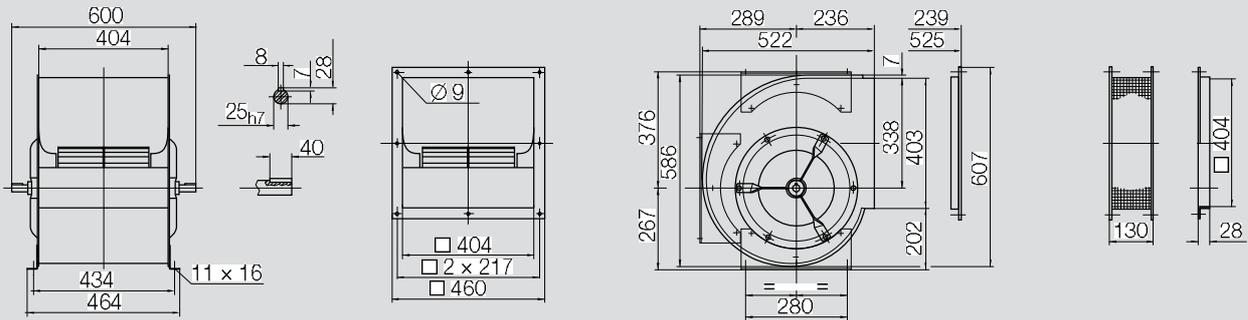


ADH E2-0315 22 kg

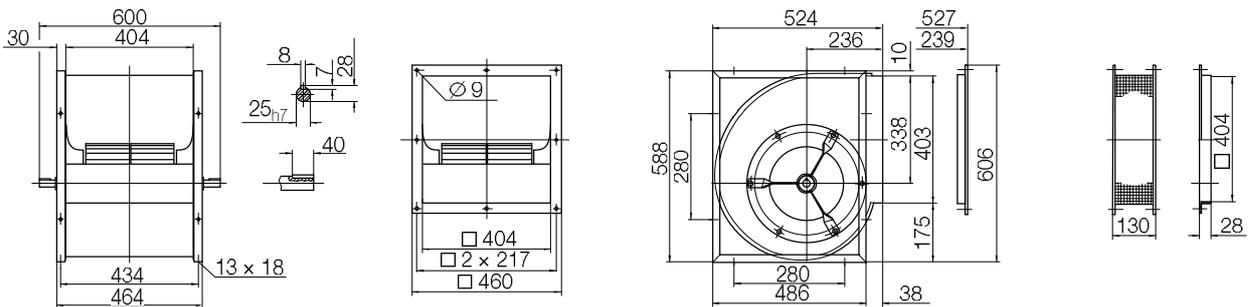

ADH E4-0315 29 kg

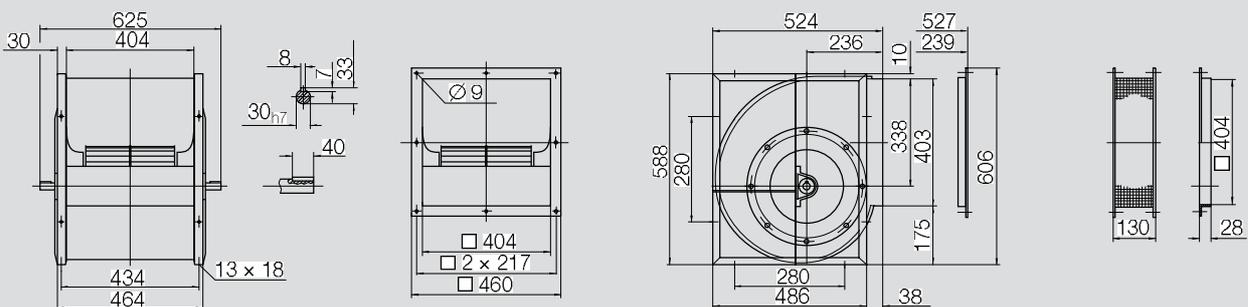

ADH E6-0315 30 kg

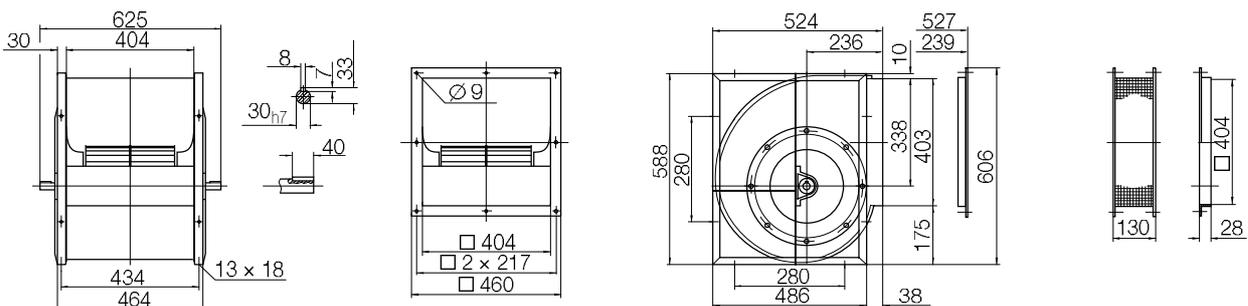

ADH E_-0355

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	355 mm
Number of blades	z	42
Moment of Inertia	J	0.150 kgm ²

Impeller Data

Impeller weight	m	5.5 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

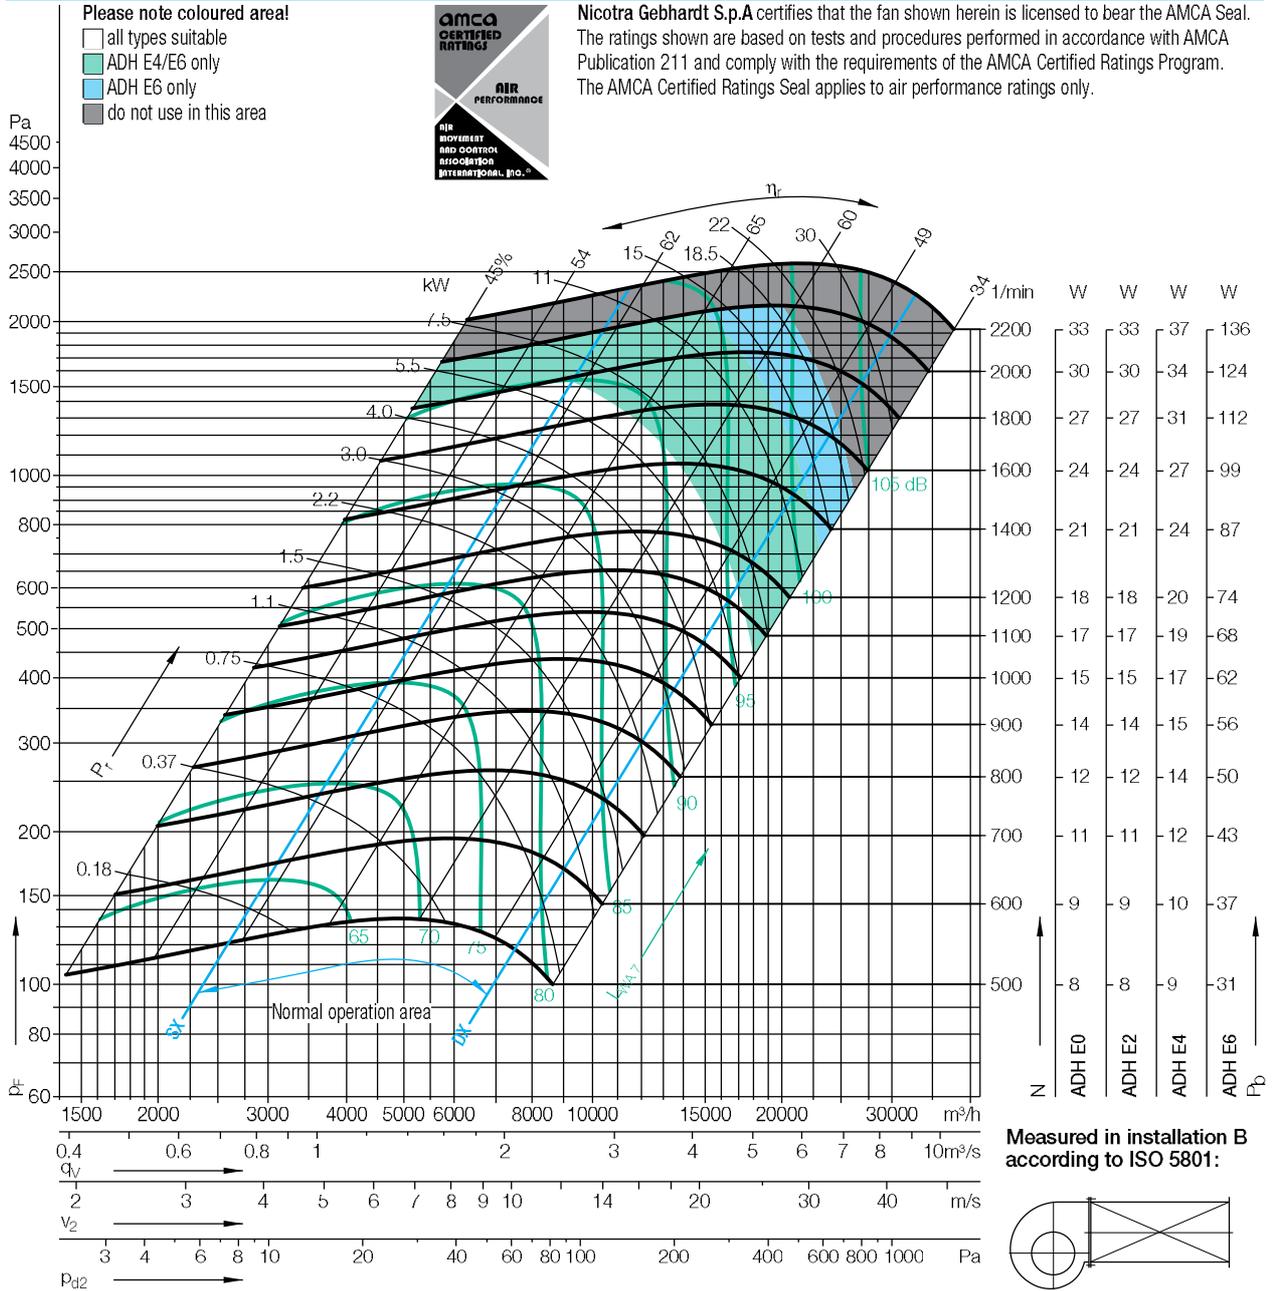

$\Delta L_{Wrel4}(A)$

Relative sound power level for inlet side L_{Wrel17} at octave centre frequencies f_c

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

Duty point	Speed 1/min	dB
SX	1800	4
SX	1200	3
SX	600	2
$Q_{V,opt}$	1800	3
$Q_{V,opt}$	1200	2
$Q_{V,opt}$	600	2
DX	1800	2
DX	1200	2
DX	600	1


	63	125	250	500	1000	2000	4000	8000	Hz
	3	2	-1	-6	-6	-7	-9	-12	dB
	4	0	-2	-6	-5	-7	-10	-14	dB
	3	-0	-4	-3	-5	-7	-12	-19	dB
	-3	-3	-5	-8	-5	-7	-8	-10	dB
	-2	-4	-6	-7	-4	-7	-9	-13	dB
	-2	-4	-6	-3	-5	-7	-11	-17	dB
	-8	-8	-9	-11	-6	-7	-6	-7	dB
	-8	-10	-9	-10	-5	-7	-6	-10	dB
	-9	-9	-10	-5	-6	-5	-9	-14	dB

	63	125	250	500	1000	2000	4000	8000	Hz
	13	11	3	-1	-2	-7	-9	-10	dB
	14	6	3	-2	-3	-8	-8	-13	dB
	9	5	1	-1	-6	-5	-11	-18	dB
	6	5	0	-3	-2	-6	-8	-8	dB
	7	2	-1	-2	-2	-8	-7	-12	dB
	3	1	-1	-0	-6	-5	-10	-17	dB
	2	2	-3	-6	-3	-5	-7	-6	dB
	2	-3	-4	-6	-3	-8	-6	-9	dB
	-2	-3	-5	-2	-7	-5	-8	-13	dB


ADH E_-0355

Dimensions in mm, subject to change.


ADH E0-0355 23 kg

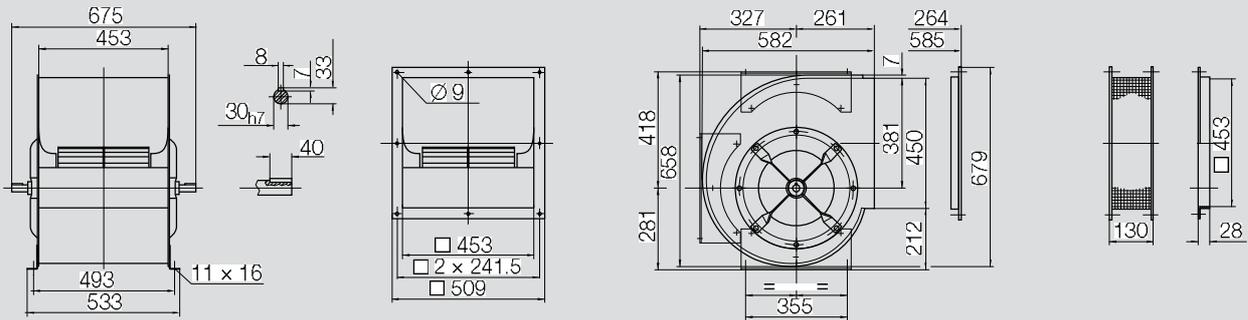


ADH E2-0355 29 kg

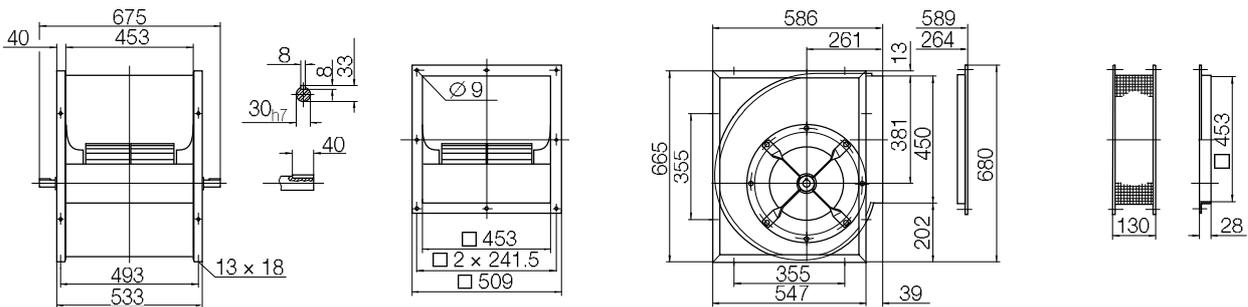

ADH E4-0355 41 kg

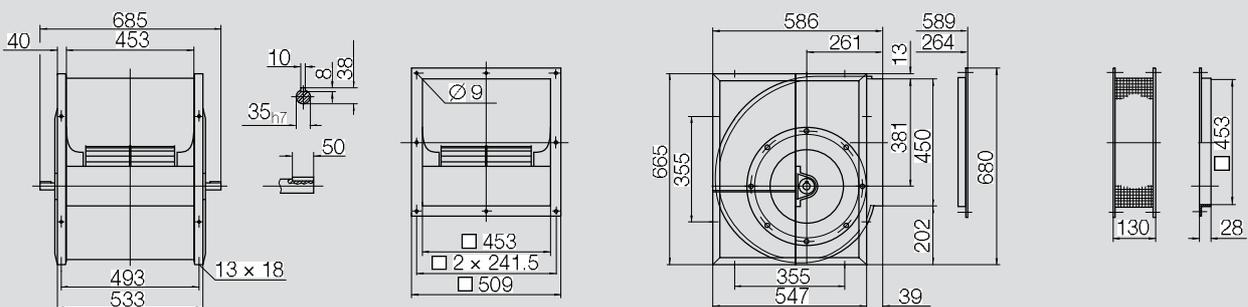

ADH E6-0355 42 kg

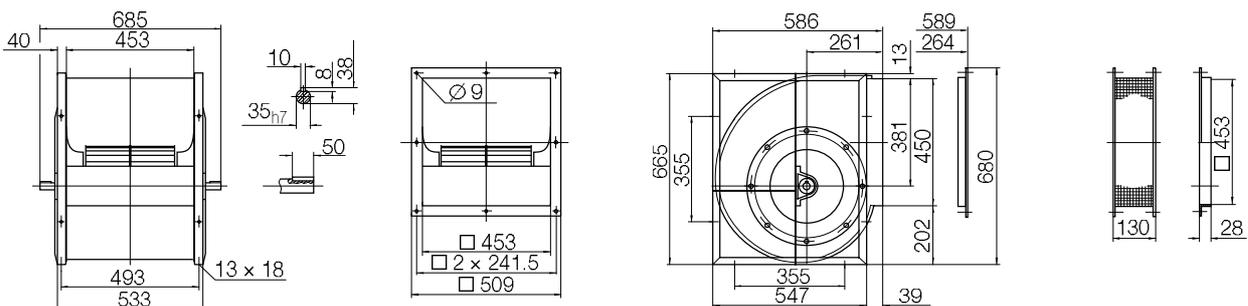

ADH E_-0400

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	400 mm
Number of blades	z	38
Moment of Inertia	J	0.310 kgm ²

Impeller Data

Impeller weight	m	9 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

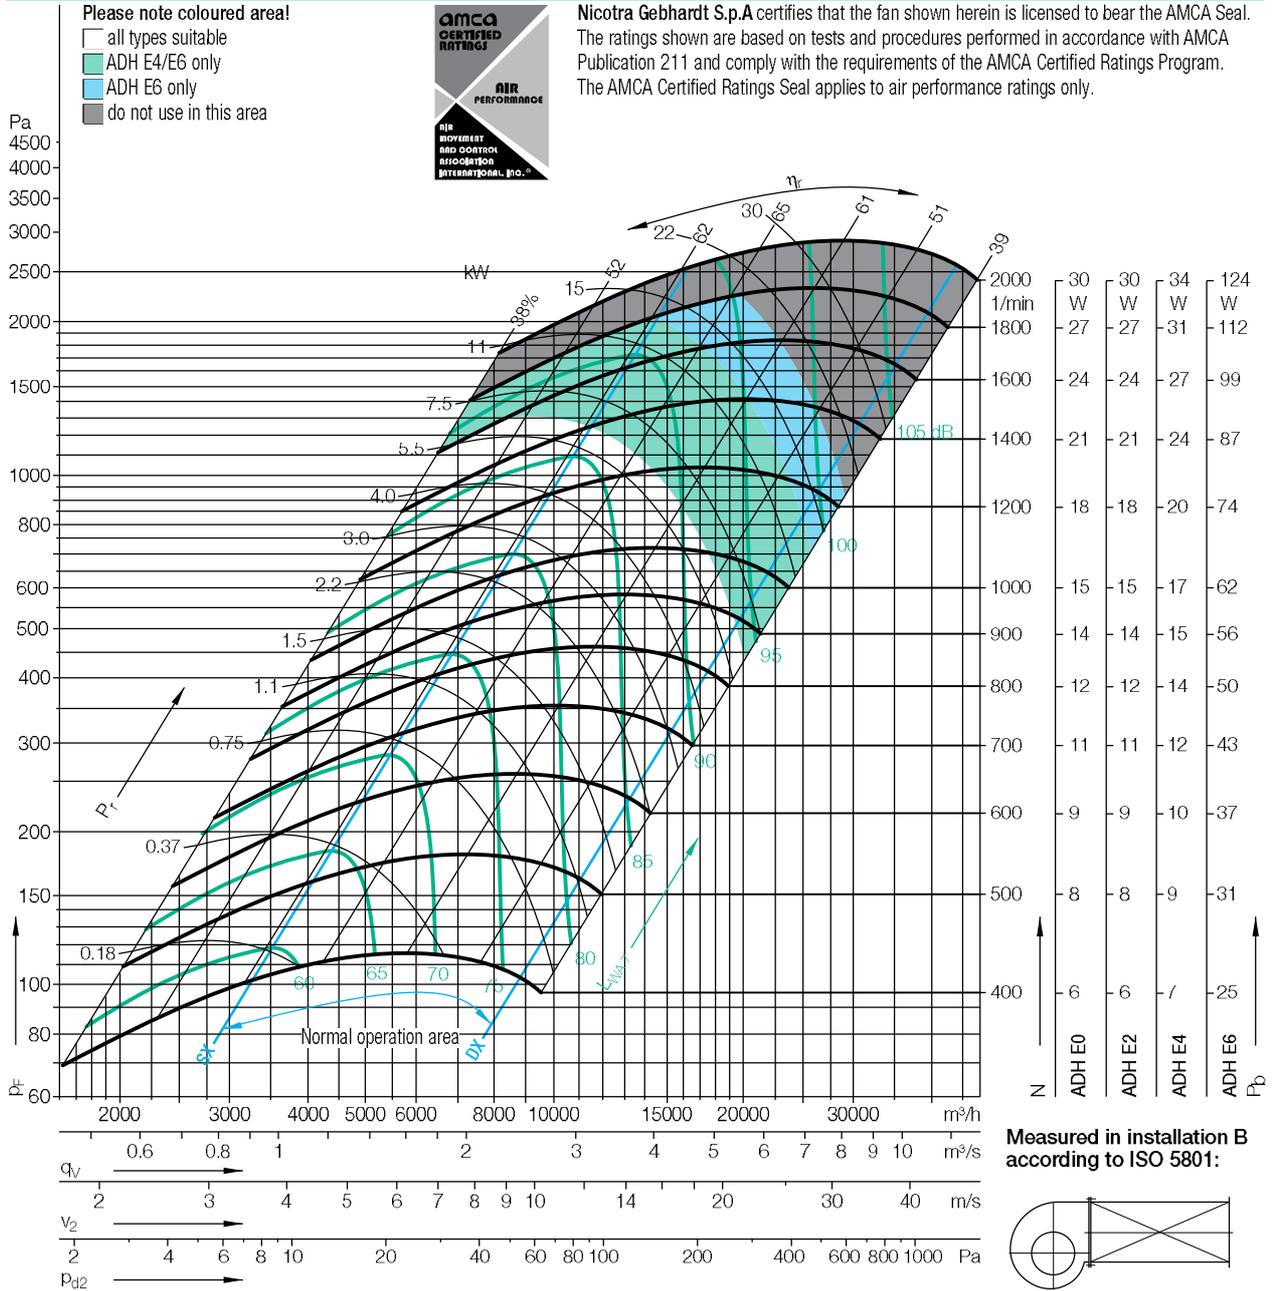

$\Delta L_{Wrel4}(A)$

Relative sound power level for inlet side L_{Wrel17} at octave centre frequencies f_c

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

Duty point	Speed 1/min	dB
SX	1600	5
SX	1000	4
SX	500	3
$Q_{V,opt}$	1600	4
$Q_{V,opt}$	1000	4
$Q_{V,opt}$	500	2
DX	1600	3
DX	1000	2
DX	500	1


	63	125	250	500	1000	2000	4000	8000	Hz
	4	3	-3	-7	-5	-8	-8	-11	dB
	5	0	-5	-4	-6	-7	-9	-14	dB
	2	-3	-2	-4	-5	-7	-12	-19	dB
	-2	-3	-7	-9	-5	-7	-8	-10	dB
	-1	-5	-8	-5	-6	-7	-8	-13	dB
	-3	-6	-3	-4	-5	-6	-11	-17	dB
	-7	-8	-11	-11	-7	-6	-6	-7	dB
	-7	-10	-11	-9	-6	-7	-6	-10	dB
	-9	-10	-8	-5	-6	-6	-9	-14	dB

	63	125	250	500	1000	2000	4000	8000	Hz
	11	10	5	0	1	-6	-9	-8	dB
	12	7	2	3	-3	-7	-7	-12	dB
	9	4	5	-1	-5	-5	-10	-20	dB
	5	5	1	-2	1	-5	-8	-7	dB
	6	3	0	2	-3	-7	-6	-11	dB
	4	1	4	-1	-5	-4	-9	-18	dB
	2	1	-3	-6	-1	-4	-7	-6	dB
	2	-3	-4	-2	-3	-6	-6	-9	dB
	-2	-3	-1	-2	-5	-5	-8	-15	dB


ADH E_-0400

Dimensions in mm, subject to change.


ADH E0-0400 31 kg

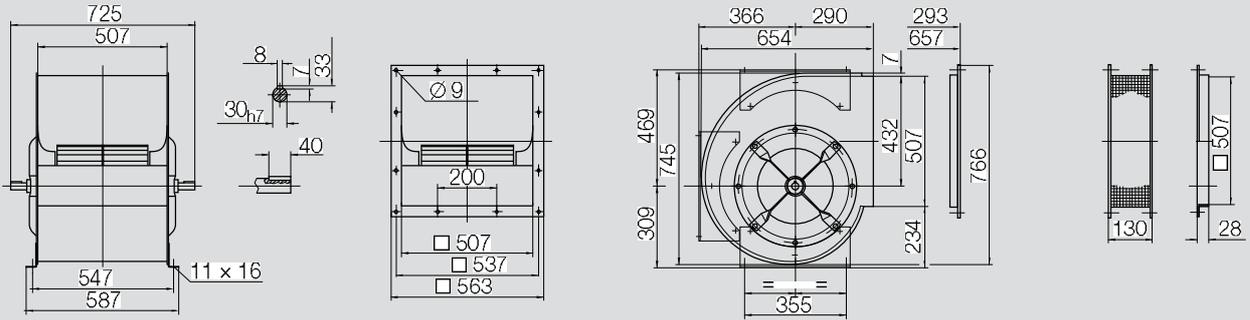


ADH E2-0400 38 kg

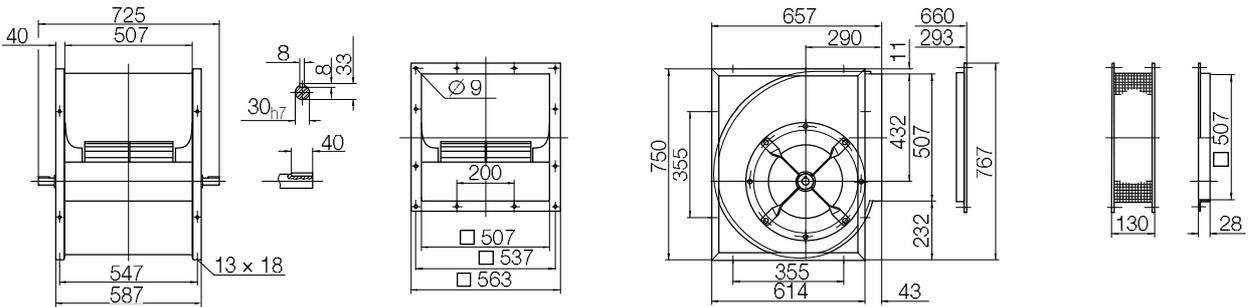

ADH E4-0400 52 kg

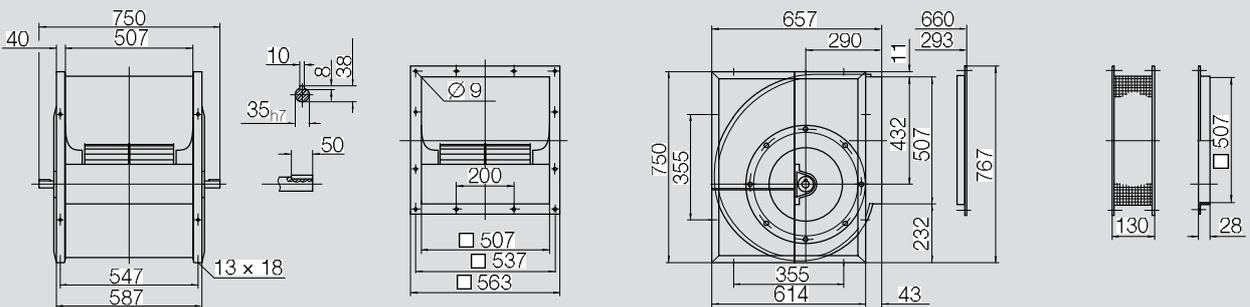

ADH E6-0400 53 kg

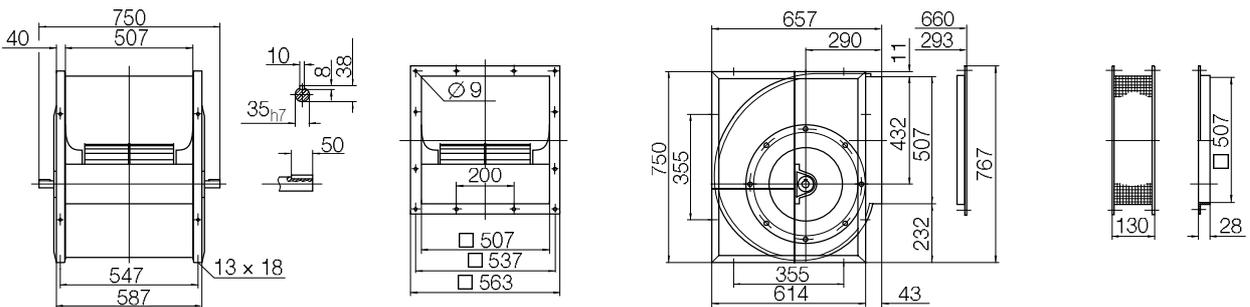

ADH E_-0450

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	450 mm
Number of blades	z	42
Moment of Inertia	J	0.480 kgm ²

Impeller Data

Impeller weight	m	11 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

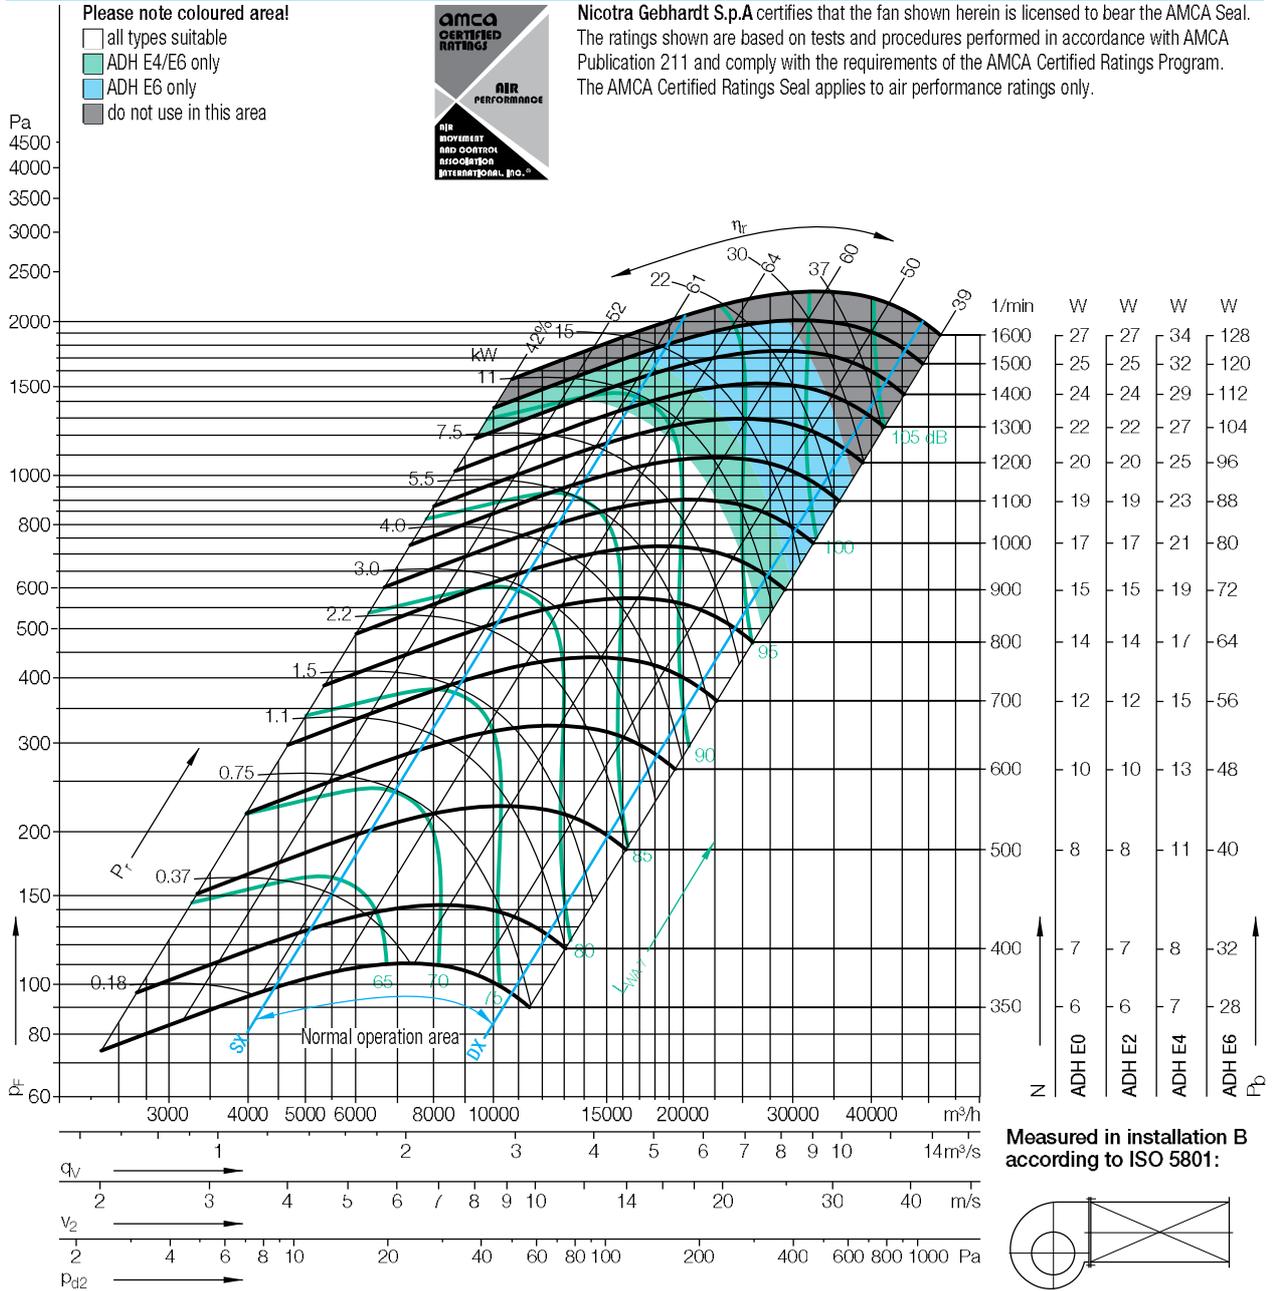

Duty point	Speed 1/min	dB
SX	1400	3
SX	1000	3
SX	500	2
$Q_{V,opt}$	1400	3
$Q_{V,opt}$	1000	3
$Q_{V,opt}$	500	2
DX	1400	3
DX	1000	2
DX	500	1


$\Delta L_{Wrel4}(A)$									
Relative sound power level for inlet side L_{Wrel17} at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
0	1	-4	-8	-4	-8	-9	-12	dB	
1	0	-6	-5	-4	-8	-10	-14	dB	
2	-4	-3	-2	-6	-8	-12	-18	dB	
-3	-2	-6	-9	-3	-8	-9	-12	dB	
-3	-2	-7	-5	-4	-8	-9	-14	dB	
0	-5	-3	-2	-6	-7	-12	-17	dB	
-7	-7	-10	-12	-5	-7	-7	-9	dB	
-7	-8	-11	-9	-5	-7	-7	-10	dB	
-7	-10	-8	-4	-6	-6	-9	-14	dB	

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
7	6	2	-1	-1	-7	-10	-10	dB	
8	5	2	1	-3	-8	-8	-13	dB	
7	4	3	0	-6	-6	-11	-18	dB	
3	3	0	-1	0	-7	-9	-10	dB	
4	2	0	1	-3	-8	-8	-12	dB	
4	2	3	-1	-6	-6	-10	-18	dB	
3	2	-2	-5	-2	-5	-7	-7	dB	
3	0	-3	-3	-2	-6	-7	-9	dB	
1	-2	-2	-2	-5	-6	-8	-14	dB	


ADH E_-0450

Dimensions in mm, subject to change.


ADH E0-0450 42 kg

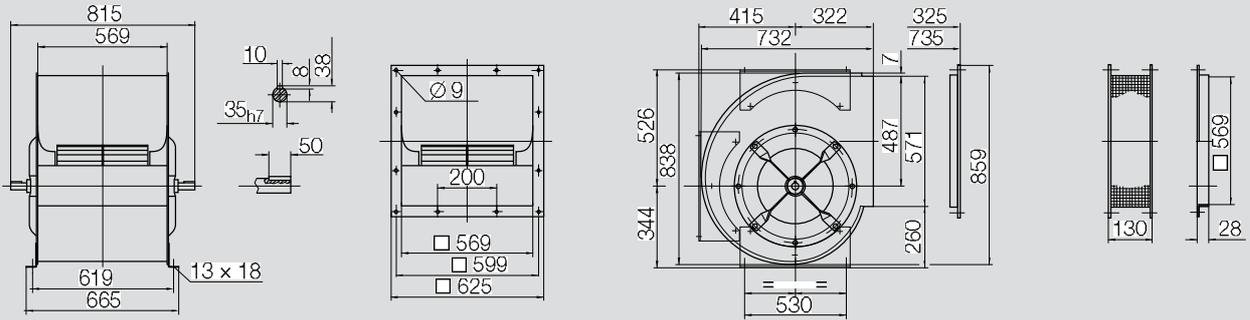


ADH E2-0450 50 kg

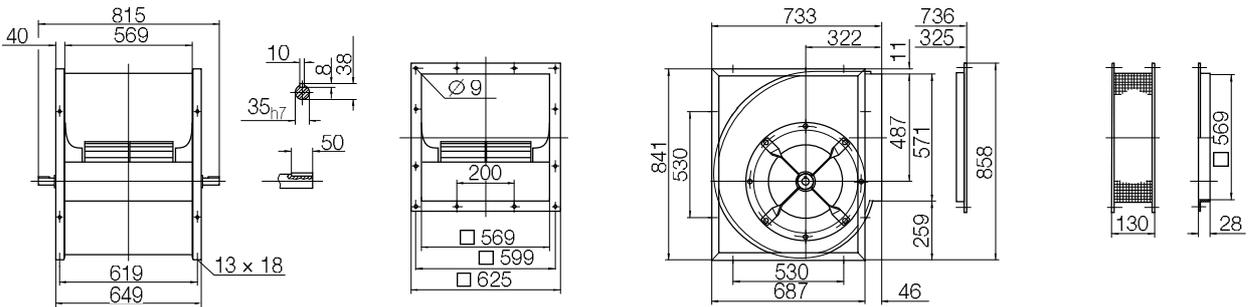

ADH E4-0450 66 kg

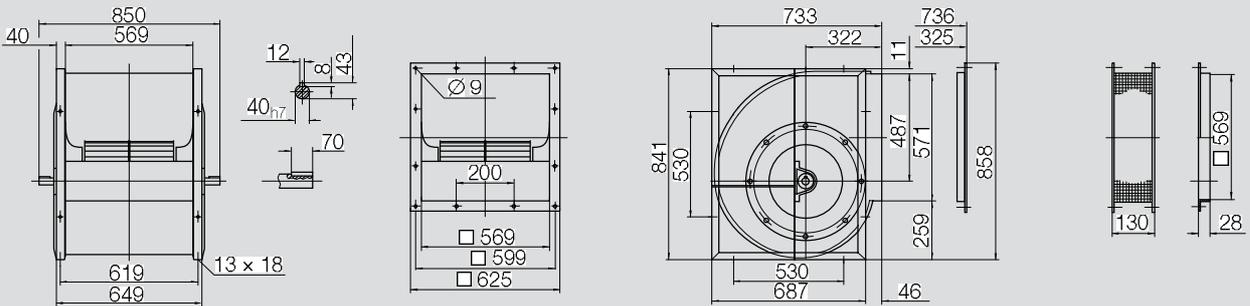

ADH E6-0450 67 kg

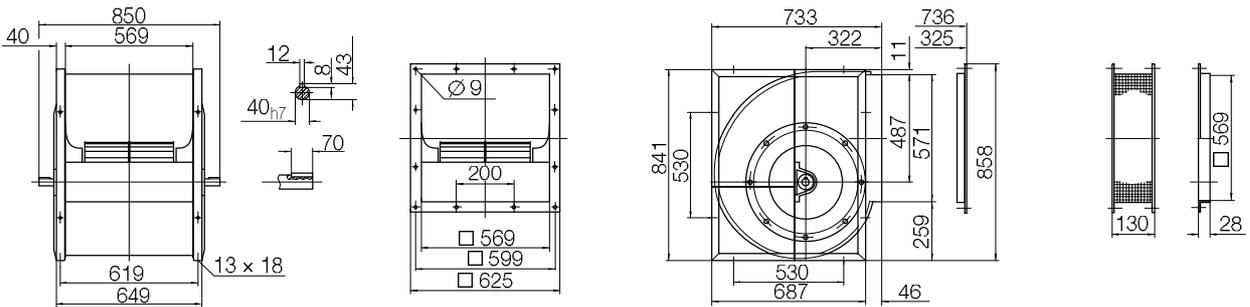

ADH E_-0500

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	500 mm
Number of blades	z	38
Moment of Inertia	J	0.900 kgm ²

Impeller Data

Impeller weight	m	18 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

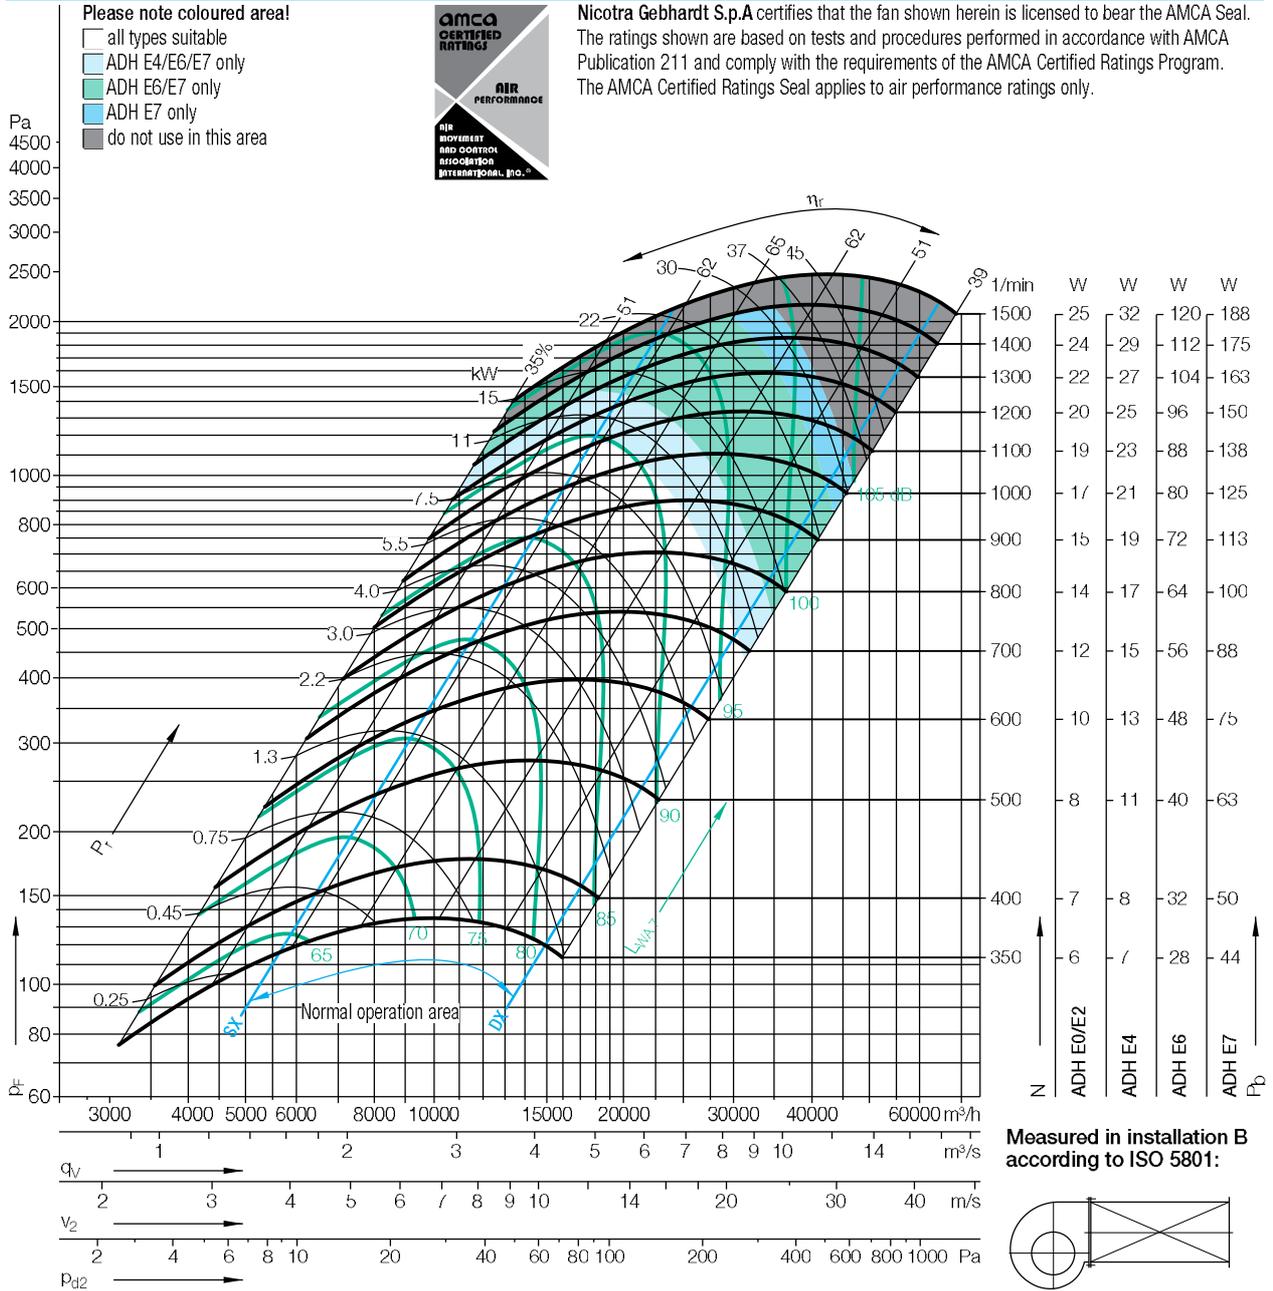

Duty point	Speed 1/min	dB
SX	1300	3
SX	800	2
SX	400	0
$Q_{v,opt}$	1300	3
$Q_{v,opt}$	800	2
$Q_{v,opt}$	400	1
DX	1300	2
DX	800	1
DX	400	0


$\Delta L_{Wrel,d(A)}$									
Relative sound power level for inlet side $L_{Wrel,i}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
3	1	-7	-6	-5	-7	-9	-12	dB	
3	-3	-6	-4	-6	-6	-10	-14	dB	
-1	-4	-2	-4	-4	-8	-12	-17	dB	
-4	-5	-11	-7	-5	-7	-8	-10	dB	
-3	-8	-8	-4	-6	-6	-9	-13	dB	
-6	-7	-2	-5	-4	-7	-11	-18	dB	
-8	-10	-15	-11	-6	-6	-7	-8	dB	
-9	-13	-12	-6	-7	-6	-7	-9	dB	
-12	-11	-5	-6	-5	-6	-8	-14	dB	

Relative sound power level for discharge side $L_{Wrel,d}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
7	4	3	-1	-2	-8	-9	-12	dB	
7	4	0	1	-6	-8	-9	-16	dB	
6	2	3	-4	-6	-7	-14	-20	dB	
1	-1	-1	-2	0	-7	-8	-10	dB	
1	0	-3	2	-5	-7	-8	-14	dB	
2	-1	3	-4	-6	-6	-13	-18	dB	
1	-3	-5	-6	-2	-6	-7	-7	dB	
-1	-4	-7	-2	-5	-8	-7	-9	dB	
-3	-6	-1	-4	-7	-6	-9	-13	dB	


ADH E_-0500

Dimensions in mm, subject to change.


ADH E0-0500 57 kg

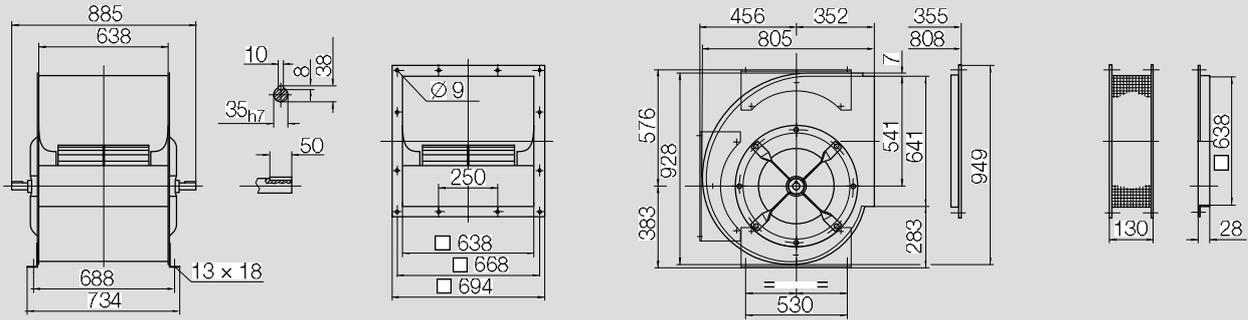


ADH E2-0500 65 kg

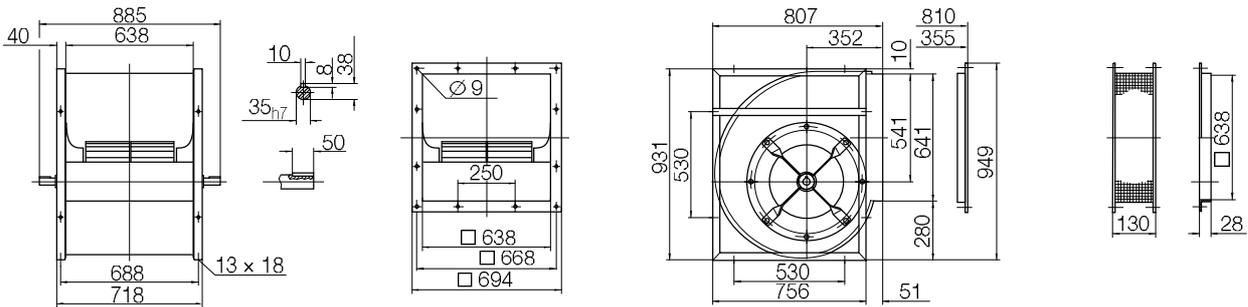


ADH E4-0500 85 kg

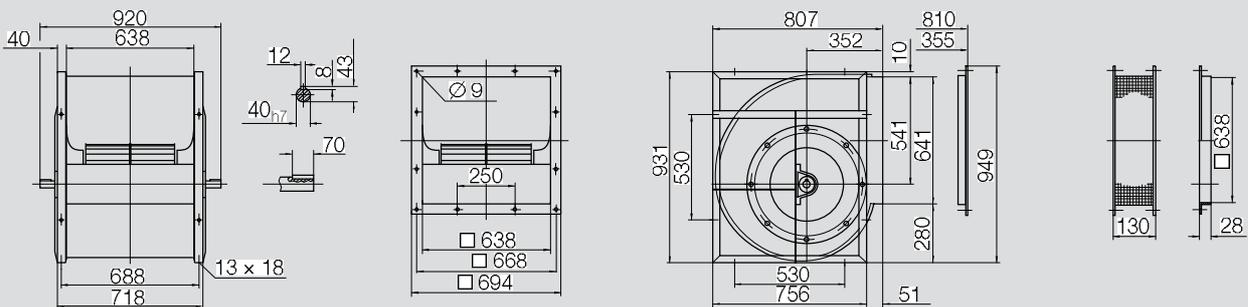

ADH E6-0500 86 kg

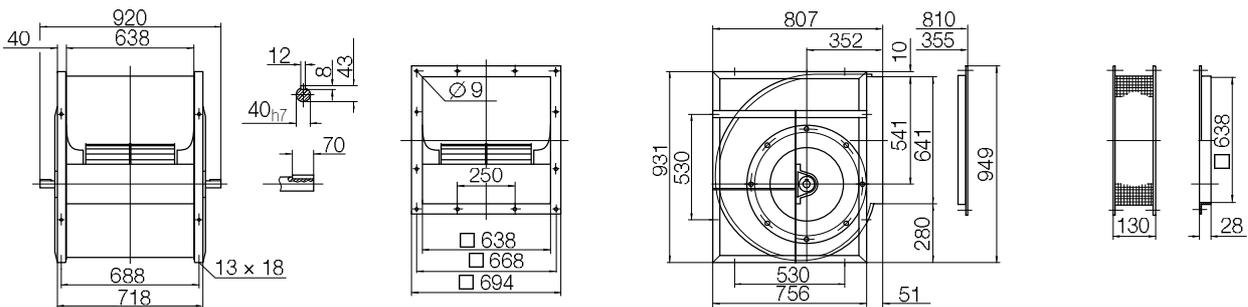

ADH E7-0500 105 kg

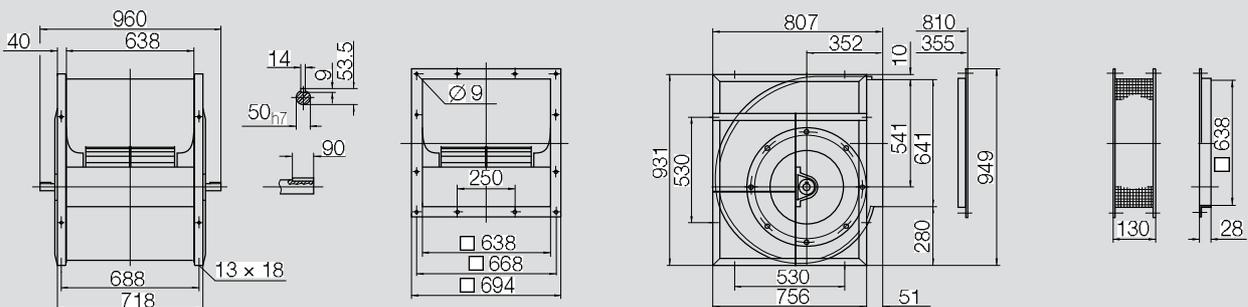

ADH E_-0560

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	560	mm
Number of blades	z	42	
Moment of Inertia	J	1.560	kgm ²

Impeller Data

Impeller weight	m	24	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves

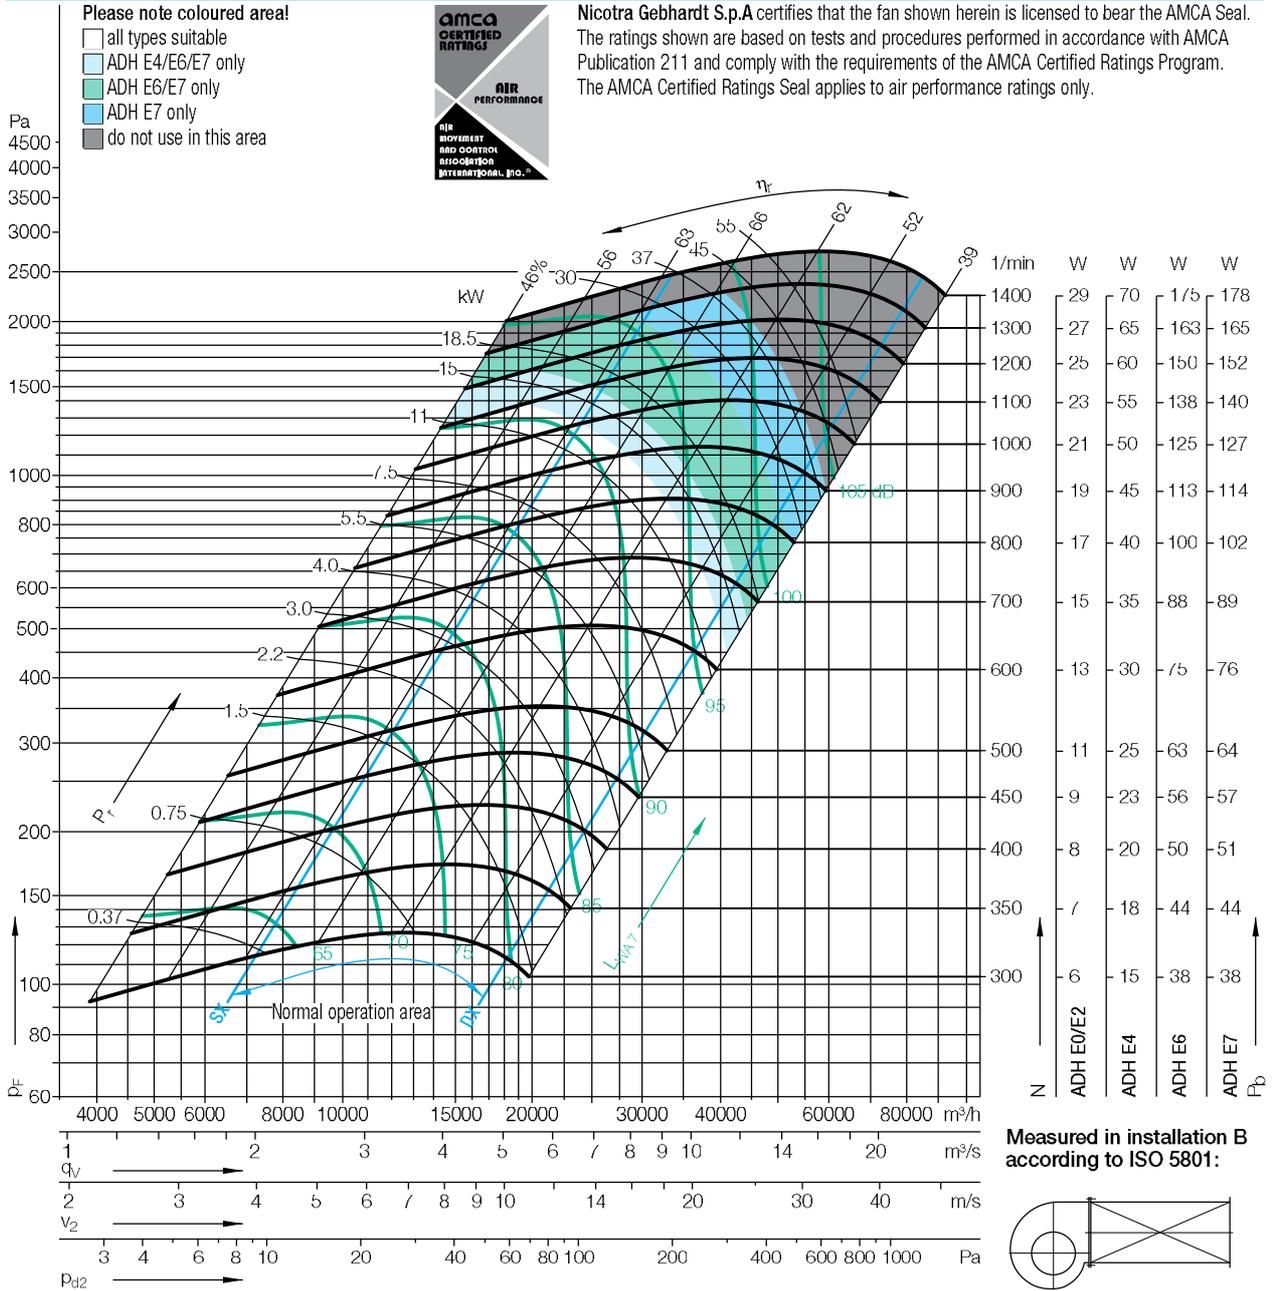

Duty point	Speed 1/min	dB
SX	1200	3
SX	800	2
SX	400	1
$Q_{V,opt}$	1200	3
$Q_{V,opt}$	800	2
$Q_{V,opt}$	400	1
DX	1200	4
DX	800	3
DX	400	1


$\Delta L_{Wrel,d}(A)$									
Relative sound power level for inlet side $L_{Wrel,i7}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
3	3	-2	-8	-5	-8	-8	-11	dB	
4	2	-7	-4	-6	-7	-8	-13	dB	
4	-5	-2	-4	-5	-7	-11	-17	dB	
-1	-1	-5	-9	-4	-8	-8	-10	dB	
0	-1	-9	-4	-6	-7	-8	-12	dB	
0	-8	-2	-5	-5	-6	-11	-17	dB	
-6	-6	-9	-12	-5	-7	-7	-7	dB	
-6	-6	-13	-6	-6	-7	-7	-9	dB	
-5	-12	-5	-5	-6	-6	-8	-15	dB	

Relative sound power level for discharge side $L_{Wrel,d4}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
8	8	2	0	-1	-8	-10	-12	dB	
9	5	2	1	-5	-8	-10	-15	dB	
7	4	3	-3	-6	-8	-13	-20	dB	
6	6	0	-1	0	-7	-9	-10	dB	
7	3	0	2	-5	-8	-9	-13	dB	
5	2	4	-3	-6	-7	-12	-19	dB	
7	7	1	-3	0	-6	-8	-7	dB	
8	3	-1	1	-5	-7	-7	-8	dB	
4	0	2	-4	-6	-6	-7	-10	dB	


ADH E_-0560

Dimensions in mm, subject to change.


ADH E0-0560 72 kg

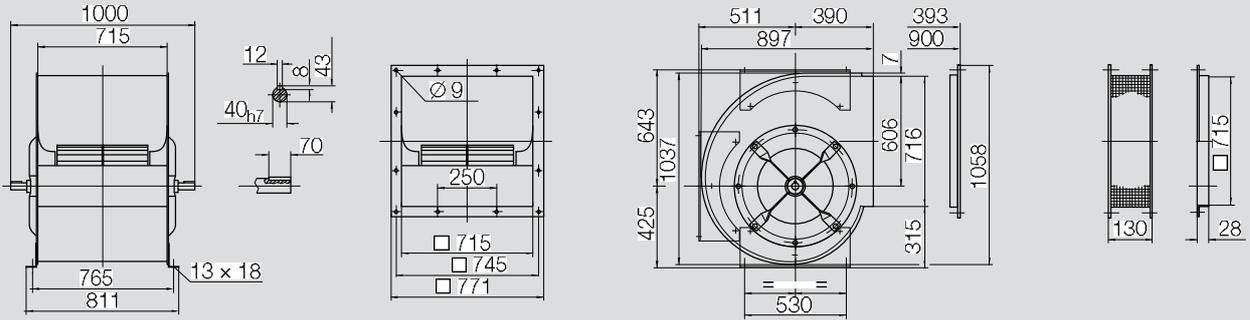


ADH E2-0560 86 kg

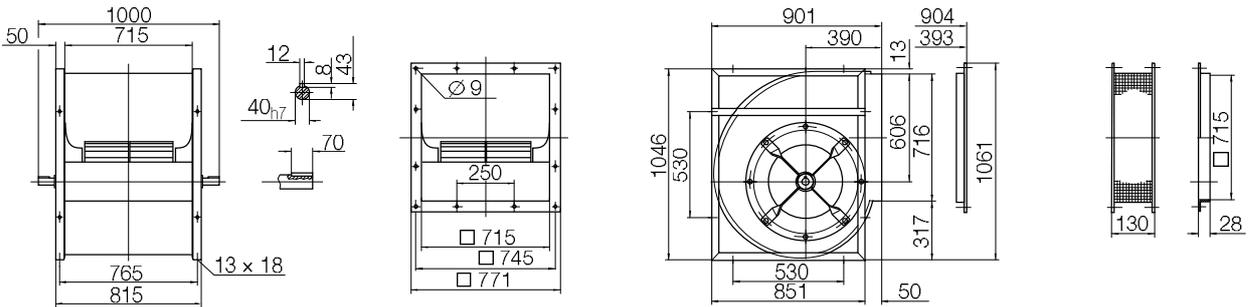


ADH E4-0560 134 kg

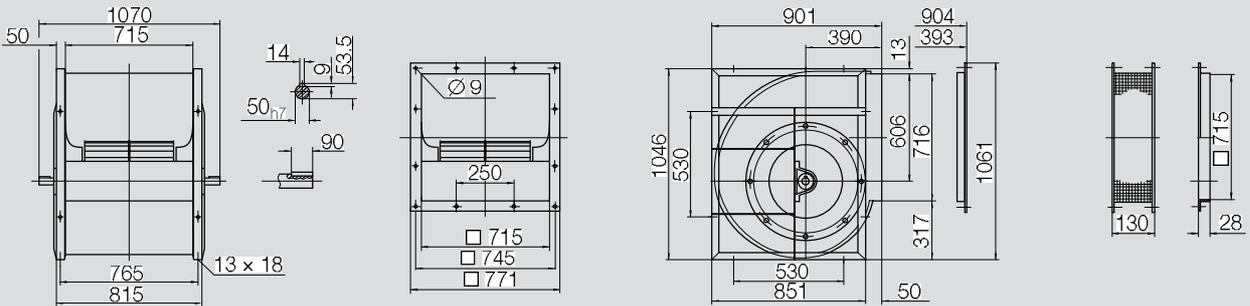

ADH E6-0560 142 kg

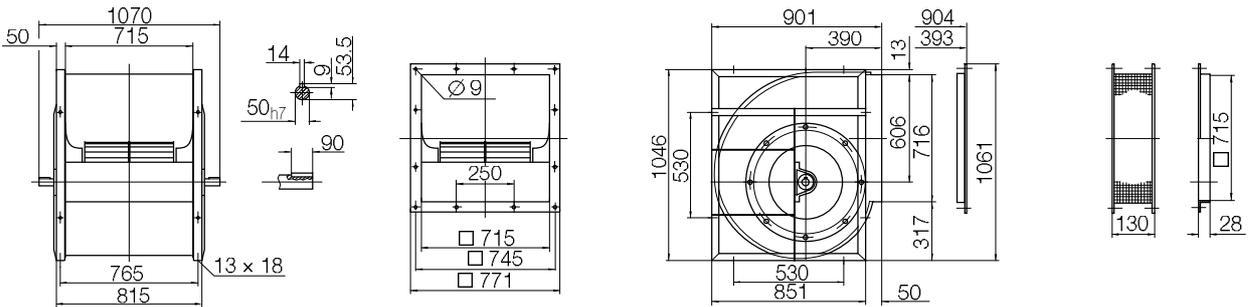

ADH E7-0560 150 kg

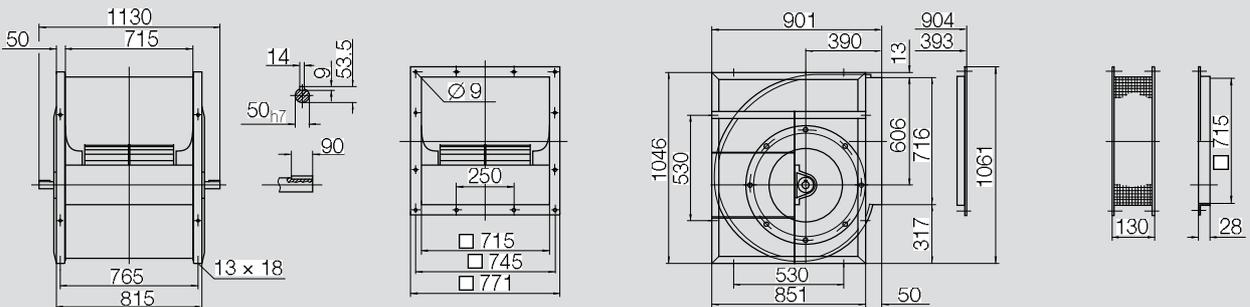

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	632	mm
Number of blades	z	38	
Moment of Inertia	J	2.590	kgm ²

Impeller Data

Impeller weight	m	32	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves

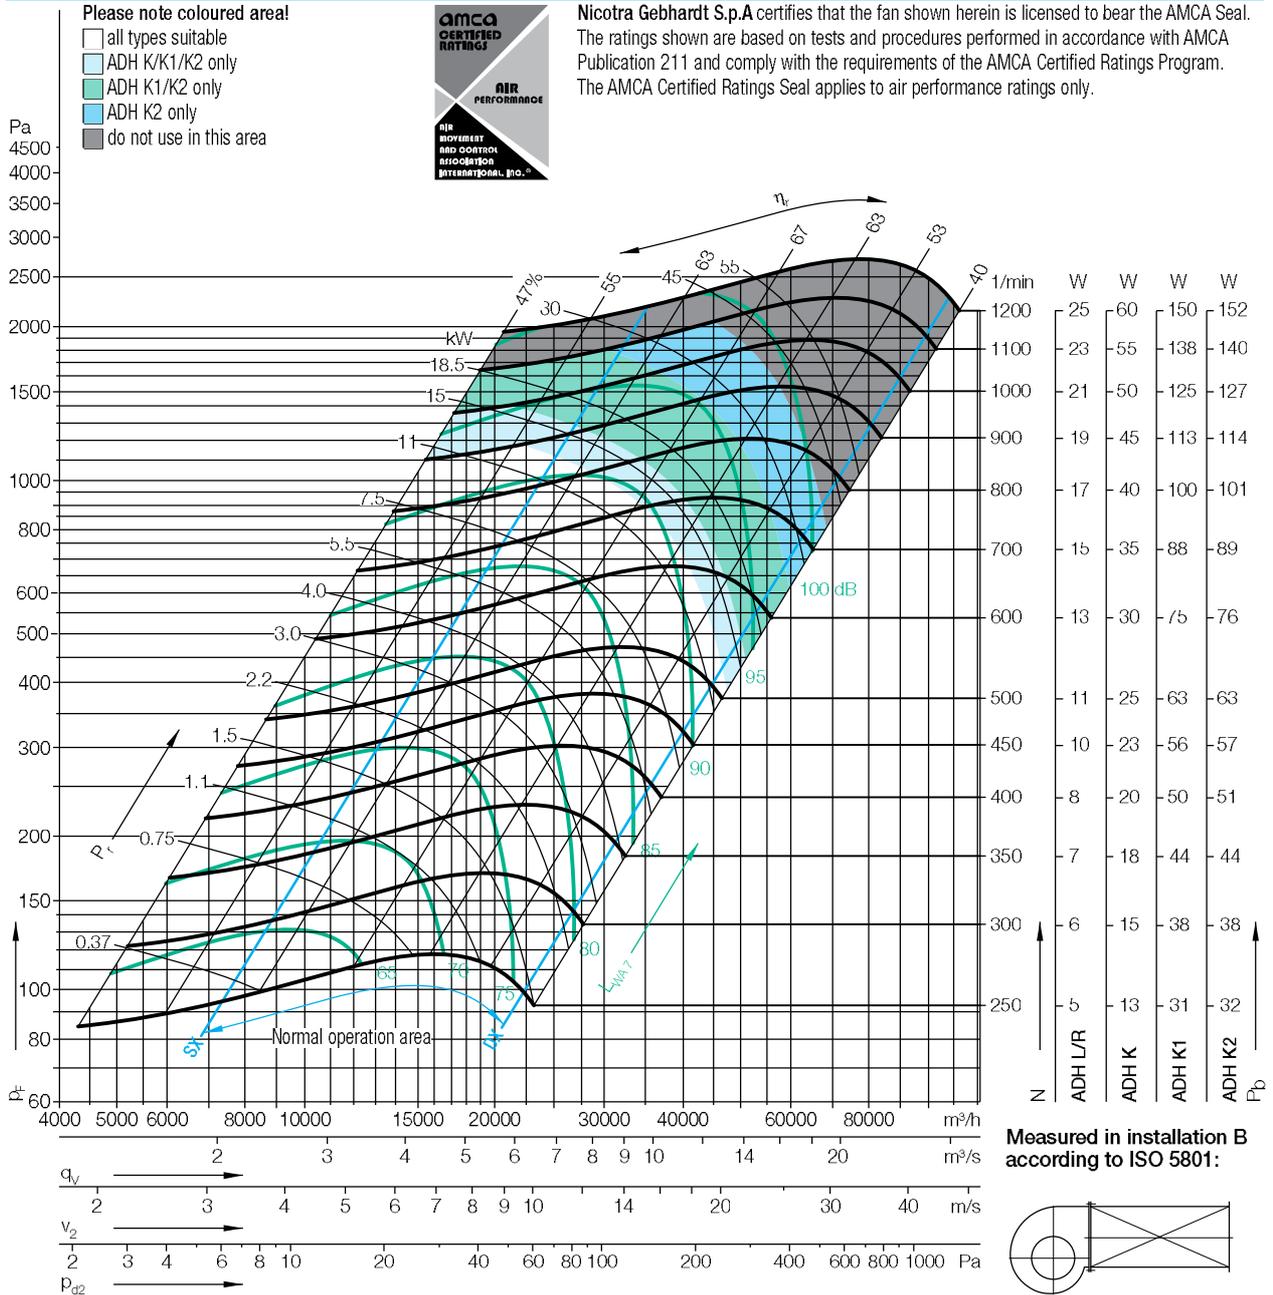

Duty point	Speed 1/min	dB
SX	1000	3
SX	600	2
SX	350	1
$Q_{V,opt}$	1000	2
$Q_{V,opt}$	600	1
$Q_{V,opt}$	350	1
DX	1000	2
DX	600	1
DX	350	1


Relative sound power level for inlet side L_{Wrel7} at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
2	2	3	-3	-7	-9	-12	-17	dB	
4	5	2	-4	-6	-9	-13	-20	dB	
7	6	0	-3	-5	-9	-16	-22	dB	
1	1	1	-3	-6	-8	-11	-17	dB	
3	4	1	-3	-6	-9	-13	-20	dB	
6	4	1	-2	-6	-9	-16	-22	dB	
3	3	0	-5	-6	-8	-10	-12	dB	
4	4	-3	-4	-6	-8	-9	-16	dB	
6	1	-2	-3	-6	-7	-13	-19	dB	

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
10	10	7	-1	-7	-9	-12	-17	dB	
12	11	4	-3	-6	-9	-13	-20	dB	
14	9	1	-3	-5	-9	-16	-22	dB	
9	9	6	-1	-6	-8	-11	-17	dB	
11	9	3	-2	-5	-9	-13	-20	dB	
12	7	2	-2	-6	-9	-16	-22	dB	
11	11	5	-3	-6	-8	-10	-12	dB	
12	10	0	-3	-5	-8	-9	-15	dB	
13	2	-1	-3	-6	-7	-13	-19	dB	


ADH_-0630

Dimensions in mm, subject to change.


ADH L-0630 91 kg

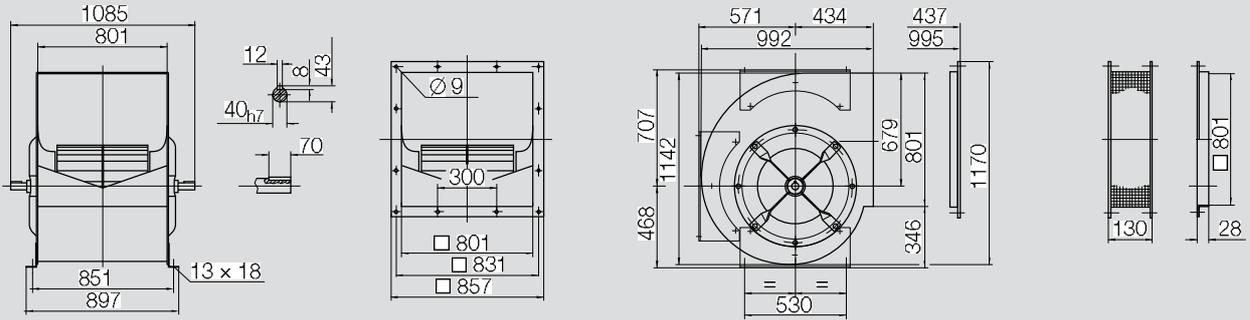


ADH R-0630 106 kg

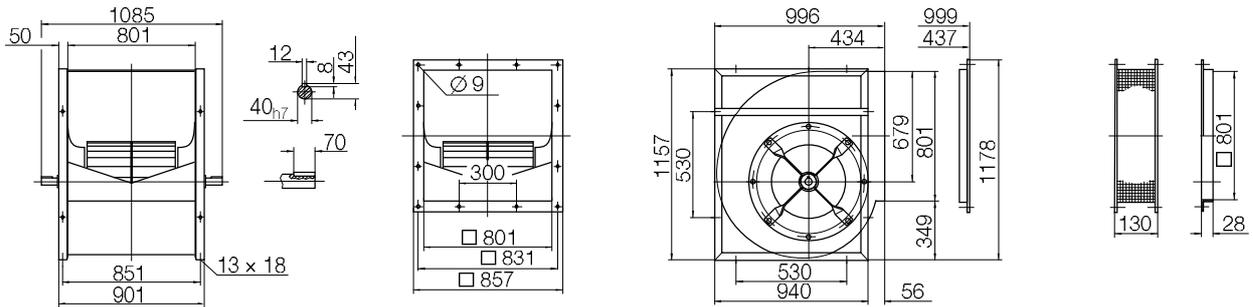


ADH K-0630 170 kg

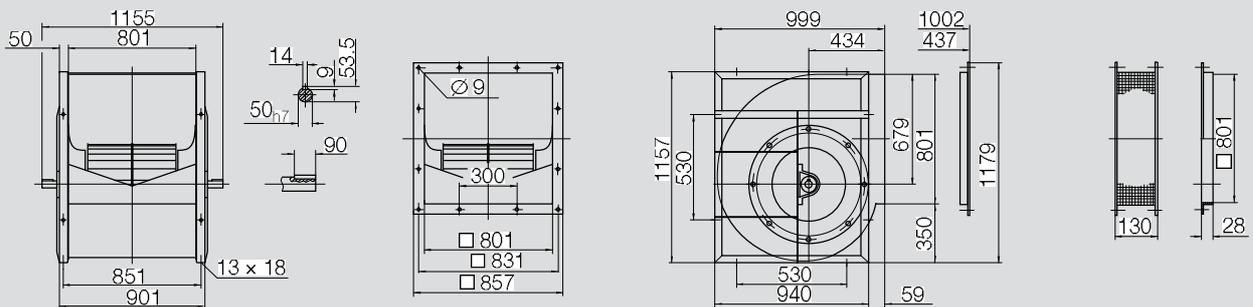

ADH K1-0630 175 kg

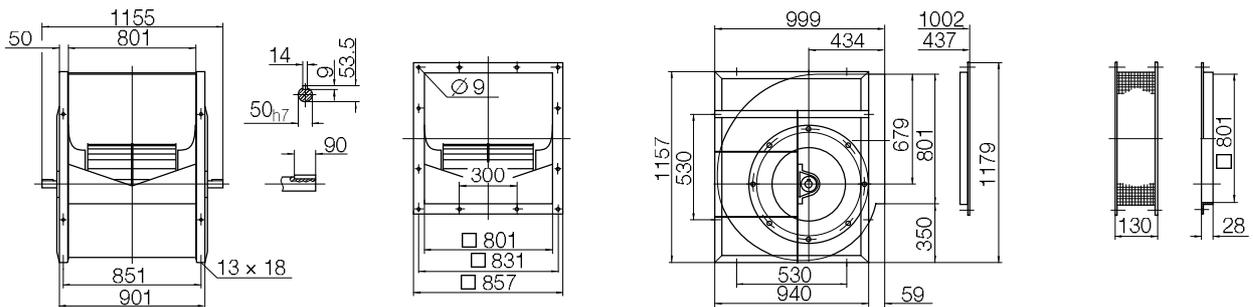

ADH K2-0630 180 kg

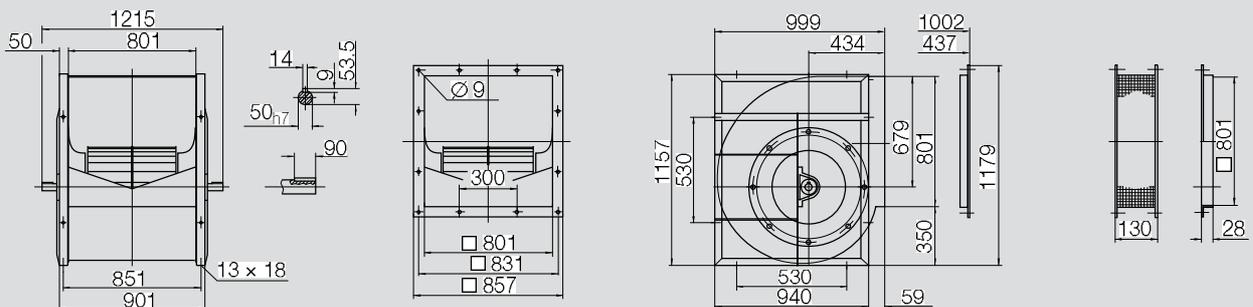

ADH_-0710

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	712	mm
Number of blades	z	42	
Moment of Inertia	J	3.970	kgm ²

Impeller Data

Impeller weight	m	40	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves

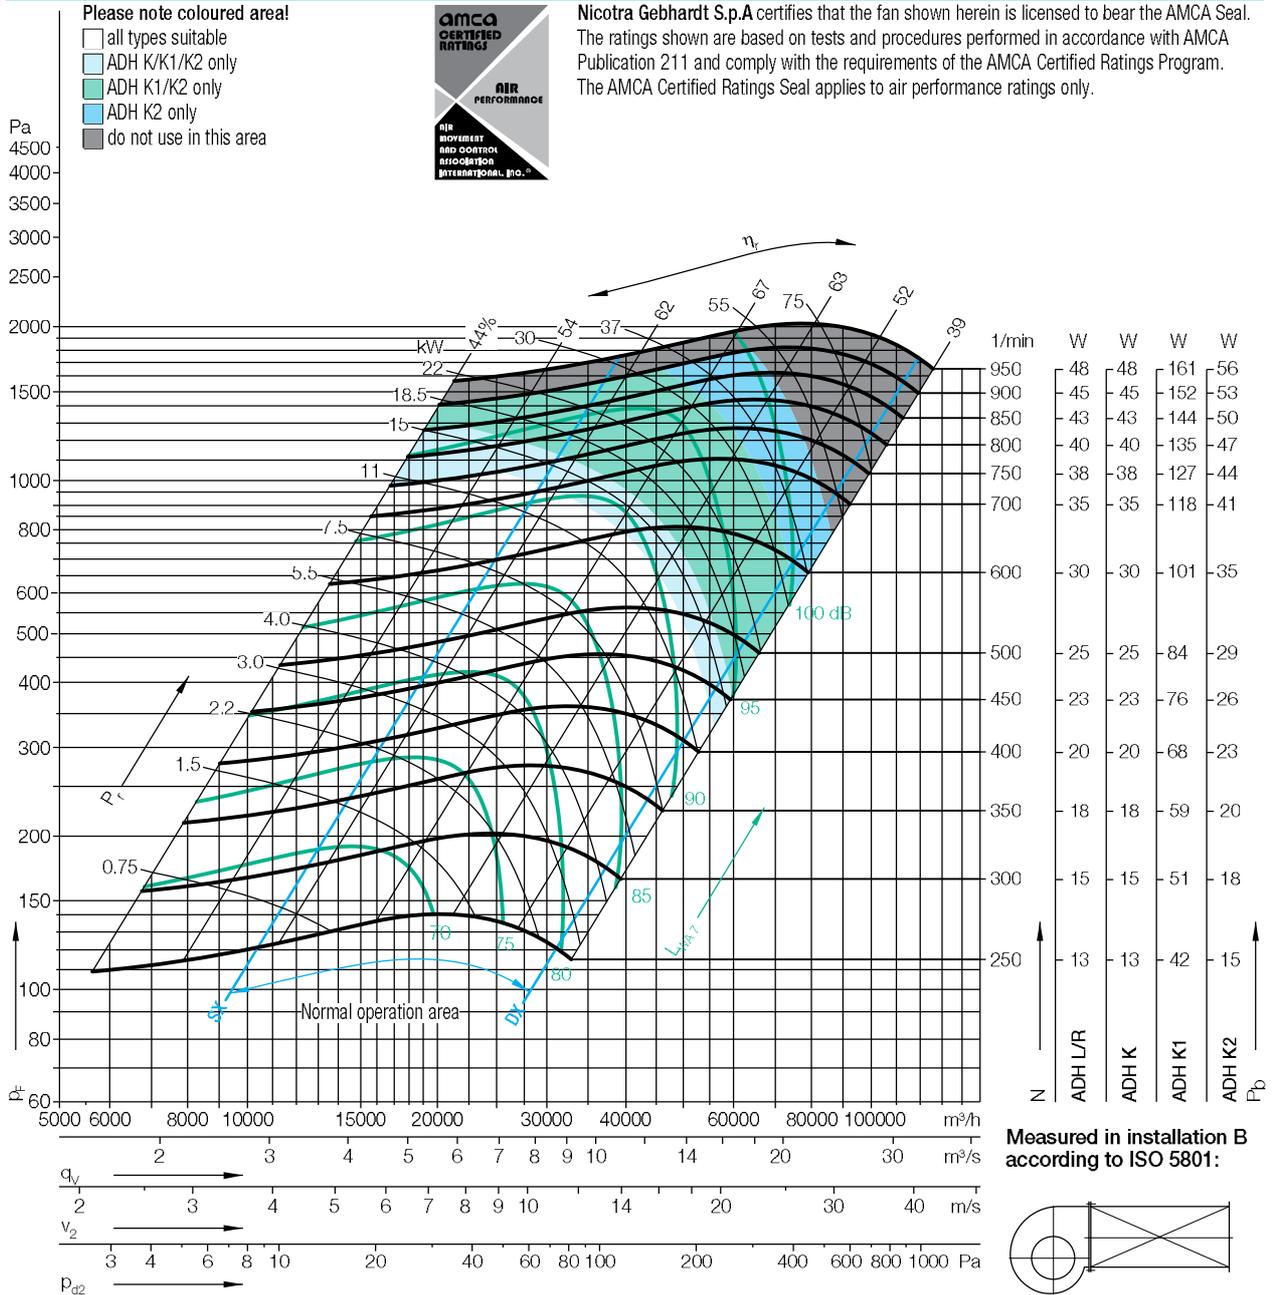

Duty point	Speed 1/min	dB
SX	850	2
SX	500	1
SX	300	1
$Q_{V,opt}$	850	2
$Q_{V,opt}$	500	1
$Q_{V,opt}$	300	0
DX	850	2
DX	500	1
DX	300	0

Relative sound power level for inlet side L_{WrelI} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
4	6	0	-1	-8	-10	-14	-20		dB
7	6	2	-3	-8	-10	-15	-21		dB
11	6	3	-4	-6	-11	-17	-20		dB
3	4	-2	-1	-7	-10	-13	-19		dB
6	4	2	-2	-7	-9	-15	-20		dB
9	4	3	-4	-6	-11	-16	-20		dB
7	6	-4	-3	-7	-8	-10	-14		dB
9	0	-2	-3	-6	-7	-10	-17		dB
6	1	0	-4	-5	-7	-14	-18		dB


Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
12	12	2	0	-7	-10	-14	-20		dB
14	10	3	-2	-7	-10	-15	-21		dB
15	7	3	-4	-6	-11	-17	-20		dB
10	10	1	0	-7	-10	-13	-19		dB
13	7	3	-1	-7	-9	-15	-20		dB
13	6	4	-4	-6	-11	-16	-20		dB
14	12	-1	-2	-7	-8	-10	-14		dB
16	4	0	-3	-6	-7	-10	-17		dB
10	2	0	-4	-5	-7	-14	-18		dB


ADH_-0710

Dimensions in mm, subject to change.


ADH L-0710 118 kg

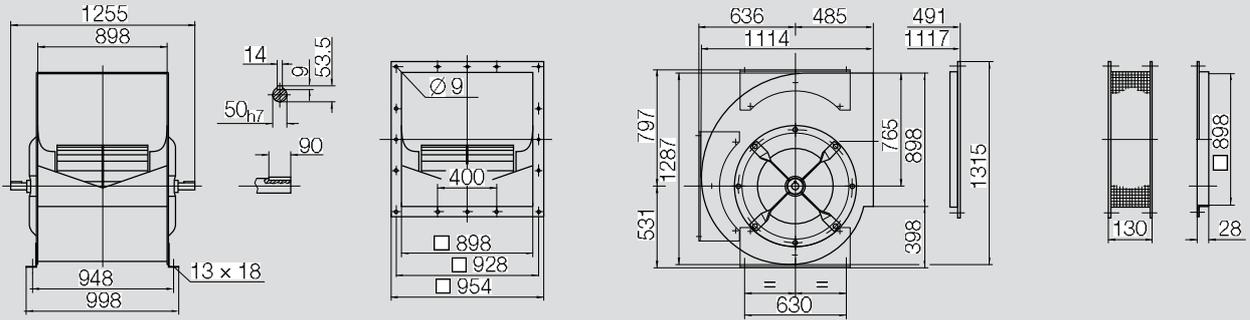


ADH R-0710 135 kg

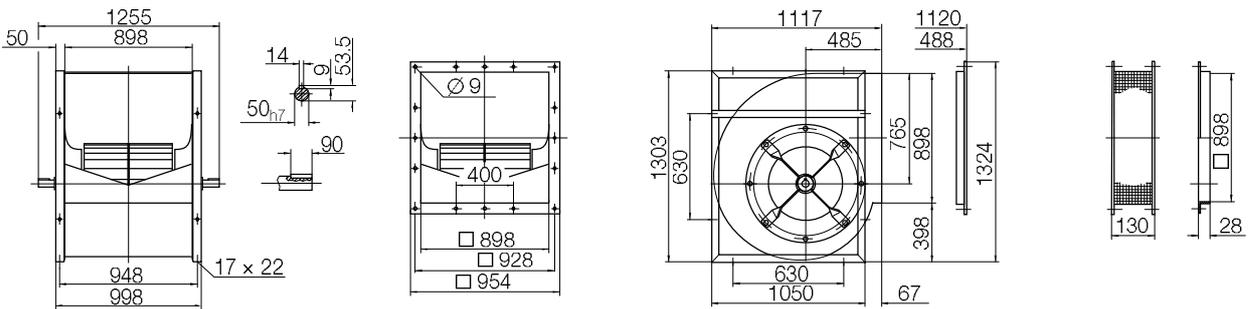


ADH K-0710 201 kg

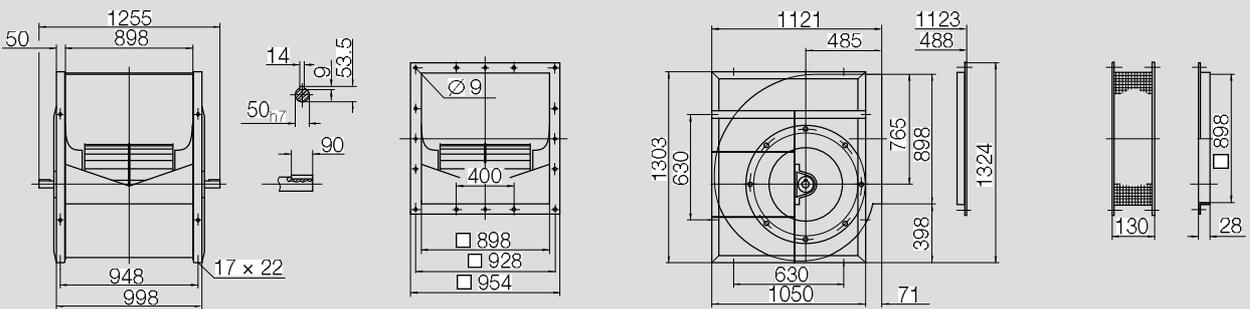

ADH K1-0710 208 kg

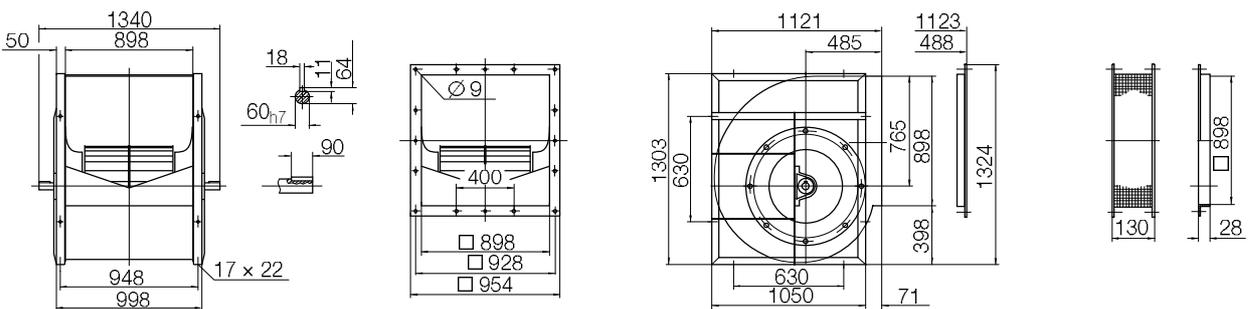

ADH K2-0710 225 kg

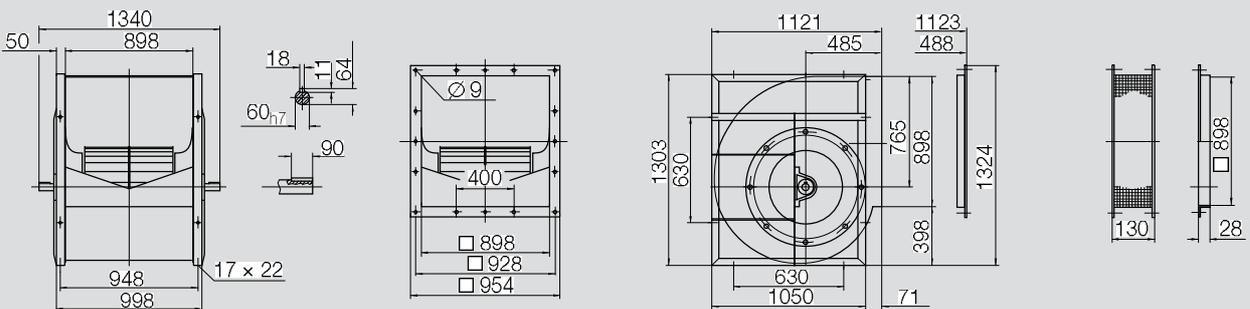

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	809	mm
Number of blades	z	38	
Moment of Inertia	J	8.340	kgm ²

Impeller Data

Impeller weight	m	63	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves

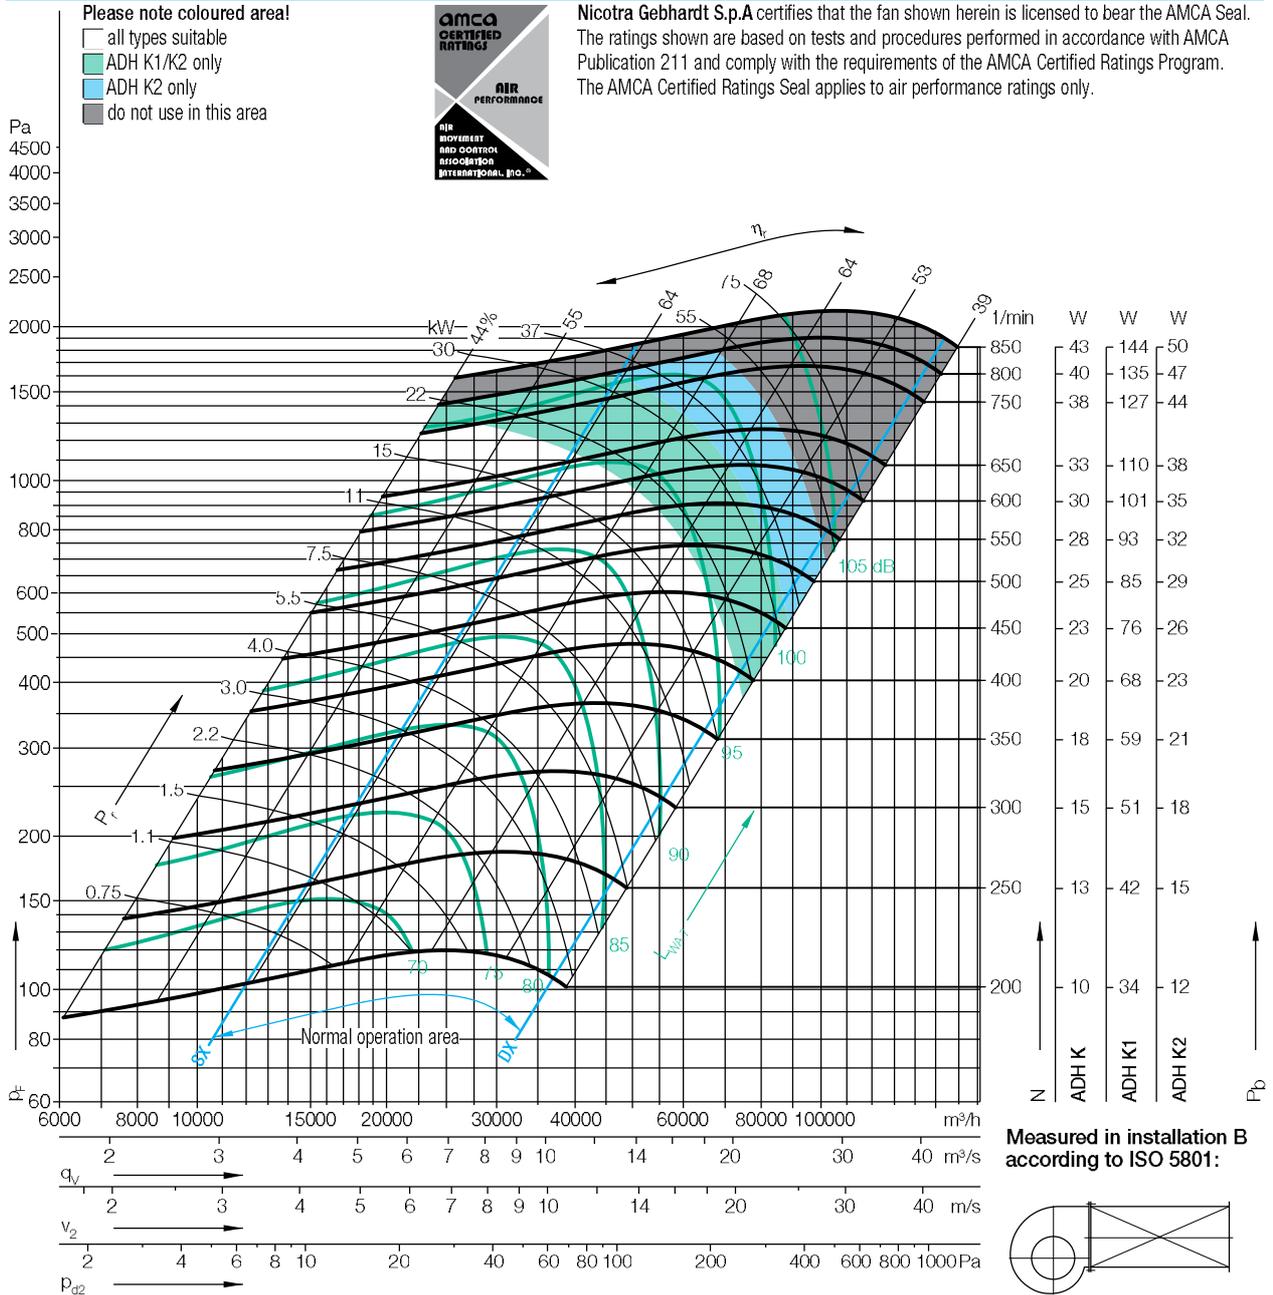

Duty point	Speed 1/min	dB
SX	750	2
SX	500	1
SX	300	1
$Q_{V,opt}$	750	1
$Q_{V,opt}$	500	1
$Q_{V,opt}$	300	1
DX	750	2
DX	500	1
DX	300	0

Relative sound power level for inlet side L_{Wrel7} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
63	5	7	-1	-1	-8	-10	-15	-20	dB
75	7	6	2	-3	-8	-10	-16	-21	dB
110	11	6	2	-4	-6	-11	-17	-20	dB
150	3	5	-2	-0	-8	-10	-14	-19	dB
200	6	4	2	-2	-7	-9	-15	-20	dB
280	9	4	3	-4	-6	-10	-16	-20	dB
380	7	5	-4	-3	-7	-8	-10	-15	dB
500	9	0	-2	-3	-6	-7	-11	-17	dB
680	6	1	-0	-4	-5	-7	-14	-19	dB


Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

	63	125	250	500	1000	2000	4000	8000	Hz
12	12	1	0	-8	-10	-15	-20	dB	
15	15	10	3	-2	-7	-10	-16	-21	dB
16	16	7	3	-4	-6	-11	-17	-20	dB
11	11	10	0	0	-8	-10	-14	-19	dB
13	13	7	3	-1	-7	-9	-15	-20	dB
13	13	6	4	-4	-6	-10	-16	-20	dB
14	14	11	-2	-2	-7	-8	-10	-15	dB
16	16	4	-1	-3	-6	-7	-11	-17	dB
10	10	2	0	-4	-5	-7	-14	-19	dB


ADH_-0800

Dimensions in mm, subject to change.


ADH K-0800 249 kg

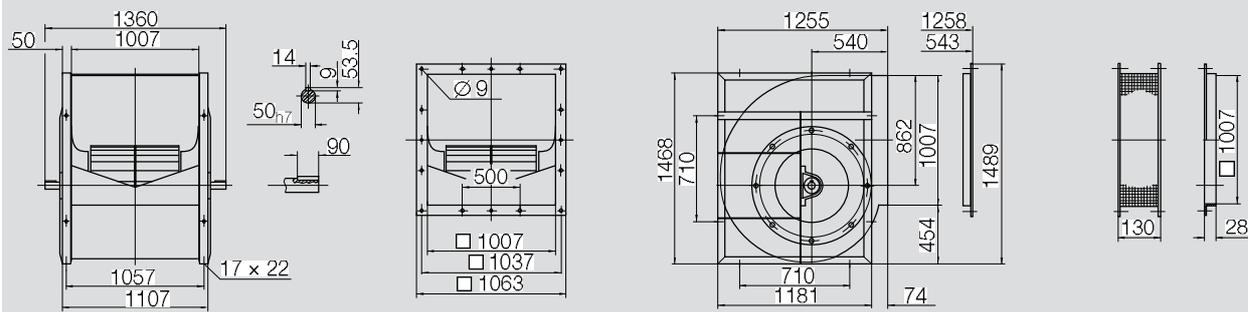

ADH K1-0800 261 kg

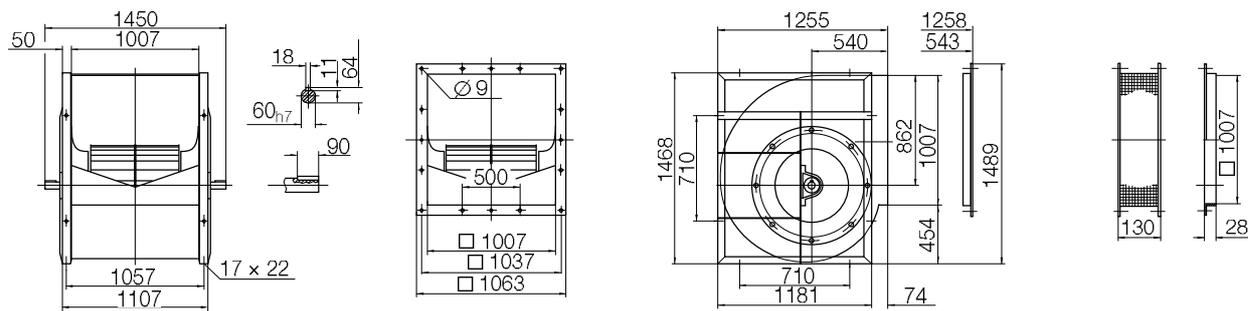

ADH K2-0800 278 kg

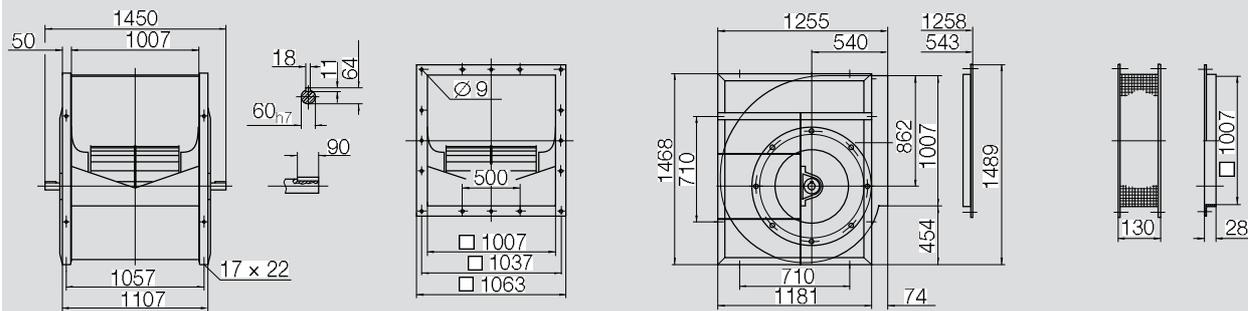

ADH_-0900

Performance certified is for installation type B - free inlet, ducted outlet.
 Power rating (kW) does not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	905 mm
Number of blades	z	42
Moment of Inertia	J	12.60 kgm ²

Impeller Data

Impeller weight	m	73 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

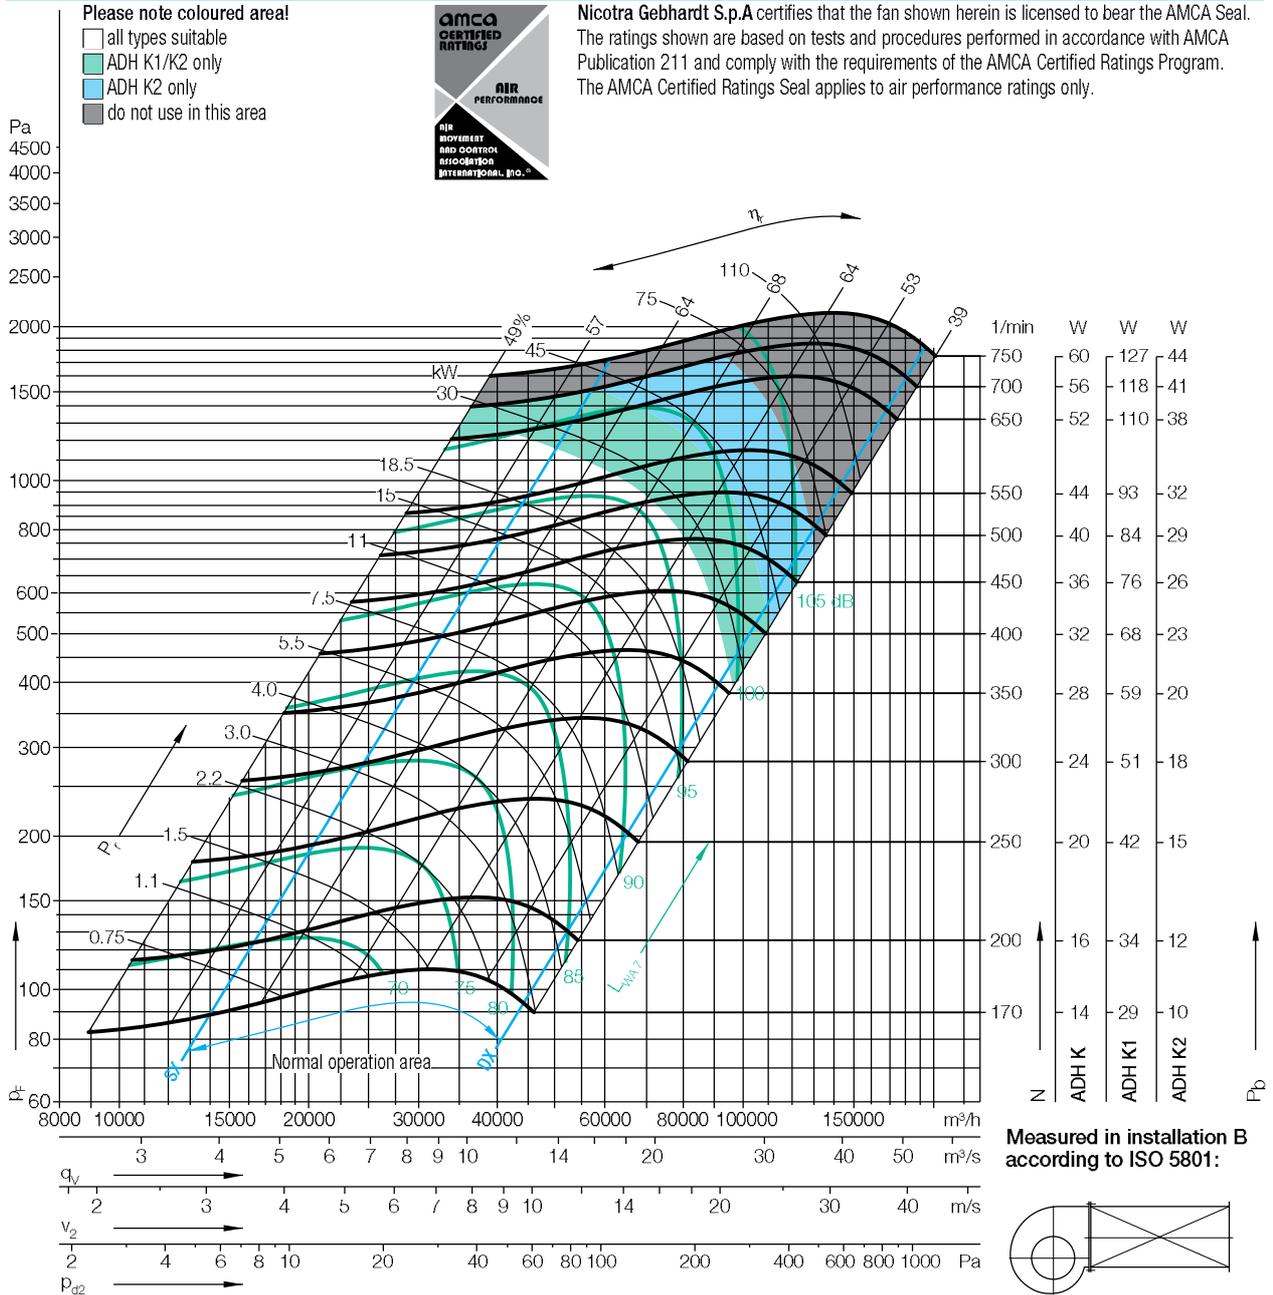

Duty point	Speed 1/min	$\Delta L_{Wrel,d}(A)$
SX	650	2
SX	400	1
SX	250	0
$Q_{V,opt}$	650	1
$Q_{V,opt}$	400	1
$Q_{V,opt}$	250	0
DX	650	1
DX	400	1
DX	250	0


Relative sound power level for inlet side $L_{Wrel,i}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
6	7	1	-2	-8	-10	-15	-21	dB	
11	3	4	-4	-6	-11	-16	-20	dB	
11	6	2	-3	-6	-11	-17	-21	dB	
4	5	0	-1	-8	-10	-14	-20	dB	
8	1	4	-4	-6	-10	-15	-20	dB	
8	6	2	-4	-6	-11	-17	-21	dB	
8	5	-2	-3	-7	-7	-10	-16	dB	
8	-2	0	-5	-5	-7	-12	-18	dB	
3	1	-1	-4	-5	-8	-14	-19	dB	

Relative sound power level for discharge side $L_{Wrel,d}$ at octave centre frequencies f_c									
63	125	250	500	1000	2000	4000	8000	Hz	
13	12	3	-1	-8	-10	-15	-21	dB	
17	5	4	-4	-6	-11	-16	-20	dB	
14	8	2	-3	-6	-11	-17	-21	dB	
11	10	1	0	-8	-10	-14	-20	dB	
14	4	4	-4	-6	-10	-15	-20	dB	
11	7	3	-3	-6	-11	-17	-21	dB	
15	9	-1	-2	-7	-7	-10	-16	dB	
14	1	1	-4	-5	-7	-12	-18	dB	
6	2	0	-4	-5	-8	-14	-19	dB	


ADH _-0900

Dimensions in mm, subject to change.


ADH K-0900 306 kg

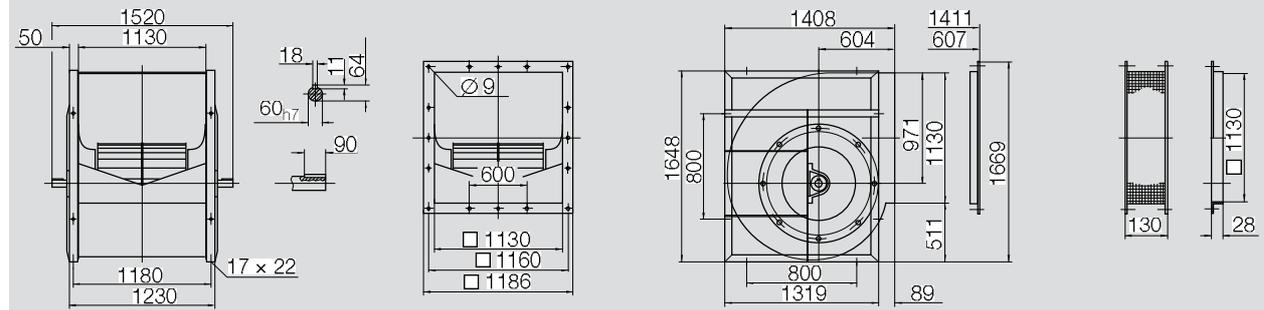

ADH K1-0900 316 kg

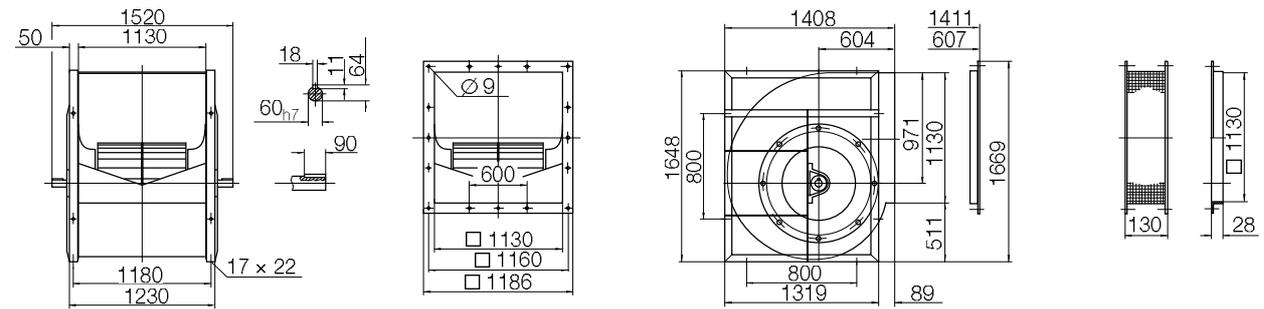

ADH K2-0900 320 kg

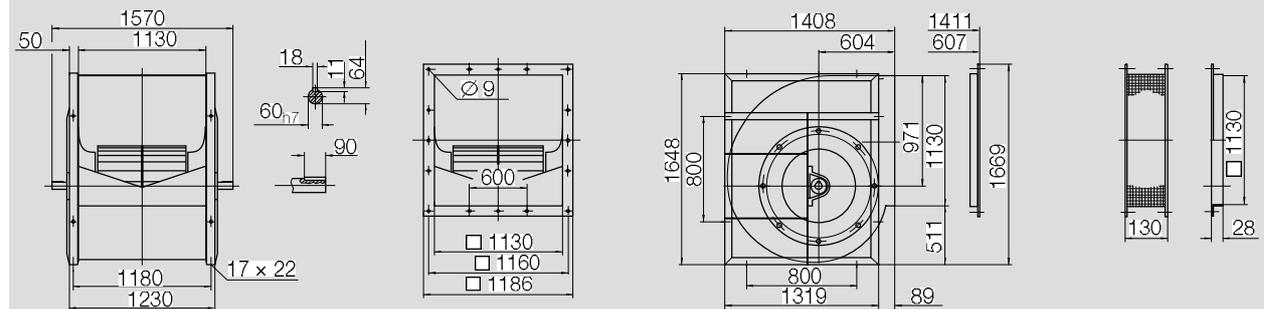

ADH_-1000

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data


Impeller Data

Impeller diameter	D_f	995 mm
Number of blades	z	46
Moment of Inertia	J	18.70 kgm ²

Impeller Data

Impeller weight	m	89 kg
Density of media	ρ_1	1.2 kg/m ³
Tolerance class (DIN 24166)		2

Performance Curves

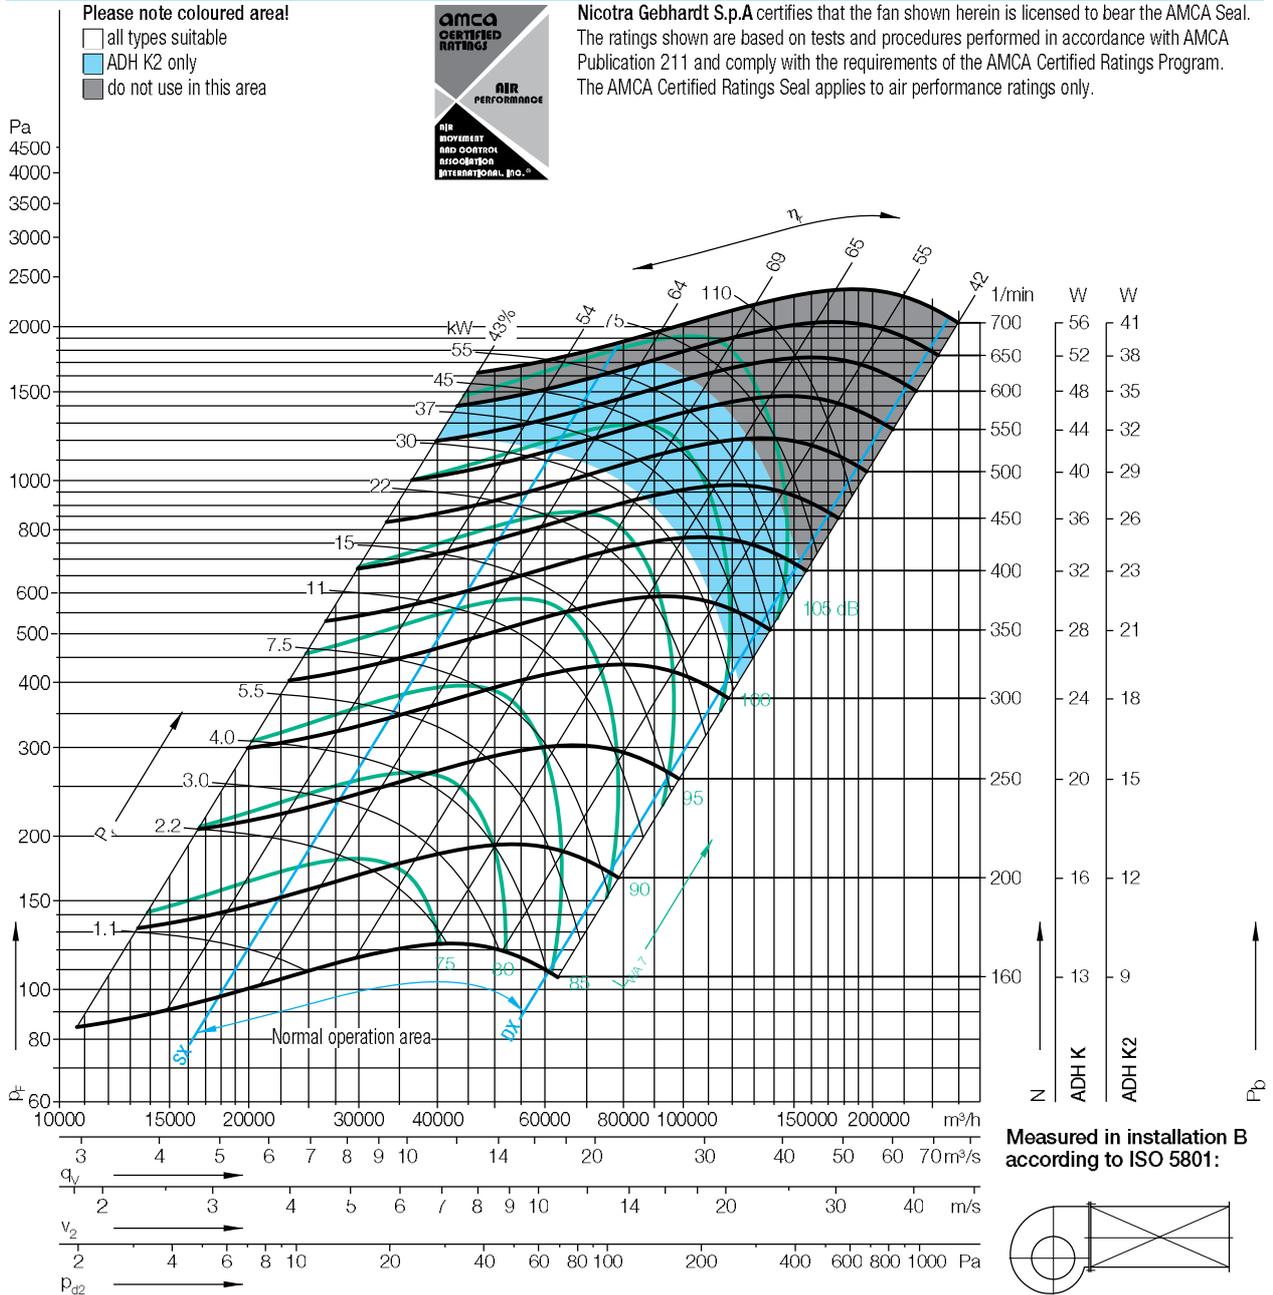

$\Delta L_{Wrel4}(A)$

Relative sound power level for inlet side L_{Wrel17} at octave centre frequencies f_c

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

Duty point	Speed 1/min	dB
SX	600	2
SX	400	1
SX	200	0
$Q_{V,opt}$	600	1
$Q_{V,opt}$	400	1
$Q_{V,opt}$	200	0
DX	600	1
DX	400	1
DX	200	0


	63	125	250	500	1000	2000	4000	8000	Hz
7	7	1	-2	-8	-10	-15	-21		dB
11	3	4	-4	-6	-11	-16	-20		dB
7	8	0	-2	-6	-12	-16	-22		dB
5	5	0	-1	-8	-10	-15	-20		dB
8	1	4	-4	-6	-10	-15	-20		dB
5	8	0	-2	-6	-11	-16	-22		dB
8	4	-2	-3	-7	-7	-10	-17		dB
8	-2	0	-5	-5	-7	-12	-18		dB
1	3	-2	-2	-5	-9	-15	-20		dB

	63	125	250	500	1000	2000	4000	8000	Hz
14	12	3	-2	-8	-10	-15	-21		dB
17	5	4	-4	-6	-10	-16	-20		dB
9	8	0	-2	-6	-12	-16	-22		dB
12	9	2	-1	-8	-10	-15	-20		dB
14	4	4	-4	-6	-10	-15	-20		dB
8	8	0	-2	-6	-11	-16	-22		dB
15	8	0	-3	-7	-7	-10	-17		dB
14	1	1	-4	-5	-7	-12	-18		dB
3	4	-2	-2	-5	-9	-15	-20		dB


ADH_-1000

Dimensions in mm, subject to change.


ADH K-1000 333 kg

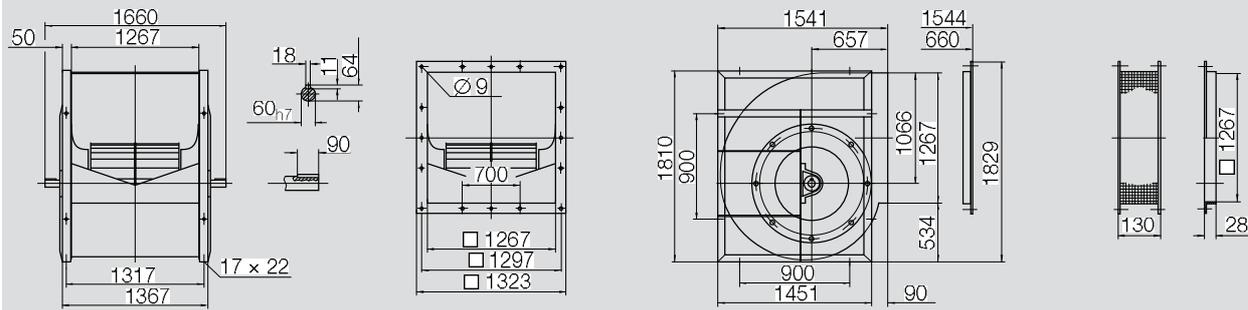

ADH K1-1000 356 kg

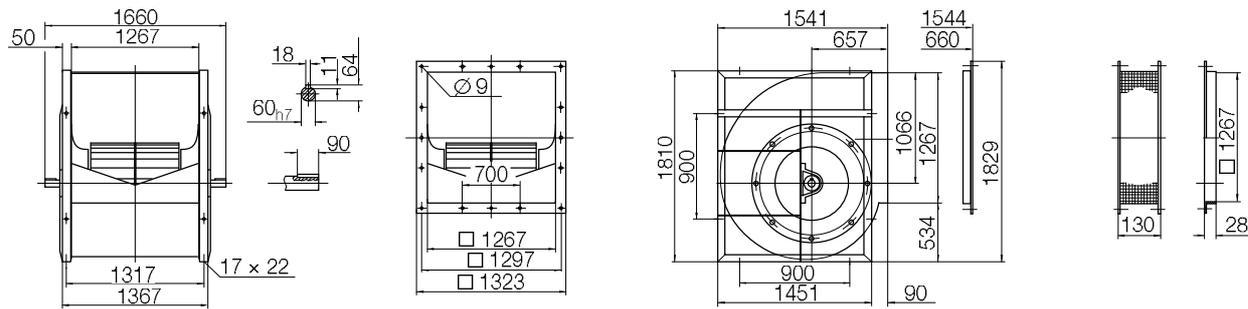


ADH K2-1000 360 kg

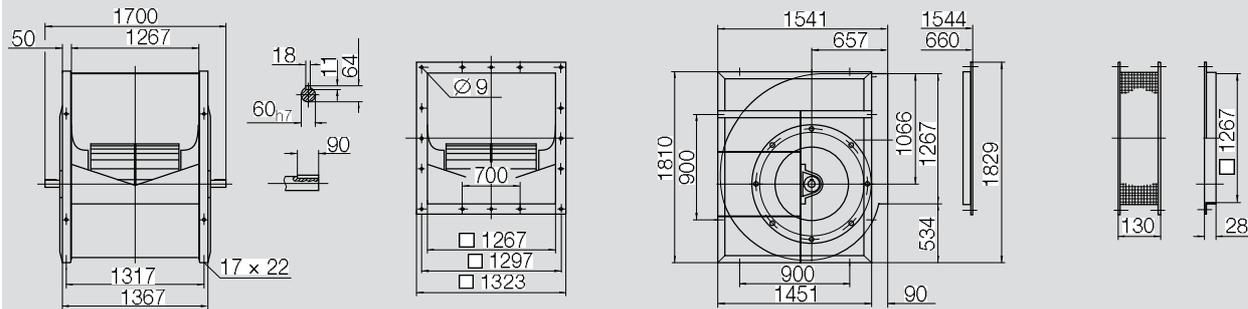


ADH G2E0

Dimensions in mm, subject to change.


ADH G2E0-0160/-0500

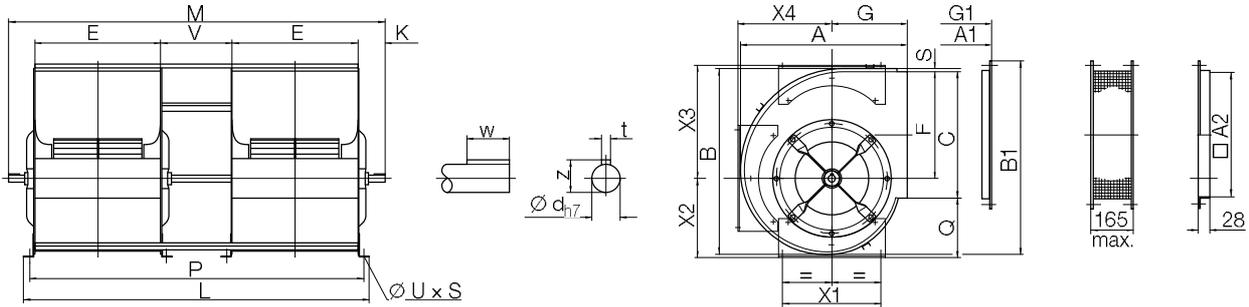

ADH G2E0-0160/-0355



ADH G2E0-0400/-0500



ADH G2E0-0160/-0500

	A	B	C	E	F	G	L	M	P	Q
0160	290	310	205	205	173	141	630	710	600	121
0180	319	344	227	229	195	154	698	780	668	135
0200	348	378	258	256	216	163	772	876	742	144
0225	388	422	287	288	241	182	861	965	831	156
0250	423	467	322	322	268	195	954	1036	924	161
0280	471	524	361	361	302	215	1062	1160	1032	183
0315	522	586	403	404	338	236	1183	1301	1153	202
0355	582	658	450	453	381	261	1341	1451	1301	212
0400	654	745	507	507	432	290	1494	1606	1454	234
0450	732	838	571	569	487	322	1684	1790	1638	260
0500	805	928	641	638	541	352	1872	1986	1826	283


	S	V	K	X1	X2	X3	X4	t	w
0160	7	160	70	180	153	207	153	6	30
0180	7	180	71	180	167	227	167	6	30
0200	6	200	82	224	186	250	189	6	30
0225	7	225	82	224	202	279	209	6	30
0250	7	250	71	224	215	304	232	6	30
0280	6	280	79	280	242	337	261	8	40
0315	7	315	89	280	267	376	289	8	40
0355	7	355	95	355	281	418	327	8	40
0400	7	400	96	355	309	469	366	8	40
0450	7	450	101	530	344	526	415	10	50
0500	7	500	105	530	383	576	456	10	50

	z	ød	u x s	A1	B1	G1	A2	B2	C2	E2
0160	22.5	20h7	11 x 16	293	331	144	205	261	117.5	-
0180	22.5	20h7	11 x 16	322	365	157	229	285	129.5	-
0200	22.5	20h7	11 x 16	351	400	166	256	312	143	-
0225	22.5	20h7	11 x 16	391	443	185	288	344	159	-
0250	22.5	20h7	11 x 16	426	488	198	322	378	176	-
0280	28	25h7	11 x 16	474	546	218	361	417	195.5	-
0315	28	25h7	11 x 16	525	607	239	404	460	217	-
0355	33	30h7	11 x 16	585	679	264	453	509	241.5	-
0400	33	30h7	11 x 16	657	766	293	507	563	168.5	200
0450	38	35h7	13 x 18	735	859	325	569	625	199.5	200
0500	38	35h7	13 x 18	808	949	355	638	694	209	250

ADH G2E2 / ADH G2R



Dimensions in mm, subject to change.

ADH G2E2-0160/-0560 / ADH G2R-0630

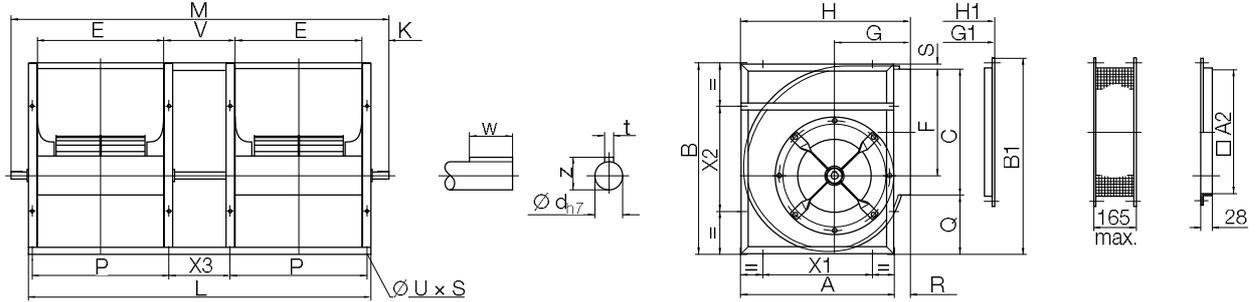

ADH G2E2-0160/-0355

ADH G2E2-0400/-0560 / ADH G2R-0630



ADH G2E2-0160/-0560 / ADH G2R-0630

	A	B	C	E	F	G	H	L	M	P
0160	267	315	205	205	173	141	293	610	710	229
0180	294	350	227	229	195	154	322	678	780	253
0200	316	383	258	256	216	163	350	762	876	286
0225	355	429	287	288	241	182	392	851	965	318
0250	390	474	322	322	268	195	427	944	1036	352
0280	439	530	361	361	302	215	474	1062	1164	391
0315	490	592	403	404	338	236	526	1180	1300	434
0355	551	669	450	453	381	261	588	1337	1451	493
0400	618	754	507	507	432	290	659	1494	1606	547
0450	691	845	571	569	487	322	735	1668	1790	619
0500	760	935	641	638	541	352	809	1854	1986	688
0560	855	1050	716	715	606	390	903	2090	2276	765
0630	940	1157	801	801	679	434	996	2332	2575	851


	Q	R	S	V	K	X1	X2	X3	t	w
0160	98	26	10	160	50	180	180	136	6	30
0180	113	28	8	180	51	180	180	156	6	30
0200	115	34	8	200	57	224	224	170	6	30
0225	129	37	11	225	57	224	224	195	6	30
0250	140	37	10	250	46	224	224	220	6	30
0280	158	35	9	280	51	280	280	250	8	40
0315	177	36	10	315	60	280	280	285	8	40
0355	204	37	13	355	57	355	355	315	8	40
0400	234	41	11	400	56	355	355	360	8	40
0450	261	44	11	450	61	530	530	400	10	50
0500	282	49	10	500	66	530	530	450	10	50
0560	319	48	13	560	93	530	530	510	12	70
0630	349	56	7	630	121	530	530	580	12	70

	z	ød	u x s	B1	H1	G1	A2	B2	C2	E2
0160	22.5	20h7	9 x 14	331	296	144	205	261	117.5	-
0180	22.5	20h7	9 x 14	368	325	157	229	285	129.5	-
0200	22.5	20h7	11 x 16	401	353	166	256	312	143	-
0225	22.5	20h7	11 x 16	444	395	185	288	344	159	-
0250	22.5	20h7	11 x 16	490	430	198	322	378	176	-
0280	28	25h7	13 x 18	547	477	218	361	417	195.5	-
0315	28	25h7	13 x 18	608	529	239	404	460	217	-
0355	33	30h7	13 x 18	682	591	264	453	509	241.5	-
0400	33	30h7	13 x 18	769	662	293	507	563	168.5	200
0450	38	35h7	13 x 18	860	738	325	569	625	199.5	200
0500	38	35h7	13 x 18	951	812	355	638	694	209	250
0560	43	40h7	13 x 18	1063	906	393	715	771	247.5	250
0630	43	40h7	13 x 18	1178	999	437	801	857	265.5	300

ADH G2E4 / ADH G2K

Dimensions in mm, subject to change.

ADH G2E4-0250/-0560 / ADH G2K-0630/-1000

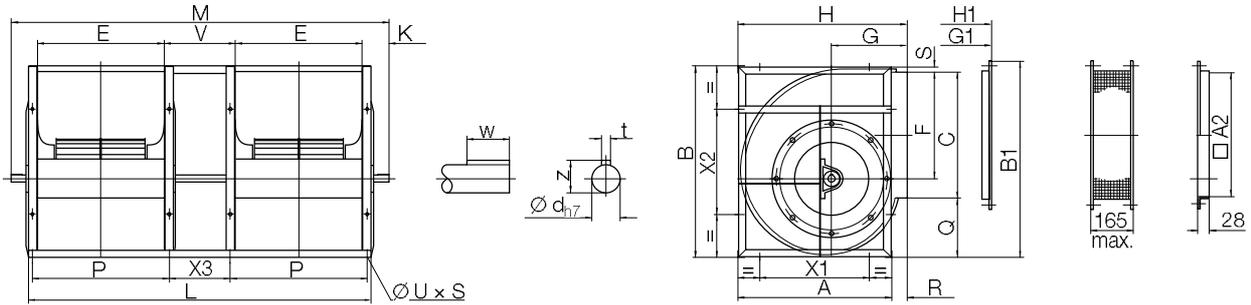


ADH G2E4-0250/-0355

ADH G2E4-0400/-0560

ADH G2K-0630

ADH G2K-0710/-1000

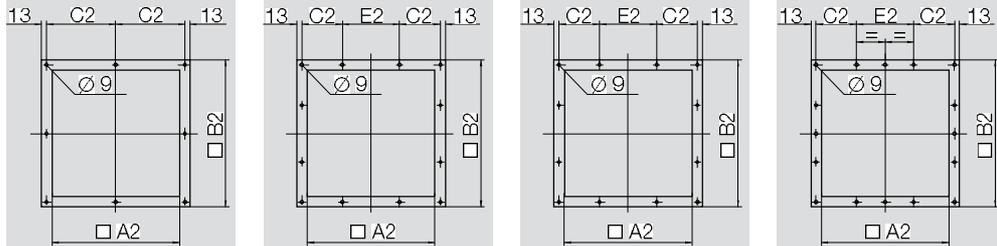

ADH G2E4-0250/-0560 / ADH G2K-0630/-1000

	A	B	C	E	F	G	H	L	M	P
0250	390	474	322	322	268	195	427	943	1085	352
0280	439	530	361	361	302	215	474	1062	1220	391
0315	490	592	403	404	338	236	526	1182	1340	434
0355	551	669	450	453	381	261	588	1341	1505	493
0400	618	754	507	507	432	290	659	1494	1660	547
0450	691	845	571	569	487	322	735	1668	1870	619
0500	760	935	641	638	541	352	809	1856	2060	688
0560	855	1050	716	715	606	390	903	2090	2330	765
0630	940	1157	801	801	679	434	1005	2332	2576	851
0710	1050	1303	898	898	765	485	1121	2606	2898	948
0800	1181	1468	1007	1007	862	540	1255	2914	3257	1057
0900	1319	1648	1130	1130	971	604	1408	3260	3550	1180
1000	1451	1810	1267	1267	1066	657	1541	3634	3927	1317



	Q	R	S	V	K	X1	X2	X3	t	t1	w
0250	140	37	10	250	71	224	224	220	8	7	40
0280	158	35	9	280	79	280	280	250	8	7	40
0315	177	36	10	315	79	280	280	285	8	7	40
0355	204	37	13	355	82	355	355	315	10	8	50
0400	234	41	11	400	83	355	355	360	10	8	50
0450	261	44	11	450	101	530	530	400	12	8	70
0500	282	49	10	500	102	530	530	450	12	8	70
0560	319	48	13	560	120	530	530	510	14	9	90
0630	349	59	7	630	122	530	530	580	14	9	90
0710	398	71	7	710	146	630	630	660	18	11	91
0800	453	74	8	800	172	710	710	750	18	11	91
0900	510	89	8	900	145	800	800	850	18	11	91
1000	534	90	9	1000	147	900	900	950	18	11	91

	z	ød	u x s	B1	H1	G1	A2	B2	C2	E2
0250	28	25h7	11 x 16	490	430	198	322	378	176.0	-
0280	33	30h7	13 x 18	547	477	218	361	417	195.5	-
0315	33	30h7	13 x 18	608	529	239	404	460	217.0	-
0355	38	35h7	13 x 18	682	591	264	453	509	241.5	-
0400	38	35h7	13 x 18	769	662	293	507	563	168.5	200
0450	43	40h7	13 x 18	860	738	325	569	625	199.5	200
0500	43	40h7	13 x 18	951	812	355	638	694	209.0	250
0560	53.5	50h7	13 x 18	1063	906	393	715	771	247.5	250
0630	53.5	50h7	13 x 18	1179	1008	437	801	857	265.5	300
0710	64	60h7	17 x 22	1391	1124	488	898	954	264.0	400
0800	64	60h7	17 x 22	1561	1258	543	1007	1063	268.5	500
0900	64	60h7	17 x 22	1748	1411	607	1130	1186	280.0	600
1000	64	60h7	17 x 22	1930	1544	660	1267	1323	298.5	700

ADH G2E7 / ADH G2K2

Dimensions in mm, subject to change.

ADH G2E7-0250/-0560 / ADH G2K2-0630/-1000

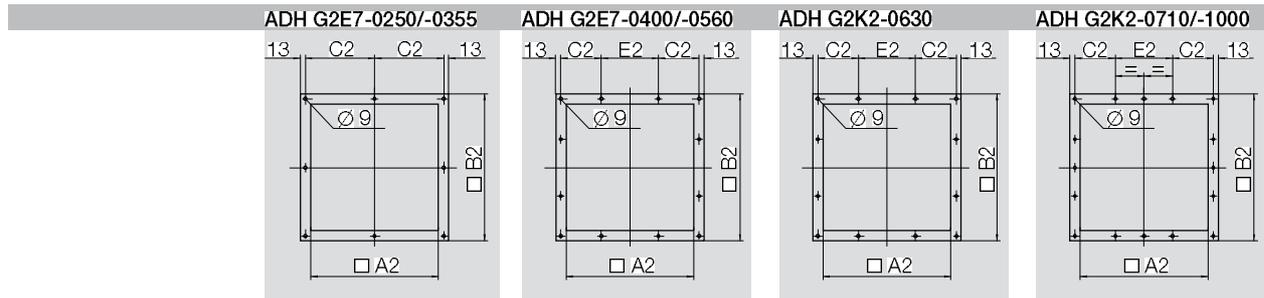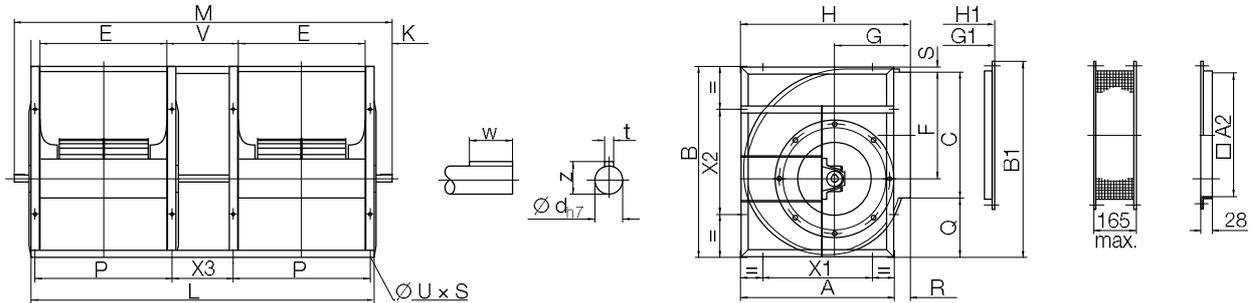

ADH G2E7-0250/-0560 / ADH G2K2-0630/-1000

	A	B	C	E	F	G	H	L	M	P
0250	390	474	322	322	268	195	427	943	1085	352
0280	439	530	361	361	302	215	474	1062	1230	391
0315	490	592	403	404	338	236	526	1182	1400	434
0355	551	669	450	453	381	261	588	1341	1545	493
0400	618	754	507	507	432	290	659	1494	1800	547
0450	691	845	571	569	487	322	735	1668	1924	619
0500	760	935	641	638	541	352	809	1856	2146	688
0560	855	1050	716	715	606	390	903	2090	2380	765
0630	940	1157	801	801	679	434	1005	2332	2576	851
0710	1050	1303	898	898	765	485	1121	2606	2898	948
0800	1181	1468	1007	1007	862	540	1255	2914	3257	1057
0900	1319	1648	1130	1130	971	604	1408	3260	3550	1180
1000	1451	1810	1267	1267	1066	657	1541	3634	3927	1317

	Q	R	S	V	K	X1	X2	X3	t	w
0250	140	37	10	250	71	224	224	220	8	40
0280	158	35	9	280	84	280	280	250	10	50
0315	177	36	10	315	109	280	280	285	12	70
0355	204	37	13	355	102	355	355	315	12	70
0400	234	41	11	400	153	355	355	360	14	90
0450	261	44	11	450	128	530	530	400	14	90
0500	282	49	10	500	145	530	530	450	18	90
0560	319	48	13	560	145	530	530	510	18	90
0630	349	59	7	630	122	530	530	580	18	91
0710	398	71	7	710	146	630	630	660	18	91
0800	453	74	8	800	172	710	710	750	18	91
0900	510	89	8	900	145	800	800	850	18	91
1000	534	90	9	1000	147	900	900	950	18	91

	z	ød	u x s	B1	H1	G1	A2	B2	C2	E2
0250	33	30h7	11 x 16	490	430	198	322	378	176.0	-
0280	38	35h7	13 x 18	547	477	218	361	417	195.5	-
0315	43	40h7	13 x 18	608	529	239	404	460	217.0	-
0355	43	40h7	13 x 18	682	591	264	453	509	241.5	-
0400	53.5	50h7	13 x 18	769	662	293	507	563	168.5	200
0450	53.5	50h7	13 x 18	860	738	325	569	625	199.5	200
0500	64	60h7	13 x 18	951	812	355	638	694	209.0	250
0560	64	60h7	13 x 18	1063	906	393	715	771	247.5	250
0630	64	60h7	13 x 18	1179	1008	437	801	857	265.5	300
0710	64	60h7	17 x 22	1391	1124	488	898	954	264.0	400
0800	64	60h7	17 x 22	1561	1258	543	1007	1063	268.5	500
0900	64	60h7	17 x 22	1748	1411	607	1130	1186	280.0	600
1000	64	60h7	17 x 22	1930	1544	660	1267	1323	298.5	700

ADH E0-0160/-0560
ADH L-0630/-0710

ADH G2E0-0160/-0500

Specifications



High performance centrifugal fan ADH E0 / ADH L

Double inlet, belt drive.
Lap jointed scroll of galvanised sheet steel assembled through a standing-seam (Sizes 0160/-0560) or by Pittsburgh lockforming (sizes 0630/-0710).
Multi-position feet and discharge flange as an option.
Impeller with forward curved blades of galvanised sheet steel, balanced in according to ISO 1940.
Straight cut off at fan discharge (sizes 0160/-0560), from size 0630 with V-cut off.
Noise tested, maintenance free, self aligning radial insert ball bearings, mounted in pressed steel housing/strut assemblies with rubber interliners.
Performance data in according to DIN 24166 tolerance class 2.

Twin fan arrangement



Twin fan arrangement

High performance centrifugal fan ADH G2E0

The two single fans ADH E0 are fitted together to a robust assembly by means of 3 U-channels. Both impellers are fitted on a common shaft supported by 3 bearings.

Fan data

Fan type	
Volume flow	Q_V	m ³ /h
Total pressure increase	p_F	Pa
Static pressure	p_{sF}	Pa
Air density at fan inlet	ρ_1	kg/m ³
Air medium temperature	t	°C
Shaft power	P_a	kW
Efficiency	(η_e)	
Speed	N	1/min
Sound power level (A weighted)	L_{WA}	dB
Weight	m	kg

Fittings / Accessories

- Multi-Position feet
- Discharge flange
- Discharge flex with flexible sleeve
- Inlet guard
- Discharge guard
- Shaft guard for free shaft end
- Matching flange
- Inspection door
- Drain plug R 1/8"
- Increase corrosion protection
- Shaft made of stainless steel
- Nuts and bolts and fastening elements made of stainless steel
- Aluminium inlet cone
- Copper inlet cone, or equipped with a copper strip (from size 0630)

ADH E2-0160/-0560
ADH R-0630/-0710

ADH G2E2-0160/-0560
ADH G2R-0630

Specifications



High performance centrifugal fan ADH E2 / ADH R

Double inlet, belt drive.
Lap jointed scroll of galvanised sheet steel assembled through a standing-seam (Sizes 0160/-0560) or by Pittsburgh lockforming (sizes 0630/-0710), discharge flange as an option.
Rectangular side frame of galvanised steel.
Impeller with forward curved blades of galvanised sheet steel, balanced in according to ISO 1940. Straight cut off at fan discharge (sizes 0160/-0560), from size 0630 with V-cut off.
Noise tested, maintenance free, self aligning radial insert ball bearings, mounted in pressed steel housing/strut assemblies with rubber interliners.
Performance data in according to DIN 24166 tolerance class 2.

Twin fan arrangement



Twin fan arrangement

High performance centrifugal fan ADH G2E2 / ADH G2R

The two single fans ADH E2 or ADH R are fitted together to a robust assembly by means of 3 angle bars. Both impellers are fitted on a common shaft supported by 3 bearings.

Fan data

Fan type	
Volume flow	Q_V	m ³ /h
Total pressure increase	p_F	Pa
Static pressure	p_{sF}	Pa
Air density at fan inlet	ρ_1	kg/m ³
Air medium temperature	t	°C
Shaft power	P_a	kW
Efficiency	(η_e)	
Speed	N	1/min
Sound power level (A weighted)	L_{WA}	dB
Weight	m	kg

Fittings / Accessories

- Discharge flange
- Discharge flex with flexible sleeve
- Inlet guard
- Discharge guard
- Shaft guard for free shaft end
- Matching flange
- Inspection door
- Drain plug R 1/8"
- Increase corrosion protection
- Shaft made of stainless steel
- Nuts and bolts and fastening elements made of stainless steel
- Aluminium inlet cone
- Copper inlet cone, or equipped with a copper strip (from size 0630)

ADH E4-0200/-0560
ADH K-0630/-1000

ADH G2E4-0250/-0560
ADH G2K-0630/-1000

Specifications



High performance centrifugal fan ADH E4 / ADH K

Double inlet, belt drive.
 Lap jointed scroll of galvanised sheet steel assembled through a standing-seam (Sizes 0200/-0560) or by Pittsburgh lockforming (sizes 0630/-1000), discharge flange as an option.
 Welded heavy duty reinforced side frames, coated.
 Impeller with forward curved blades of galvanised sheet steel, balanced in according to ISO 1940. Straight cut off at fan discharge (sizes 0200/-0560), from size 0630 with V-cut off.
 Monobloc pedestal cast iron bearings with relubrication nipple, mounted on a robust pedestal, integrated, self aligning radial insert ball bearings fixed by eccentric clamp.
 Performance data in according to DIN 24166 tolerance class 2.

Twin fan arrangement



Twin fan arrangement

High performance centrifugal fan ADH G2E4 / G2K

The two single fans ADH E4 or ADH K are fitted together to a robust assembly by means of 3 angle bars. Both impellers are fitted on a common shaft supported by 3 bearings (sizes 0250/-0630) or the fans have separated shafts being connected by an elastic coupling (sizes 0710/-1000).

Fan data

Fan type	
Volume flow	Q_V	m ³ /h
Total pressure increase	p_F	Pa
Static pressure	p_{sF}	Pa
Air density at fan inlet	ρ_1	kg/m ³
Air medium temperature	t	°C
Shaft power	P_a	kW
Efficiency	(η_e)	
Speed	N	1/min
Sound power level (A weighted)	L_{WA}	dB
Weight	m	kg

Fittings / Accessories

- Discharge flange
- Discharge flex with flexible sleeve
- Inlet guard
- Discharge guard
- Shaft guard for free shaft end
- Matching flange
- Inspection door
- Drain plug R 1/8"
- Reinforcing side frame hot dip galvanised
- Increase corrosion protection
- Shaft made of stainless steel
- Nuts and bolts and fastening elements made of stainless steel
- Aluminium inlet cone
- Copper inlet cone, or equipped with a copper strip (from size 0630)

ADH E6-0315/-0560 ADH K1-0630/-0900

Specifications



High performance centrifugal fan ADH E6 / ADH K1

Double inlet, belt drive.
Lap jointed scroll of galvanised sheet steel assembled through a standing-seam (Sizes 0315/-0560) or by Pittsburgh lockforming (sizes 0630/-1000), discharge flange as an option.
Welded heavy duty reinforced side frames, coated.
Impeller with forward curved blades of galvanised sheet steel, balanced in according to ISO 1940.
Straight cut off at fan discharge (sizes 0315/-0560), from size 0630 with V-cut off.
Monobloc pedestal cast iron bearings with relubrication nipple, mounted on a robust pedestal, integrated, self aligning radial ball bearings fixed by conical sleeve.
Performance data in according to DIN 24166 tolerance class 2.

Fan data

Fan type	
Volume flow	Q_V	m ³ /h
Total pressure increase	p_F	Pa
Static pressure	p_{sF}	Pa
Air density at fan inlet	ρ_1	kg/m ³
Air medium temperature	t	°C
Shaft power	P_a	kW
Efficiency	(η_e)	
Speed	N	1/min
Sound power level (A weighted)	L_{WA}	dB
Weight	m	kg

Fittings / Accessories

- Discharge flange
- Discharge flex with flexible sleeve
- Inlet guard
- Discharge guard
- Shaft guard for free shaft end
- Matching flange
- Inspection door
- Drain plug R 1/8"
- Reinforcing side frame hot dip galvanised
- Increase corrosion protection
- Shaft made of stainless steel
- Nuts and bolts and fastening elements made of stainless steel
- Aluminium inlet cone
- Copper inlet cone, or equipped with a copper strip (from size 0630)

ADH E7-0500/-0560 ADH K2-0630/-1000

Specifications



High performance centrifugal fan ADH E7 / ADH K2

Double inlet, belt drive.

Lap jointed scroll of galvanised sheet steel assembled through a standing-seam (sizes 0500/-0560) or by Pittsburgh lockforming (sizes 0630/-1000), discharge flange as an option.

Welded heavy duty reinforced side frames, coated.

Impeller with forward curved blades of galvanised sheet steel, balanced in according to ISO 1940. Straight cut off at fan discharge (sizes 0500/-0560), from size 0630 with V-cut off.

Size 0500

Monobloc pedestal cast iron bearings with relubrication nipple, mounted on a robust pedestal, integrated, maintenance free, self aligning radial insert ball bearings fixed by conical sleeve

Sizes 0560 up to 0800

Split pedestal cast iron bearings with relubrication nipple, mounted on a robust pedestal, integrated self aligning double row bearings fixed by conical sleeve, lubricated with long life high performance grease.

Sizes 0900 and 1000

Single piece plummer block housing, with grease nipple, mounted on robust pedestal, equipped with self aligning double row roller bearing, fixed to impeller shaft by a concentric shaft tightening, lubricated with long life high performance grease.

Performance data in according to DIN 24166 tolerance class 2.

Fan data

Fan type	
Volume flow	Q_V	m ³ /h
Total pressure increase	p_F	Pa
Static pressure	p_{sF}	Pa
Air density at fan inlet	ρ_1	kg/m ³
Air medium temperature	t	°C
Shaft power	P_a	kW
Efficiency	(η_e)	
Speed	N	1/min
Sound power level (A weighted)	L_{WA}	dB
Weight	m	kg

Fittings / Accessories

- Discharge flange
- Discharge flex with flexible sleeve
- Inlet guard
- Discharge guard
- Shaft guard for free shaft end
- Matching flange
- Inspection door
- Drain plug R 1/8"
- Reinforcing side frame hot dip galvanised
- Increase corrosion protection
- Shaft made of stainless steel
- Nuts and bolts and fastening elements made of stainless steel
- Threaded hole for measurement of shock impulse (sizes 0560 up to 1000)
- Aluminium inlet cone
- Copper inlet cone, or equipped with a copper strip (from size 0630)

ADH G2E7-0250/-0560 ADH G2K2-0630/-1000

Specifications



Centrifugal twin fan ADH G2E7 / ADH G2K2

Double inlet, belt drive.

Lap jointed scroll of galvanised sheet steel assembled through a standing-seam (Sizes 0250/-0560) or by Pittsburgh lockforming (sizes 0630/-1000), fitted together to a robust assembly by means of 3 crossbars, discharge flange as an option.

Welded heavy duty reinforced side frames, coated.

Both impellers, with forward curved blades, made of galvanised sheet steel, are fitted on a common shaft supported by 3 bearings (sizes 0250/-0630) or the fans have separated shafts being connected by a flexible coupling (sizes 0710/-1000), balanced in according to ISO 1940.

Straight cut off at fan discharge (sizes 0250/-0560), from size 0630 with V-cut off.

Sizes 0250 up to 0630

Single piece cast iron block housing with relubrication nipple, mounted on a robust pedestal, integrated, maintenance free, self aligning radial insert ball bearings fixed by conical sleeve.

Sizes 0710 up to 1000

Single piece cast iron block housing with relubrication nipple, mounted on a robust pedestal,

outside bearings: integrated self aligning double row roller bearings, fixed by conical sleeve, lubricated with long life high performance grease.

inside bearings: integrated single row ball bearings, fixed by eccentric clamp, lubricated with long life high performance grease.

Performance data in according to DIN 24166 tolerance class 2.



Fan data

Fan type	
Volume flow	Q_V	m ³ /h
Total pressure increase	p_F	Pa
Static pressure	p_{sF}	Pa
Air density at fan inlet	ρ_1	kg/m ³
Air medium temperature	t	°C
Shaft power	P_a	kW
Efficiency	(η_e)	
Speed	N	1/min
Sound power level (A weighted)	L_{WA}	dB
Weight	m	kg

Fittings / Accessories

- Discharge flange
- Discharge flex with flexible sleeve
- Inlet guard
- Discharge guard
- Shaft guard for free shaft end
- Matching flange
- Inspection door
- Drain plug R 1/8"
- Reinforcing side frame hot dip galvanised
- Increase corrosion protection
- Shaft made of stainless steel
- Nuts and bolts and fastening elements made of stainless steel
- Threaded hole for measurement of shock impulse (sizes 0560 up to 1000)
- Aluminium inlet cone
- Copper inlet cone, or equipped with a copper strip (from size 0630)

Fittings / Accessories

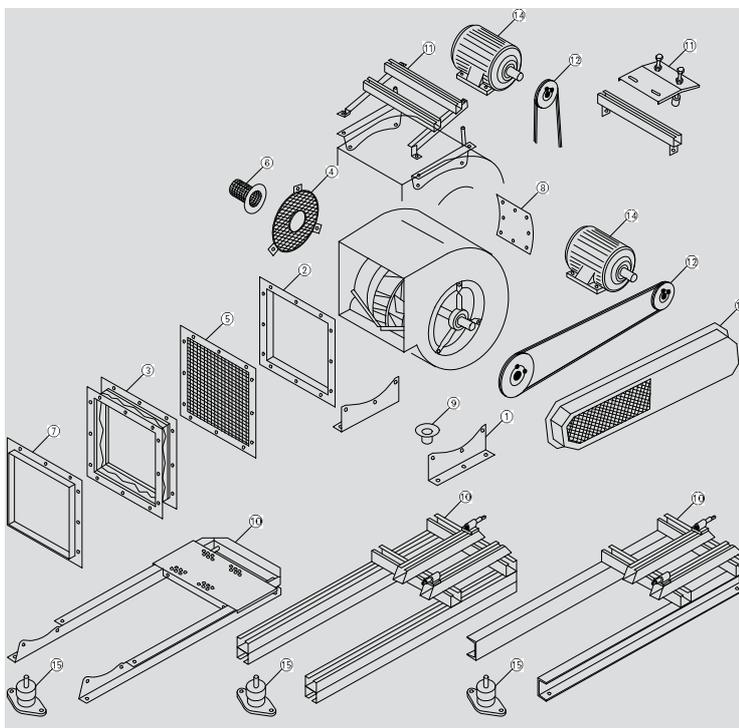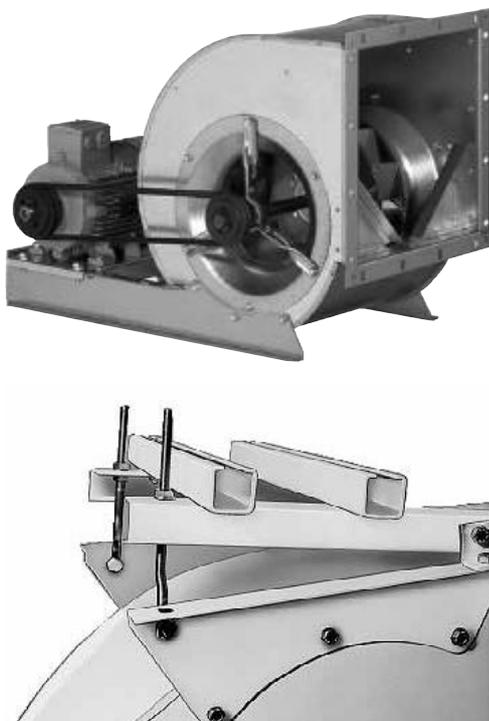

- [1] Mounting feet
- [2] Discharge flange
- [3] Discharge flex
- [4] Inlet guard
- [5] Discharge guard
- [6] Shaft guard
- [7] Mounting flange
- [8] Inspection door
- [9] Drain plug
 - ▶ extended corrosion protection
 - ▶ ATEX-Execution (RZR)
 - ▶ Impellerblades continuously welded (RZR)
 - ▶ Casing continuously welden-inside (RZR)
 - ▶ Casing continuously welden- inside/outside (RZR)
 - ▶ Split casing (RZR 13/19)
 - ▶ Shaft from stainless steel
 - ▶ Nuts and bolts from stainless steel
 - ▶ Thread for impuls sensor fitting
 - ▶ Volumeter (RDH / RZR)
 - ▶ Copper inlet cone
 - ▶ Aluminium inlet cone (ADH / AT / RDH)
 - ▶ hot dip galvanised side frame (ADH / RDH)
 - ▶ relubricatable bearings (relubrication during operation, RZR)

Fan set (ADH / AT / RDH on request)

- [10] Base frame
- [11] Pick-a-Back
- [12] Belt drive
- [13] Drive guard
 - ▶ Belt guard split horizontally
 - ▶ Access door on belt guard
 - ▶ Opening on belt guard for speed measuring device
- [14] Drive motor
- [15] Anti-vibration mounts

Gebhardt fan systems – the "completely carefree" package for installation fans with belt drive

Fan systems with components tailored for each other, precisely assembled and adjusted, individually tested, delivered quickly and on time, allow for problem-free processing and ensure long and reliable operation.

Size has its price so we build as small as possible

- ▶ Optimised base frame lengths, tailored to the casing position and motor size and small system construction heights save valuable space in the air conditioning unit
- ▶ Various casing and drive positions allow for individual adjustment to the most diverse applications
- ▶ Optimised flat belt drives allow for efficient operation with a high level of convenience

Where required, we deliver our fan systems with safety equipment complying with DIN EN ISO 13857 for safe operation!

e.g. Belt guard

- ▶ also as segmented design
- ▶ also with inspection hole
- ▶ also with rotation speed measurement opening.

Fan set diversity

Version	Description	Figure
Pick-A-Back	for sizes 0200/-0355	
Pick-A-Back	for sizes 0400/-1000	
Compact base frame	Integrated compact base frame for sizes up to 0500.	
Base Frame, CC-profile	Base frames made from CC-profiles with length optimisation.	
Base Frame, U-profile	Heavy duty base frame made from U-profiles, welded and painted, from size 0800 upward.	

Fittings / Accessories

Drain Plug



If the fan is installed outside, or if conveying a medium containing humidity, condensation of water may accumulate inside the fan scroll.

For extraction of this water a condense water drain has to be installed at the lowest point of the scroll.


The drain will be provided with a thread for connecting it to a piping.

At order please indicate the required casing position.

Connecting thread / hole

- ▶ ADH / RDH = female thread R 1/8"
- ▶ AT = drain hole
- ▶ RZR 0200/-1000 = male thread R 1/2"
- ▶ RZR 1120/-1600 = male thread R 1"

Dimensions

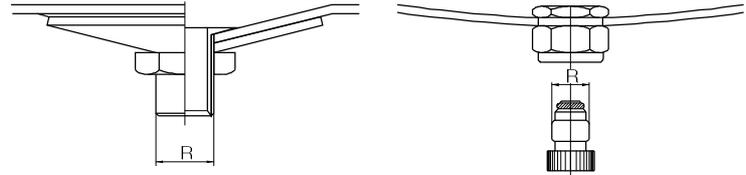

Inspection Door



For the purposes of maintenance and cleaning there is an opening, which can be securely closed by means of an access door, in the fan casing.


As it can only be opened with a tool, the access door complies with safety and accident prevention regulations. Additional securing with locking bars can be supplied on request.

The site and orientation of the inspection opening depends on the casing position.

The position should be specified when ordering according to the following diagram:

e.g. Access door, Pos. 2.

Inspection Door Positions

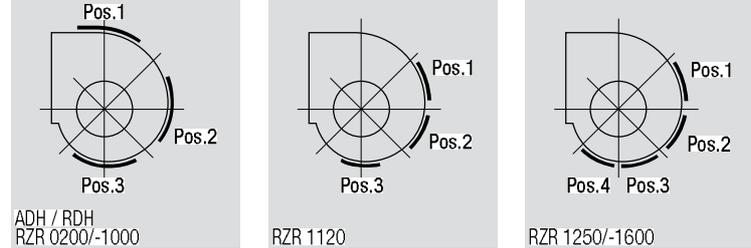

Dimensions in mm, subject to change.

ADH ..-		RDH ..-		RZR ..-	
0160/-0180	100 x 230	0180	100 x 230	-	
0200/-0280	240 x 240	0200/-0280	240 x 240	0200	160 x 160
0315/-0560	360 x 360	0315/-0560	360 x 360	0225/-0315	210 x 210
0630/-1000	500 x 500	0630/-1000	500 x 500	0355/-1000	310 x 310
-	500 x 500	1120/-1400	500 x 500	1120/-1600	500 x 500

Fittings / Accessories

Corrosion Protection Systems



Nicotra Gebhardt fans are treated with high quality corrosion protection as standard. Under extreme operating conditions, however, additional corrosion protection is advisable.

ADH / AT / RDH

Extended corrosion protection for series ADH, AT and RDH only available on request.

RZR

Depending on the use to which the fan is to be put and the degree of exposure to corrosion, we offer various anti-corrosion protection measures.

Corrosion protection - Class S40

Degreasing, ironphosphating

- ▶ **Powder coating** Layer thickness $\geq 40 \mu\text{m}$, Colour RAL 7039
- ▶ **Wet lacquering** Layer thickness $\geq 40 \mu\text{m}$ (primer + lacquer finish), Colour RAL 7039

Corrosion protection - Class K90

Degreasing, ironphosphating

- ▶ **Powder coating** Layer thickness $\geq 90 \mu\text{m}$, Colour RAL 7039
- ▶ **Wet lacquering** Layer thickness $\geq 90 \mu\text{m}$ (primer + lacquer finish), Colour RAL 7039

Corrosion protection - Class P100

Degreasing, ironphosphating

- ▶ **Thermoplastic powder coating** Layer thickness $\geq 100 \mu\text{m}$, Colour RAL 7001

Continuously welded blades



Impeller blades can be continuously welded in order to increase the corrosion resistance when conveying a humid or slightly aggressive medium. The continuous welding has no influence on the material resistance or on the max. tip speed.

Continuously welded scroll



The casing can be continuously welded in order to increase the corrosion resistance when conveying a humid or slightly aggressive medium. By continuous welding the casing is provided with additional impermeability.

- ▶ **GEH 01** - Casing inside continuously welded
- ▶ **GEH 02** - Casing inside and outside continuously welded

Fittings / Accessories

Split Casing




There may be a lot of reasons to choose a split casing, the advantages of split casings are:

- ▶ smaller openings for fan chambers
- ▶ easier refitting of fan
- ▶ easier transport to site
- ▶ easier access to impeller for cleaning and maintenance

The joint face on the casing position runs horizontally above or under the fan axis (see drawing). The reinforced side frames are not divisible. The fan is supplied fully assembled.

Dimensions in mm, subject to change.

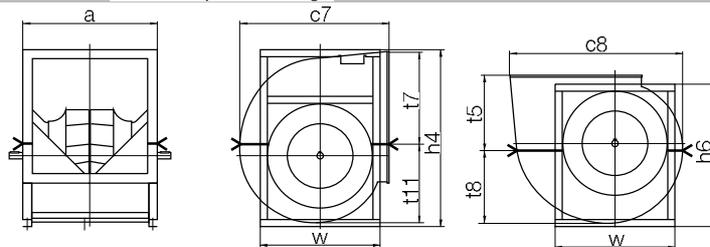

RZR	RZR	a	c7	c8	h4	h6	t5	t7	t8	t11	w
13-	19- 0500	709	822	950	957	783	410	473	409	477	652
13-	19- 0560	785	914	1061	1083	884	458	531	456	530	743
13-	19- 0630	872	1021	1188	1204	984	511	594	510	594	820
13-	19- 0710	967	1143	1331	1350	1100	572	666	571	665	905
13-	19- 0800	1086	1280	1498	1520	1245	640	749	640	749	1035
13-	19- 0900	1219	1439	1686	1707	1386	719	843	720	843	1140
13-	19- 1000	1356	1568	1847	1869	1509	784	923	784	924	1230

Stainless Steel Shaft



For applications where there is an increased risk of corrosion, an optional shaft made of stainless steel can be supplied.

- ▶ **ADH / AT / RDH**
Stainless steel 1.4301 / AISI 304 / XCrNi18-10
- ▶ **RZR**
Stainless steel 1.4305

Stainless Steel Nuts and Bolts



For applications where there is an increased risk of corrosion, the connecting elements of the fan can be ordered made of stainless steel.


Impuls Sensor Thread



A tapped hole M6 or M8 can be provided in the pedestal bearing cast housing for admission of sensors to measure the shock impulses. (The measuring connecting piece is not included in the scope of delivery).

Fittings / Accessories

Volumeter



$$q_v = K \times \sqrt{\frac{2}{\rho} \times \Delta p_{Dü}}$$



Measuring connector in inlet cone
Hose pipe to connecting piece in the side wall
Connecting piece (external diameter of 6mm) for the pressure measurement

With the flow measuring device it is possible to easily measure/monitor the flow rate after the fan is installed. A pressure tapping at a predetermined position on the inlet cone is provided whereby the differential pressure in relation to the static pressure is measured in front of the inlet cone in a static atmosphere.
Permissible media temperature: +80 °C (RZR), +70 °C (RDH).

In order to calculate the flow rate, a calibrating factor "K" is required. This factor is determined by comparative measurement on a standard test rig.


Standard-calibration faktor K

Where fans are built into a plenum, the pressure difference between the static pressure in the inlet side plenum and the pressure on the inlet cone is to be measured. It must be ensured that the static pressure to be measured in front of the inlet cone is not tampered by dynamic pressure fractions.

It is often recommended to arrange a ring of points on the wall facing the outlet side as illustrated in the sketch.

When using the K-factors specified below, a minimum clearance of 0.5xD between the inlet cone of the fan and the side wall of the plenum must be maintained. Indentations that obstruct the flow to the cone can lead to faults when measuring the flow rate.

In the event that the differential pressure is fed via a pressure sensor, the signal can also be used for regulating purposes.



- ▶ volume flow q_v [m³/h]
- ▶ calibration factor K [m²s/h]
- ▶ density of media ρ [kg/m³]
- ▶ pressure difference at cone $\Delta p_{Dü}$ [Pa]

Calibration factors

Type	Standard calibration factor K m ² s/h
IMV 13-0200	100
IMV 13-0225	115
IMV 13-0250	140
IMV 13-0280	165
IMV 13-0315	190
IMV 13-0355	235
IMV 13-0400	290
IMV 13-0450	360
IMV 13-0500	460
IMV 13-0560	560
IMV 13-0630	730
IMV 13-0710	960
IMV 13-0800	1180
IMV 13-0900	1450
IMV 13-1000	1850
IMV 13-1120	2400
IMV 13-1250	3000
IMV 13-1400	3800
IMV 13-1600	4700

Inlet Cones



Inlet cone of copper or aluminium prevent the production of sparks during operation. These can be employed when spark protection is required, but ATEX is not mandatory.

Hot Dip Galvanised Side Frame



Fan Ranges ADH/RDH E4, E6, E7 or K, K1, K2

For applications where an increased corrosion protection is required the reinforcing side frames of the casing can be executed in hot dip galvanisation as an option.

Fittings / Accessories

Relubrications



ADH / AT / RDH



RZR

Series RZR

The lubrication unit IWN allows the fan bearings to be greased even when in operation.

The lubrication tubes screwed into the bearing housing are lead out and fastened at the side wall of the fan.

If desired, the lubrication tubes can be lead to the drive side of the fan.

▶ IWN 01 - uses standard grease

▶ IWN 11 - uses moisture resistant grease

For more details see "Technical Description" - "Bearings"!

Series ADH / RDH

The bearing housings of the fan ranges ADH / RDH E4, E6, E7 or K, K1, K2 and AT AR, TIC are equipped with directly fitted grease nipples.

Mounting feet



Feet made from galvanized steel, either mounted or loose, enable the fan to be installed with a 0, 90 and 270 orientation.

Protection guards




The fans are designed for installation in equipment and as standard are not equipped with protective guards.

They should not be put into operation before all protective devices are fitted and connected!

Protective measures must be carried out as set out in DIN EN ISO 12100 "Safety of machinery - Basic concepts, general principles for design".

If the application of the fan allows free access to the inlet and discharge apertures, safety devices must be put in place on the fan in accordance with DIN EN ISO 13857! Suitable safety guards are available as an optional extra.

Shaft Guards



Contact guard for the free end of the shaft for double inlet centrifugal fans. Models in accordance with DIN EN ISO 13857, made of painted steel mesh.

Flanges



Made from galvanized or painted steel, to connect ducts and system components to the fan outlet side.

Flexible Connections



Connecting piece with elastic intermediate section for the vibration or impact-noise decoupled connection of the fan to the system or unit. Made out of two connecting flanges with elastic intermediate section.



Temperature range / Application

▶ Standard up to +80 °C

▶ ATEX max. +60 °C

Fittings / Accessories

Anti Vibration Mounts



Fastening for CC-profile



Fastening for U-profile

AV mounts are designed to prevent noise and vibrations being transmitted through the base of the fan.

AV mounts should be mounted beneath the fan base frame so the weight and spring deflections are evenly distributed. They should not be mounted symmetrically because a counter force is induced into the system by the pressure created by the working fan.

It is difficult for the manufacturer to establish the position of the AV mounts to suit all types of application.

Vibration and noise insulation can also be improved by ensuring that the fan is connected to its external environment by a flexible coupling.


Rubber pads and **buffers** for both vibration and noise insulation at fan speeds above 1400 rpm or 850 rpm.

Rubber buffers for noise insulation only at fan speeds under 800 rpm or 1700 rpm.

Spring diffusers with noise insulation layer and height adjustment, for both vibration and noise insulation at fan speeds above 400 rpm.

Available AV mounts for different fans, see proSELECTA II.
The AVM-mounts are supplied with the suitable mounting material for the base frame.


Anti Vibration Rubber Pads

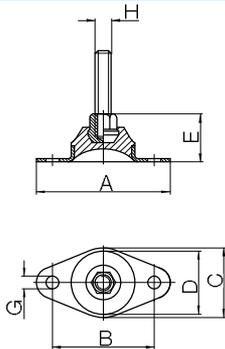

ZBD	ZBD	A	B	C	D	E	G	H
21-6035A*	21-6035C*	60	45	35	30	20	5	M6
21-6065A*	21-6065C*	60	45	35	30	20	6	M6
21-5935A*	21-5935C*	90	70	50	45	32	9	M10
21-5950A*	21-5950C*	90	70	50	45	32	9	M10

* A = for U-profile, C = for CC-profile

Anti Vibration Rubber Buffers

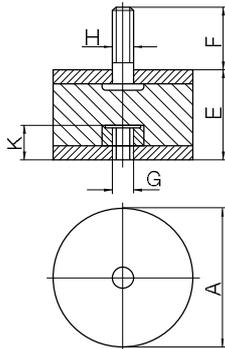


ZBD	ZBD	A	E	F	G	H	K
01-0405A*	01-0405C*	20	25	16	M 6	M 6	6.5
03-0503A*	03-0503C*	25	15	11	M 6	M 6	6.5
01-0504A*	01-0504C*	25	20	11	M 6	M 6	6.5
03-0806A*	03-0806C*	40	30	21	M 8	M 8	9.5
03-1007A	03-1007C*	50	34	26.5	M 10	M 10	10.5
03-1510A*	03-1510C*	75	50	39	M 12	M 12	12.5
02-2008A*	02-2008C*	100	40	44	M 16	M 16	16.5

* A = for U-profile, C = for CC-profile

Fittings / Accessories


Anti Vibration Spring Diffusers

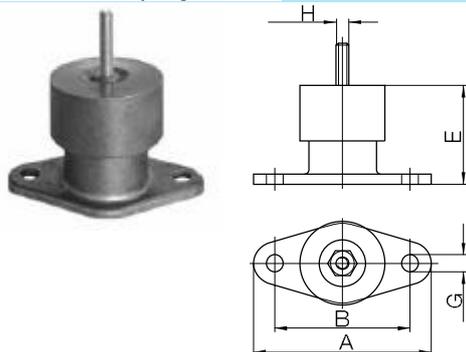

ZBD	ZBD	A	B	C	D	~ E	~ F	G	H
60-0101A*	60-0101C*	130	100	70	72	70-50	35	13	M10
60-0103A*	60-0103C*	130	100	70	72	70-50	35	13	M10
60-0105A*	60-0105C*	130	100	70	72	70-50	35	13	M10
60-0108A*	60-0108C*	130	100	70	72	70-50	35	13	M10
60-0112A*	60-0112C*	150	120	82	92	90-75	35	13	M12
60-0120A*	60-0120C*	150	120	82	92	90-75	35	13	M12
60-0130A*	60-0130C*	150	120	82	92	90-75	35	13	M12
60-0150A*	60-0150C*	150	120	82	92	110-85	35	13	M12

* A = for U-profile, C = for CC-profile


Anti Vibration Spring Diffusers

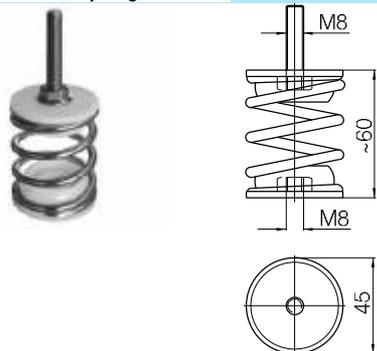

ZBD	ZBD
SP-7701A*	SP-7701C*
SP-7702A*	SP-7702C*
SP-7703A*	SP-7703C*
SP-7704A*	SP-7704C*
SP-7705A*	SP-7705C*
SP-7706A*	SP-7706C*
SP-7707A*	SP-7707C*

* A = for U-profile, C = for CC-profile


Anti Vibration Spring Diffusers

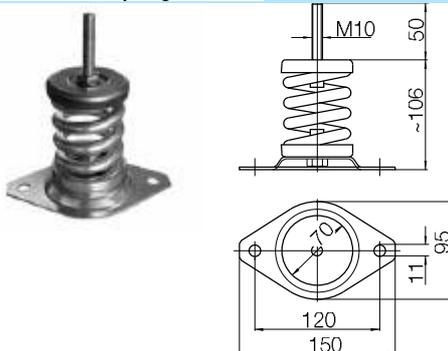

ZBD	ZBD
SP-7501A*	SP-7501C*
SP-7502A*	SP-7502C*
SP-7503A*	SP-7503C*
SP-7504A*	SP-7504C*
SP-7505A*	SP-7505C*
SP-7506A*	SP-7506C*
SP-7507A*	SP-7507C*
SP-7508A*	SP-7508C*

* A = for U-profile, C = for CC-profile

Anti Vibration Spring Diffusers

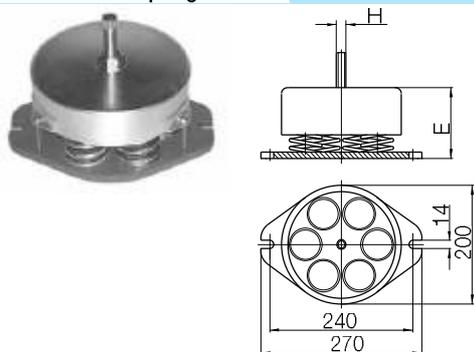

ZBD	ZBD	E	H	kg
80-W603A*	80-W603C*	68-101	M 16	8.3
80-W605A*	80-W605C*	76-101	M 16	8.6
80-W608A*	80-W608C*	86-105	M 16	9.0
80-W612A*	80-W612C*	84-104	M 16	9.3
80-W616A*	80-W616C*	92-105	M 24	9.7

* A = for U-profile, C = for CC-profile

Fan Sets

Base Frame with Belt Tensioning Device

G2Z-component size 0200/-0500 (only RZR 11/19)



This compact base frame with integrated motor tensioning slider provides optimum compactness and easiest handling.

- ▶ The base frame made of galvanized sheet steel is screwed directly onto the fan (without any casing feet) – the result being the low overall height of the system.
- ▶ The overall length depending on the casing position and size of the motor is a further factor influencing the optimum compactness.
- ▶ The integrated tensioning slider considerably simplifies re-adjustment of the belt drive during maintenance and service work.

G1Z-component size 0400/-0710



The base frames up to motor size 180 are manufactured from galvanized CC-profiles. The anti-vibration mounts in the CC-profile provide infinitely variable adjustment. From motor size 200 the base frames are of U-profile, welded and painted. Fitted motor tensioning tracks that allow the motor to be shifted longitudinally, allow for the simple adjustment of the belt tension.

G1Z-component size 0800/-1600



Base frame of stable U-profiles, welded and painted, with holes for attaching the anti-vibration mounts. Fitted motor tensioning tracks that allow the motor to be shifted longitudinally, allow for the simple adjustment of the belt tension.

Equipment



- ▶ FKS hot-dip galvanized for U-profile base frame

Pick-A-Back




This allows the motor to be fixed directly onto the fan casing, where space around the fan is limited. One side of the pick-a-back is fixed to the casing so that it swivels, while the other is supported on a spindle. Thus the pick-a-back becomes adjustable to leave room for tensioning the drive belt. The various motor arrangements and casing positions are shown in the drawings.

The accompanying tables also show the maximum permissible motor sizes. When using a pick-a-back arrangement and fitting anti vibration mounts (AVM) an additional base frame for fitting the AVM may be required depending on the position of the centre of gravity of the whole fan set.



Fan Sets

Belt Drive Wedge Belts



High performance narrow V-belts in accordance with DIN 7753 are temperature stable up to +80 °C, resistant to mineral oils and electrostatically conductive. The belt pulleys are made of high quality cast iron and, depending on the peripheral velocity and number of grooves, are statically (G 16) or dynamically (G 6.3) balanced. They are fastened to the shaft of the motor or fan by means of a clamping bush.

Flat Belts



The flat belt drives employed are made using the most modern technology and materials. They are the centrepiece of highly developed, powerful belt drives. This modern flat belt drive has distinct advantages over traditionally employed V-belt drives and exceeds it in efficiency, quiet running and economy.

Overview of the advantages:

- ▶ higher efficiency
- ▶ longer service life
- ▶ quieter running
- ▶ easy to install
- ▶ low maintenance
- ▶ no wear on the belt - so it is possible to dispense with the 2nd filter stage in the air conditioning unit (in accordance with VDI 6022)

Belt Guard




Totally enclosed belt guards are made from galvanised sheet steel in accordance with DIN EN ISO 13857.

The front section can be removed for maintenance. If there is no standard belt guard available for the selected belt drive (see table), a suitable belt guard will be made as a welded construction and then coated.

Features

- ▶ belt guard split horizontally
- ▶ access door on belt guard
- ▶ opening on belt guard for speed measuring device

Dimensions in mm, subject to change.

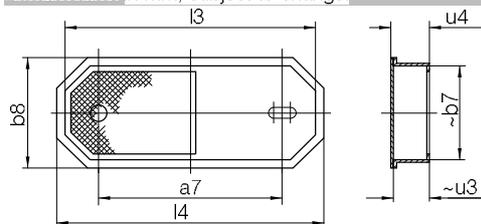

RBS	a7 _{max}	DW _{max}	b8	b7	s5	u4	u3	l4	l3
01-....-01	250	90	194	159	97	72	69	444	404
01-....-02	300	90	194	159	97	72	69	494	454
01-....-03	350	160	264	229	132	72	69	614	574
01-....-04	400	160	264	229	132	72	69	664	624
01-....-05	450	160	264	229	132	72	69	714	674
01-....-06	500	160	264	229	132	72	69	764	724
01-....-07	600	160	264	229	132	72	69	864	824
01-....-08	700	125	264	229	132	72	69	964	924
01-....-09	800	125	264	229	132	72	69	1064	1024
01-....-10	900	125	264	229	132	72	69	1164	1124
01-....-11	450	250	344	304	172	122	119	794	754
01-....-12	500	250	344	304	172	122	119	844	804
01-....-13	600	250	344	304	172	122	119	944	904
01-....-14	700	315	484	444	242	122	119	1184	1144
01-....-15	800	315	484	444	242	122	119	1284	1244
01-....-16	900	315	484	444	242	122	119	1384	1344
01-....-17	1000	315	484	444	242	122	119	1484	1444
01-....-18	1100	315	484	444	242	122	119	1584	1544
01-....-19	1200	315	484	444	242	122	119	1684	1644

... Placeholder for fan-size


DW_{max} Diameter of the biggest pulley

a7_{max} Maximum axle centre distance

RZR 11-0200/-0500

Fan set arrangement with base frame

Dimensions in mm, subject to change.

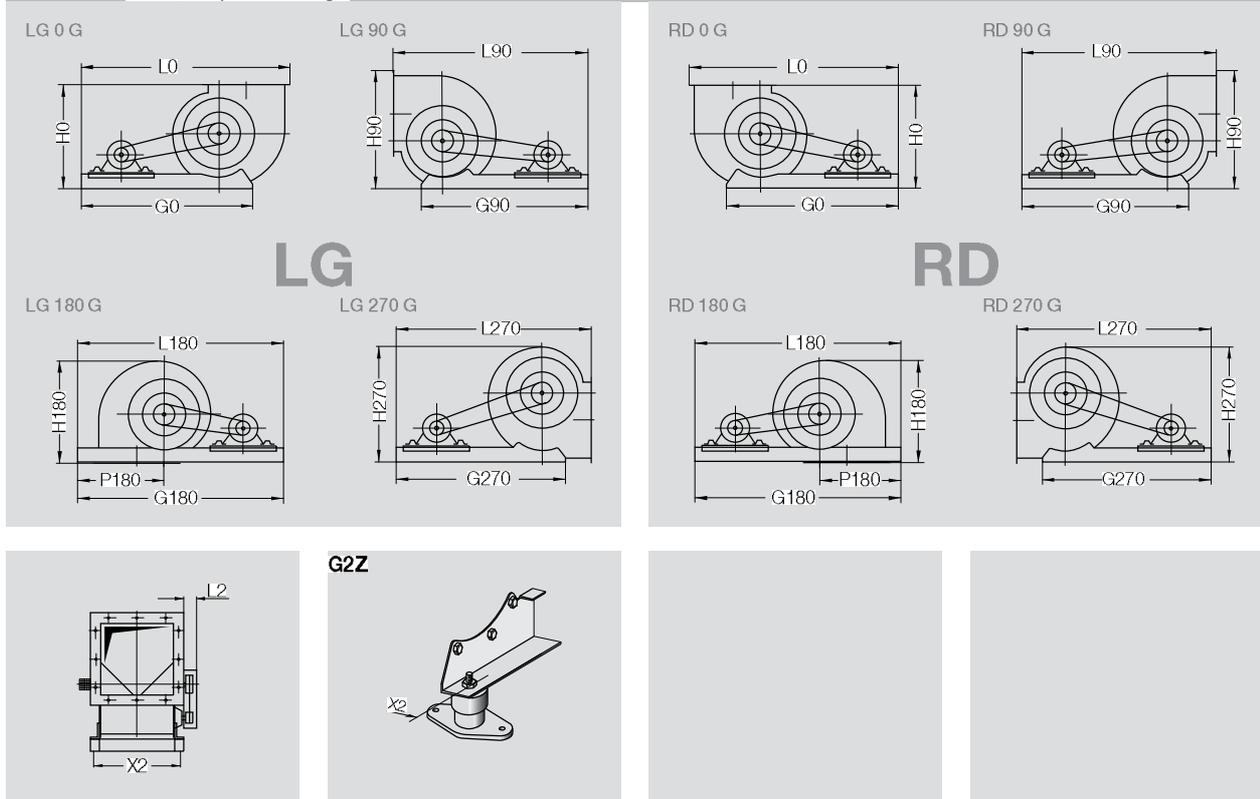

RZR	RZR		② G0	② G90	② G180	② G270	H0	H90	H180	H270
11-	19-	0200	625	650	880	650	358	408	356	386
11-	19-	0225	680	710	925	710	404	467	401	431
11-	19-	0250	705	730	974	730	440	510	438	477
11-	19-	0280	725	755	1031	755	489	569	485	531
11-	19-	0315	750	785	1094	785	542	623	537	597
11-	19-	0355	845	885	1207	885	603	689	601	670
11-		0400	990	970	1350	970	671	773	667	749
11-		0450	1030	1010	1440	910	755	868	750	840
11-		0500	1070	1050	1530	1050	827	956	821	929

RZR	RZR		② L0	② L90	② L180	② L270	L2	P180	X2	Motor Base frame ~ kg max.
11-	19-	0200	745	740	880	740	100	396	286	132 6
11-	19-	0225	793	792	925	792	100	423	322	132 7
11-	19-	0250	843	829	974	829	100	450	356	132 7.5
11-	19-	0280	893	876	1031	876	100	482	395	132 8
11-	19-	0315	952	931	1094	931	100	520	438	132 9
11-	19-	0355	1087	1090	1207	1060	100	552	487	160 10
11-		0400	1219	1120	1350	1120	120	587	546	180 11
11-		0450	1315	1203	1440	1203	120	646	612	180 12
11-		0500	1400	1279	1530	1279	120	700	680	180 14


② The base frame length has been determined with the always largest admitted motor size. With smaller motors the frame length will be reduced.

For accurate dimensions use proSELECTA II or on request.

RZR 11-0400/-0710

Fan set arrangement with base frame

Dimensions in mm, subject to change.

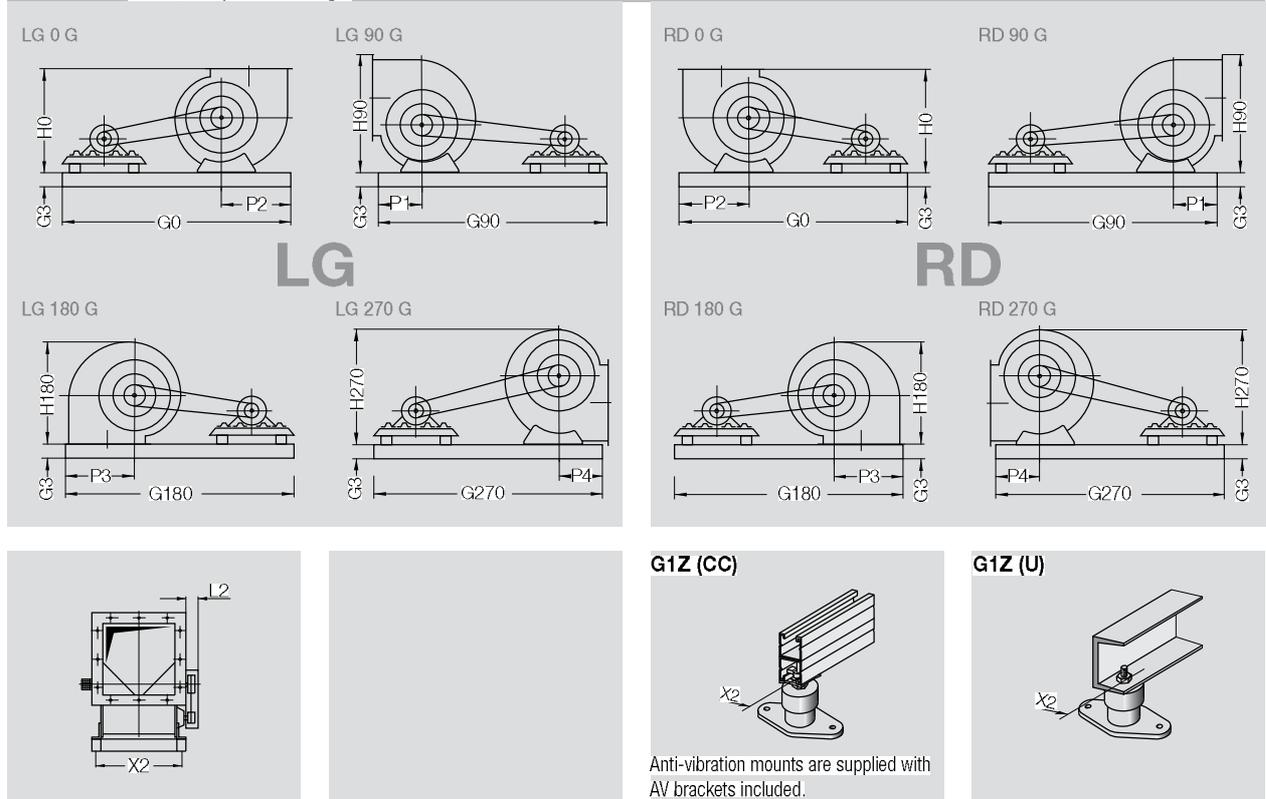

Anti-vibration mounts are supplied with AV brackets included.

RZR		②	②	②	②	G3 for motor size					
		G0	G90	G180	G270	63-71	80-90	100-132	160-180	200-225	250-280
11-	0400	1240	1300	1650	1240	82-CC	82-CC	82-CC	82-CC	80-U ③	-
11-	0450	1300	1350	1740	1298	82-CC	82-CC	82-CC	82-CC	80-U ③	-
11-	0500	1434	1405	1772	1405	82-CC	82-CC	82-CC	82-CC	80-U ③	-
11-	0560	1558	1508	1908	1508	82-CC	82-CC	82-CC	82-CC	80-U ③	-
11-	0630	1600	1574	2006	1574	-	82-CC	82-CC	82-CC	80-U ③	-
11-	0710	1708	1680	2145	1680	-	82-CC	82-CC	82-CC	-	-
11-	0710-U	1700	1700	2115	1700	-	-	-	-	100-U	120-U ③

RZR		H0	H90	H180	H270	L2	P1	P2	P3	P4	X2	Motor Base frame ~ kg		
												max.	CC	80-U 100-U
11-	0400	671	773	667	749	120	275	355	669	275	550	225	31	③ ③
11-	0450	755	868	750	840	120	320	408	718	320	614	225	32	③ ③
11-	0500	827	956	821	929	120	348	452	766	348	682	225	33	60 -
11-	0560	921	1071	914	1041	150	384	502	851	384	759	225	34	63 -
11-	0630	1028	1195	1021	1168	150	432	566	915	432	846	225	35	68 -
11-	0710	1152	1341	1143	1316	180	479	625	1014	479	943	180	37	- -
11-	0710-U	1152	1341	1143	1316	180	-	-	-	-	943	250	-	94 145

② The base frame length has been determined with the always largest admitted motor size. With smaller motors the frame length will be reduced.






For accurate dimensions use proSELECTA II or on request.

③ Dimensions on request

RZR 12-0200/-0710

Fan set arrangement with base frame

Dimensions in mm, subject to change.

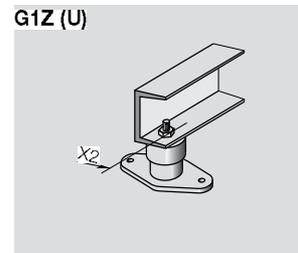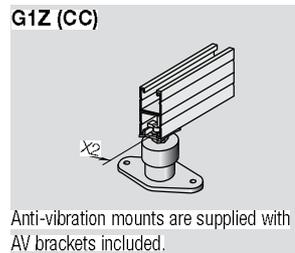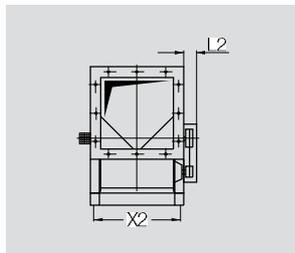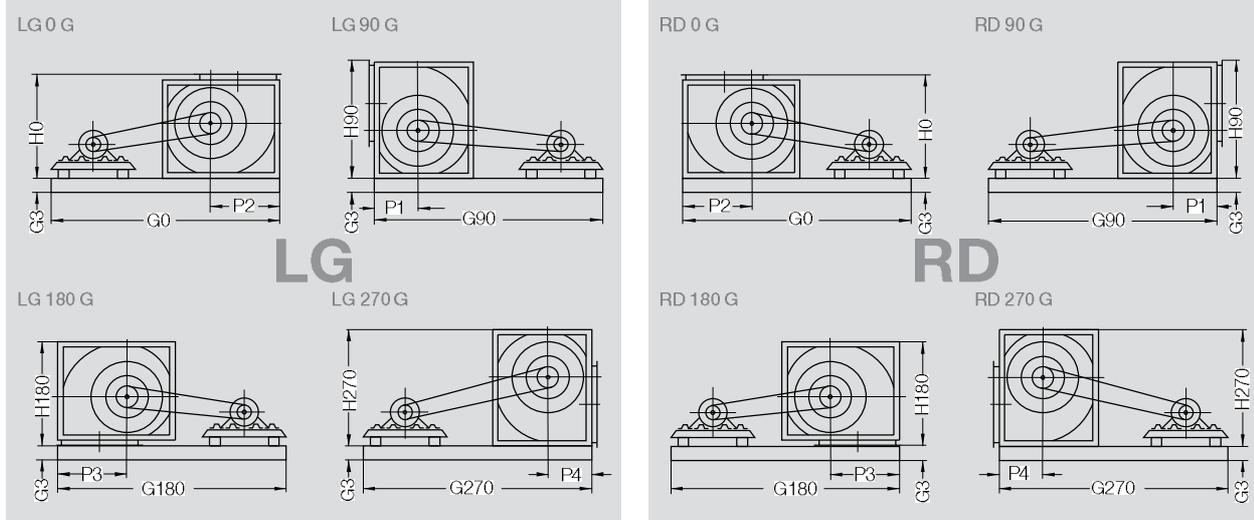

RZR		②	②	②	②	G3 for motor size					
		G0	G90	G180	G270	63-71	80-90	100-132	160-180	200-225	250-280
12-	0200	④	④	④	④	-	-	-	-	-	-
12-	0225	④	④	④	④	-	-	-	-	-	-
12-	0250	④	④	④	④	-	-	-	-	-	-
12-	0280	④	④	④	④	-	-	-	-	-	-
12-	0315	④	④	④	④	-	-	-	-	-	-
12-	0355	④	④	④	④	-	-	-	-	-	-
12-	0400	1430	1312	1655	1312	82-CC	82-CC	82-CC	82-CC	80-U ③	-
12-	0450	1522	1388	1740	1388	82-CC	82-CC	82-CC	82-CC	80-U ③	-
12-	0500	1610	1460	1830	1460	82-CC	82-CC	82-CC	82-CC	80-U ③	-
12-	0560	1736	1561	1958	1561	82-CC	82-CC	82-CC	82-CC	80-U ③	-
12-	0630	1865	1670	2078	1670	-	82-CC	82-CC	82-CC	80-U ③	-
12-	0710	2008	1784	2235	1784	-	82-CC	82-CC	82-CC	-	-
12-	0710-U	2035	1840	2235	1840	-	-	-	-	100-U	120-U ③

RZR		H0	H90	H180	H270	L2	X2	Motor Base frame ~ kg			
								max.	CC	80-U	100-U
12-	0200	④	④	④	④	④	④	④	④	④	④
12-	0225	④	④	④	④	④	④	④	④	④	④
12-	0250	④	④	④	④	④	④	④	④	④	④
12-	0280	④	④	④	④	④	④	④	④	④	④
12-	0315	④	④	④	④	④	④	④	④	④	④
12-	0355	④	④	④	④	④	④	④	④	④	④
12-	0400	669	769	669	750	120	550	225	31	③	③
12-	0450	753	865	753	841	120	614	225	32	③	③
12-	0500	825	955	825	931	120	682	225	33	60	-
12-	0560	920	1067	920	1046	150	759	225	34	63	-
12-	0630	1027	1195	1027	1173	150	846	225	35	68	-
12-	0710	1152	1341	1152	1324	180	943	180	37	-	-
12-	0710-U	1152	1341	1152	1324	180	-	250	-	94	155


② The base frame length has been determined with the always largest admitted motor size. With smaller motors the frame length will be reduced.
For accurate dimensions use proSELECTA II or on request.

③ Dimensions on request
④ The RZR 12-0200 to 0355 can only be supplied as standard basic models.

RZR 13-0400/-1000 RZR 18-0400/-1000

Fan set arrangement with base frame

Dimensions in mm, subject to change.

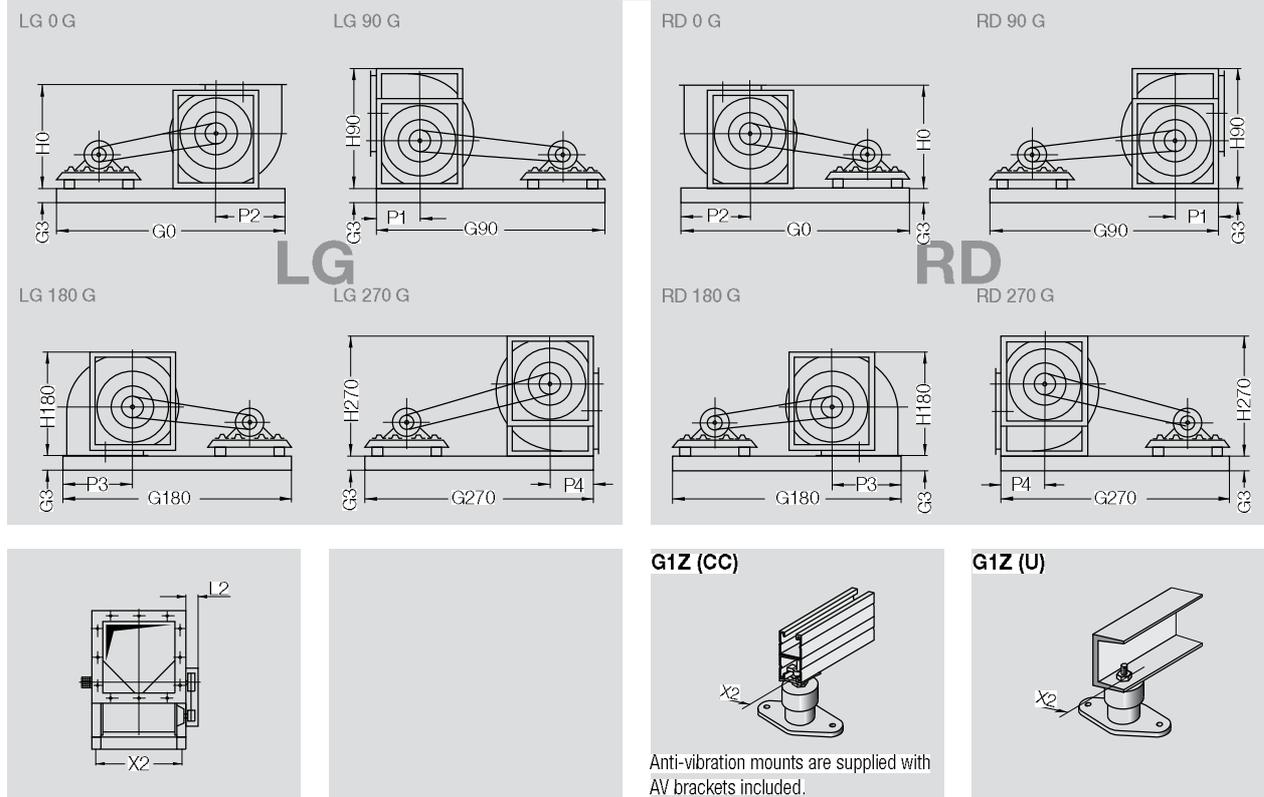

Anti-vibration mounts are supplied with AV brackets included.

RZR	RZR		G0		G90		G180		G270		G3 for motor size					
			CC ^②	U	63-71	80-90	100-132	160-180	200-225	250-280						
13-	18-	0400	1240	-	1300	-	1650	-	1240	-	82-CC	82-CC	82-CC	82-CC	80-U ^③	-
13-	18-	0450	1300	-	1350	-	1740	-	1298	-	82-CC	82-CC	82-CC	82-CC	80-U ^③	-
13-	18-	0500	1411	-	1411	-	1772	-	1411	-	82-CC	82-CC	82-CC	82-CC	80-U ^③	-
13-	18-	0560	1468	-	1468	-	1908	-	1468	-	82-CC	82-CC	82-CC	82-CC	80-U ^③	-
13-	18-	0630	1564	-	1564	-	2006	-	1564	-	82-CC	82-CC	82-CC	82-CC	80-U ^③	-
13-	18-	0710	1660	1700	1660	1700	2145	2115	1660	1700	82-CC	82-CC	82-CC	100-U	120-U ^③	
13-	18-	0800	-	2300	-	2300	-	2885	-	2300	80-U	80-U	80-U	100-U	120-U	
13-	18-	0900	-	2410	-	2410	-	3052	-	2410	80-U	80-U	80-U	100-U	120-U	
13-	18-	1000	-	2505	-	2505	-	3180	-	2505	80-U	80-U	80-U	100-U	120-U	

RZR	RZR		H0	H90	H180	H270	L2	P1	P2	P3	P4	X2	Motor Base frame ~ kg max.				
													CC	80-U	100-U	120-U	
13-	18-	0400	671	775	671	775	170	290	290	669	290	550	225	31	③	③	③
13-	18-	0450	755	868	755	868	170	316	316	718	316	614	225	32	③	③	③
13-	18-	0500	827	957	827	957	170	345	345	766	345	682	225	33	60	-	-
13-	18-	0560	921	1083	921	1083	210	382	382	851	382	759	225	34	63	-	-
13-	18-	0630	1028	1204	1028	1204	210	410	410	915	410	846	225	35	68	-	-
13-	18-	0710	1152	1350	1152	1350	240	464	464	1014	464	943	250	37	94	155	-
13-	18-	0800	1290	1520	1290	1520	250	518	518	1155	518	1048	250	-	67	98	155
13-	18-	0900	1448	1707	1448	1707	260	570	570	1276	570	1179	280	-	72	105	165
13-	18-	1000	1577	1869	1577	1869	260	620	620	1317	620	1316	280	-	77	111	165

② The base frame length has been determined with the always largest admitted motor size. With smaller motors the frame length will be reduced.
For accurate dimensions use proSELECTA II or on request.






③ Dimensions on request

RZR 11-0800/-1000
RZR 15-0400/-1000

RZR 19-0400/-1000

Fan set arrangement with base frame

Dimensions in mm, subject to change.

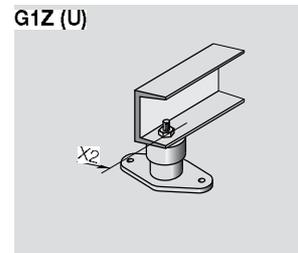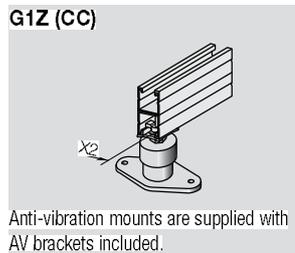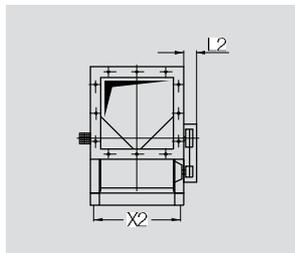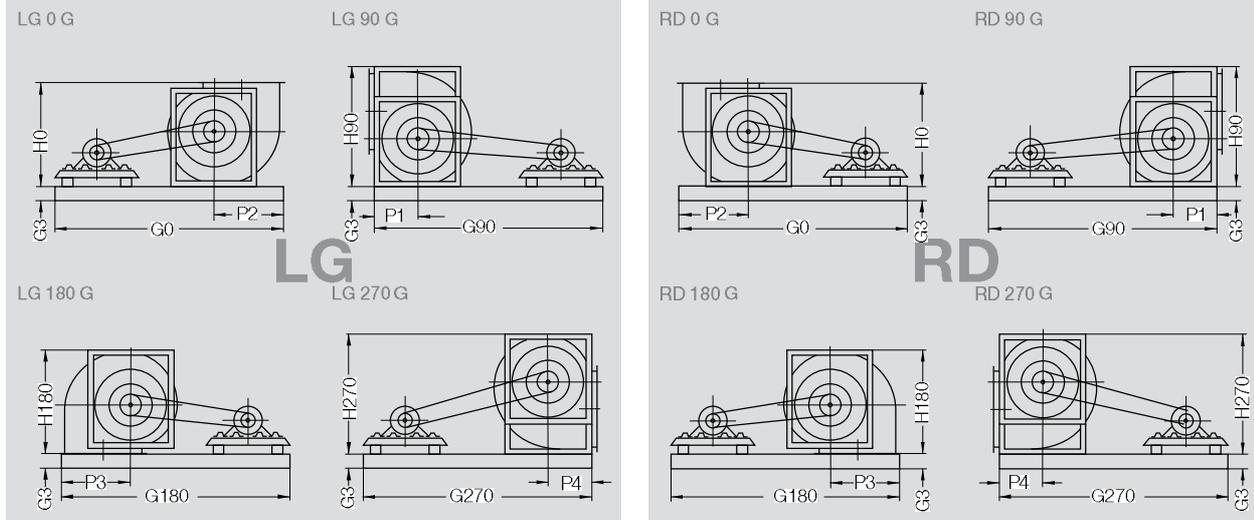

Anti-vibration mounts are supplied with AV brackets included.

RZR	RZR	RZR	G0		G90		G180		G270		G3 for motor size					
			CC(2)	U	CC(2)	U	CC(2)	U	CC(2)	U	63-71	80-90	100-132	160-180	200-225	250-280
15-	19-	0400	1240	-	1300	-	1650	-	1240	-	82-CC	82-CC	82-CC	82-CC	80-U (3)	-
15-	19-	0450	1300	-	1350	-	1740	-	1298	-	82-CC	82-CC	82-CC	82-CC	80-U (3)	-
15-	19-	0500	1411	-	1411	-	1772	-	1411	-	82-CC	82-CC	82-CC	82-CC	80-U (3)	-
15-	19-	0560	1468	-	1468	-	1908	-	1468	-	82-CC	82-CC	82-CC	82-CC	80-U (3)	-
15-	19-	0630	1564	-	1564	-	2006	-	1564	-	82-CC	82-CC	82-CC	82-CC	80-U (3)	-
15-	19-	0710	1660	1700	1660	1700	2145	2115	1660	1700	82-CC	82-CC	82-CC	82-CC	100-U	120-U (3)
11-	15-	19-	0800	-	2300	-	2300	-	2885	-	80-U	80-U	80-U	100-U	100-U	120-U
11-	15-	19-	0900	-	2410	-	2410	-	3052	-	80-U	80-U	80-U	100-U	100-U	120-U
11-	15-	19-	1000	-	2505	-	2505	-	3180	-	80-U	80-U	80-U	100-U	100-U	120-U


RZR	RZR	RZR	H0	H90	H180	H270	L2	P1	P2	P3	P4	X2	Motor Base frame ~ kg					
													max.	CC	80-U	100-U	120-U	
15-	19-	0400	671	775	671	775	170	290	290	669	290	550	225	31	(3)	(3)	(3)	
15-	19-	0450	755	868	755	868	170	316	316	718	316	614	225	32	(3)	(3)	(3)	
15-	19-	0500	827	957	827	957	170	345	345	766	345	682	225	33	60	-	-	
15-	19-	0560	921	1083	921	1083	210	382	382	851	382	759	225	34	63	-	-	
15-	19-	0630	1028	1204	1028	1204	210	410	410	915	410	846	225	35	68	-	-	
15-	19-	0710	1152	1350	1152	1350	240	464	464	1014	464	943	250	37	94	155	-	
11-	15-	19-	0800	1290	1520	1290	1520	250	518	518	1155	518	1048	250	-	67	98	155
11-	15-	19-	0900	1444	1707	1444	1707	260	570	570	1276	570	1179	280	-	72	105	165
11-	15-	19-	1000	1573	1869	1573	1869	260	620	620	1317	620	1316	280	-	77	111	165

(2) The base frame length has been determined with the always largest admitted motor size. With smaller motors the frame length will be reduced.
For accurate dimensions use proSELECTA II or on request.


(3) Dimensions on request

AT 7/7-18/18

Fan set arrangement with Pick-A-Back

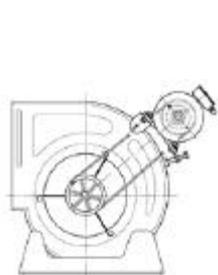


Version 1

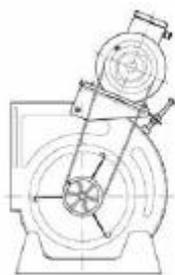

Version 2

Using these specially designed motor brackets, the motor can be fixed, Pick-A-Back, directly on the scroll of the S-version fans.
When the motor must be held on the fan side-frames, the customer will need providing an appropriate slide or bracket, to connect it to the fixing holes on the standard frames.

Motor positions

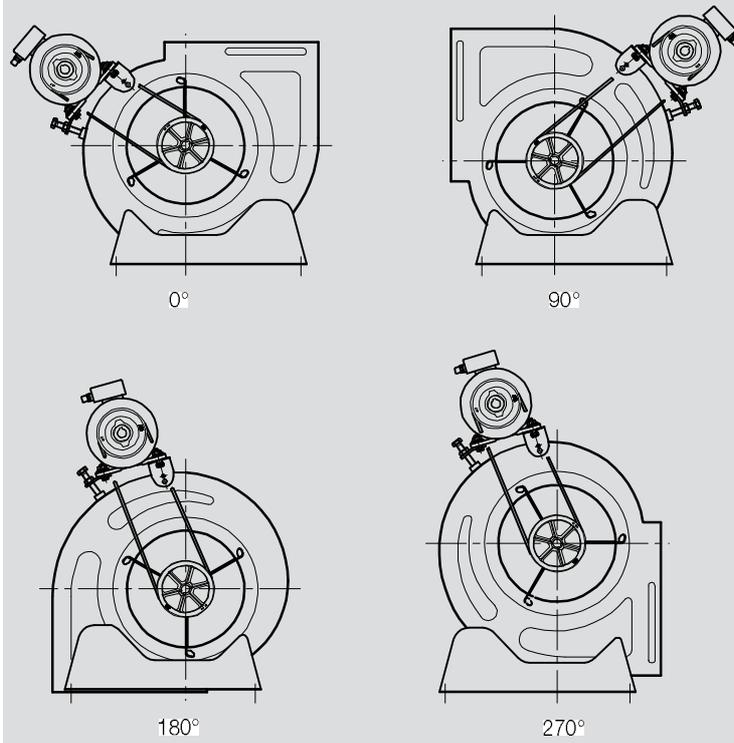

Permissible Motor Power


Size AT	Version 1		Version 2	
	Article-code	Max. permissible motor power kW	Article-code	Max. permissible motor power kW
7/7	687303	0.75	687940	–
9/7	687303	0.75	687940	1.1
9/9	687308	0.75	687941	1.1
10/8	687312	0.75	687942	1.5
10/10	687314	0.75	687943	1.5
12/9	687318	0.75	687944	2.2
12/12	687320	0.75	687945	2.2
15/11	687335	0.75	687546	3.0
15/15	687338	0.75	687947	3.0
18/13	687346	0.75	687948	3.0
18/18	687348	0.75	687949	3.0

RZR 11-0200/-0710

RZR 19-0200/-0355

Fan set arrangement with Pick-A-Back

Dimensions in mm, subject to change.

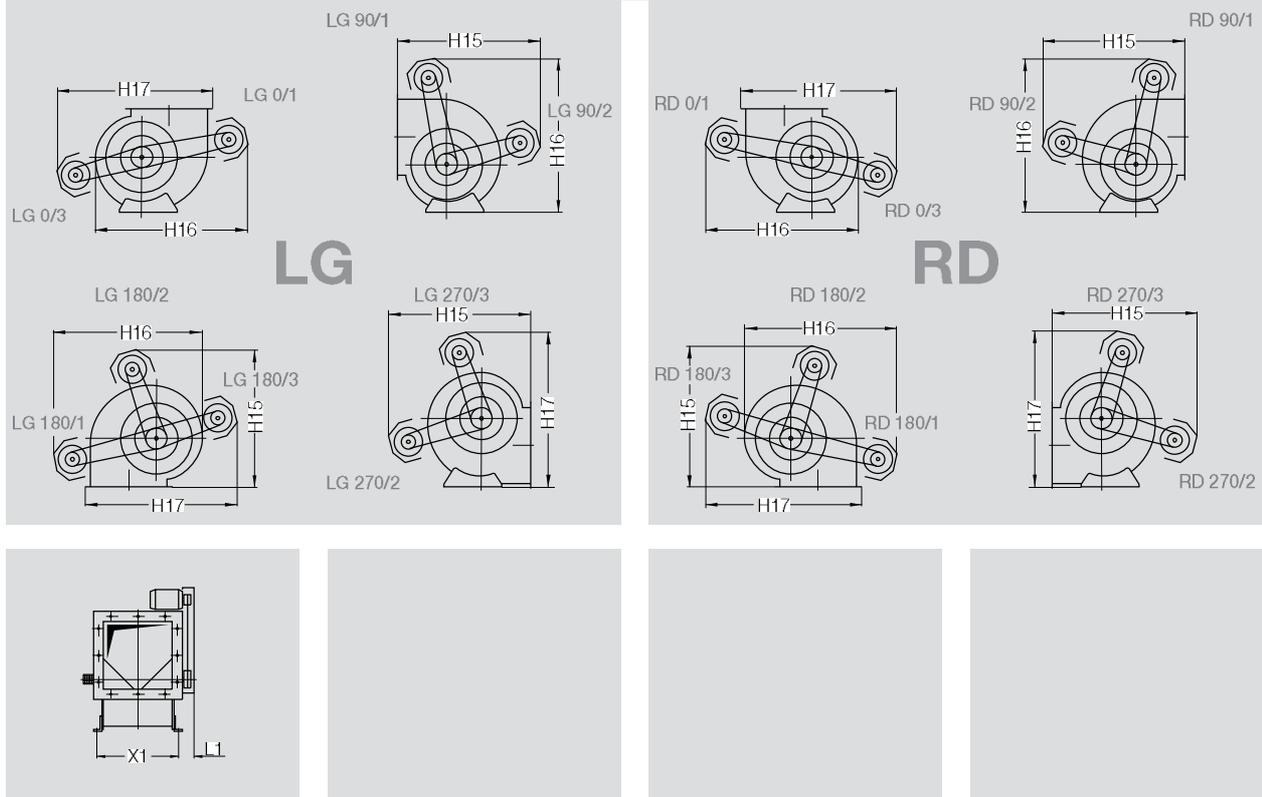


RZR	RZR	① ~ H15	① ~ H16	① ~ H17	L1	X1	Motor max.	Weight ~ kg
11-	19- 0200	650	720	680	100	286	90	1
11-	19- 0225	700	760	720	100	322	100	2
11-	19- 0250	750	850	810	100	356	100	2
11-	19- 0280	860	930	890	100	395	112	3
11-	19- 0315	880	970	960	100	438	112	3
11-	19- 0355	960	1080	1070	100	487	112	3
11-	0400	1280	1290	1280	120	546	132	8
11-	0450	1330	1430	1380	120	612	132	8
11-	0500	1360	1470	1560	120	680	132	8
11-	0560	1510	1630	1740	150	756	132	11
11-	0630	1660	1800	1820	150	843	160	12
11-	0710	1810	1960	2010	180	940	160	17

① This dimensions have been calculated with the largest appropriate applicable motor in mind.

RZR 12-0200/-0710

Fan set arrangement with Pick-A-Back

Dimensions in mm, subject to change.

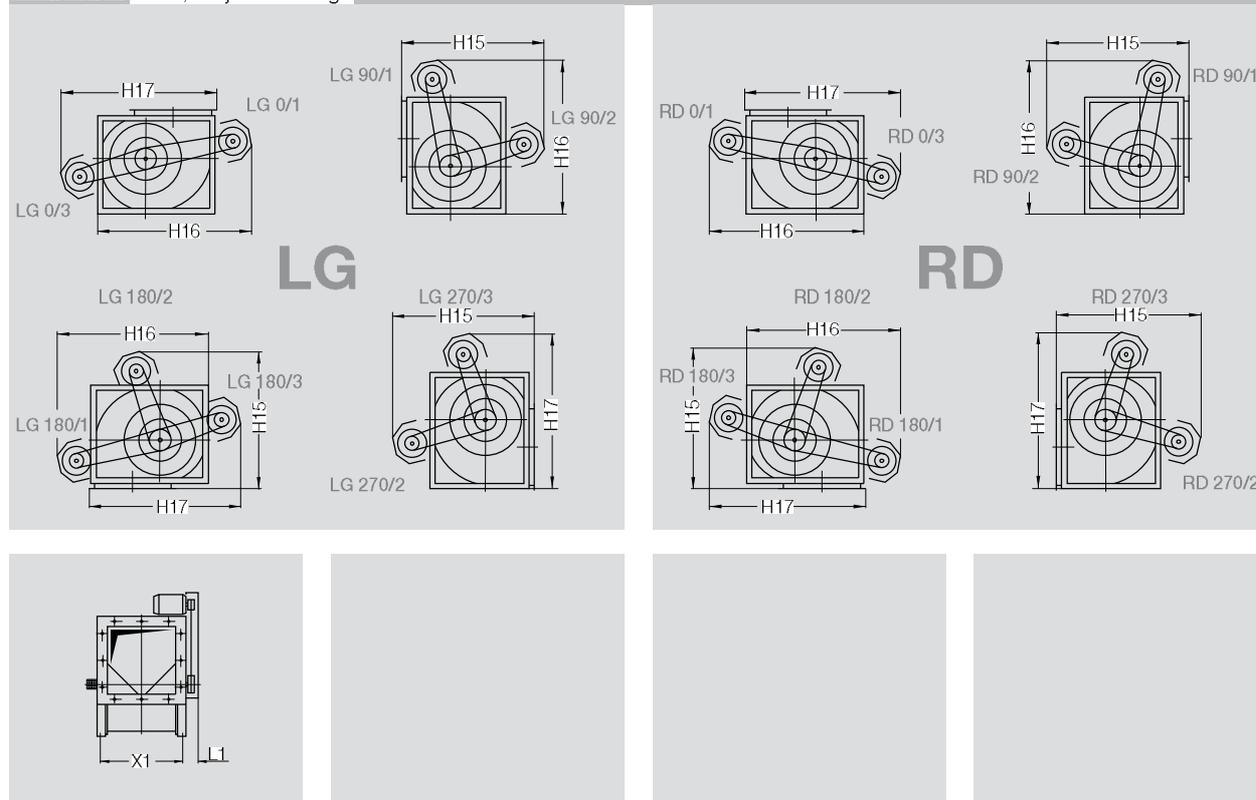

RZR	① ~ H15	① ~ H16	① ~ H17	~ L1	X1	Motor max.	Weight ~ kg
12- 0200	670	670	690	100	286	90	1
12- 0225	710	730	780	100	322	100	1
12- 0250	850	840	860	100	356	100	2
12- 0280	880	920	930	100	395	112	2
12- 0315	950	950	1030	100	438	112	3
12- 0355	1080	1090	1130	100	487	112	3
12- 0400	1190	1290	1280	120	546	132	7
12- 0450	1330	1430	1390	120	612	132	7
12- 0500	1360	1470	1560	120	680	132	8
12- 0560	1500	1620	1630	150	756	132	11
12- 0630	1650	1790	1810	150	843	160	12
12- 0710	1800	1950	2000	180	940	160	17


① This dimensions have been calculated with the largest appropriate applicable motor in mind.

RZR 13-0400/-1000

RZR 18-0400/-1000

Fan set arrangement with Pick-A-Back

Dimensions in mm, subject to change.

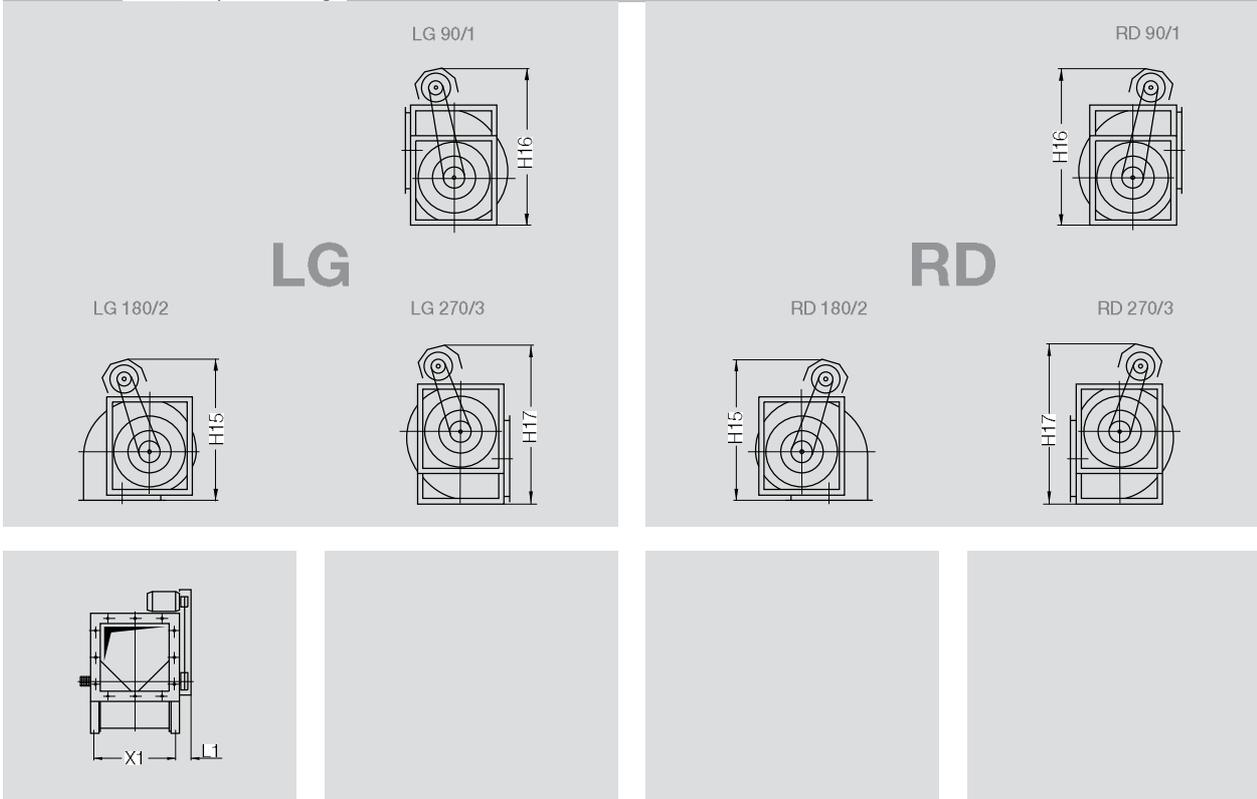

RZR	RZR	① ~ H15	① ~ H16	① ~ H17	~ L1	X1	Motor max.	Weight ~ kg
13-	18- 0400	1280	1300	1300	170	548	132	10
13-	18- 0450	1320	1430	1380	170	612	132	11
13-	18- 0500	1350	1560	1550	170	683	132	12
13-	18- 0560	1530	1700	1730	210	759	160	15
13-	18- 0630	1640	1870	1820	210	845	160	16
13-	18- 0710	1800	1970	2010	240	942	160	23
13-	18- 0800	1970	2150	2150	250	1053	160	30
13-	18- 0900	2150	2400	2350	260	1179	160	33
13-	18- 1000	2230	2630	2550	260	1317	160	36


① This dimensions have been calculated with the largest appropriate applicable motor in mind.

RZR 11-0800/-1000
RZR 15-0400/-1000

RZR 19-0400/-1000

Fan set arrangement with Pick-A-Back

Dimensions in mm, subject to change.

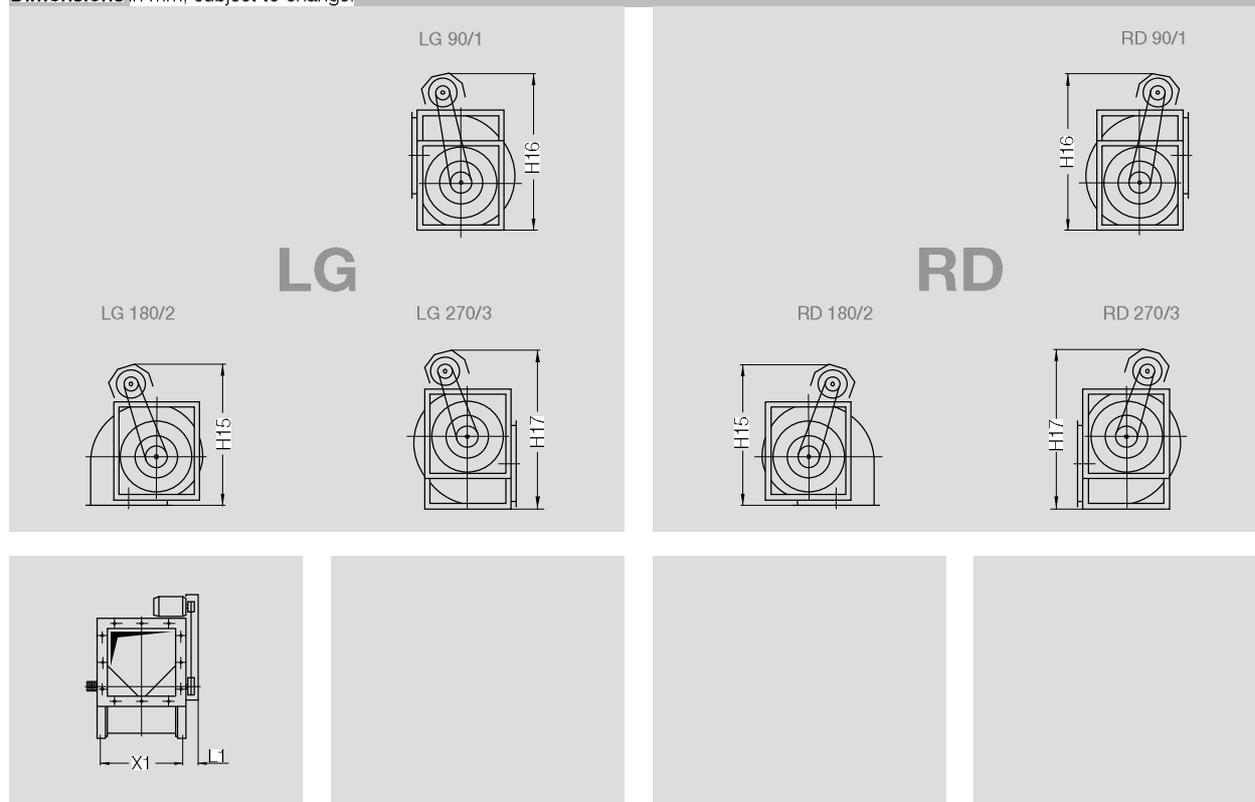

RZR	RZR	RZR	① ~ H15	① ~ H16	① ~ H17	~ L1	X1	Motor max.	Weight ~ kg
15-	19-	0400	1280	1300	1300	170	548	132	10
15-	19-	0450	1320	1430	1380	170	612	132	11
15-	19-	0500	1350	1560	1550	170	683	132	12
15-	19-	0560	1530	1700	1730	210	759	160	15
15-	19-	0630	1640	1870	1820	210	845	160	16
15-	19-	0710	1800	1970	2010	240	942	160	23
11-	15-	0800	1970	2150	2150	250	1053	160	30
11-	15-	0900	2150	2400	2350	260	1179	160	33
11-	15-	1000	2230	2630	2550	260	1317	160	36

① This dimensions have been calculated with the largest appropriate applicable motor in mind.

Fan Sets

Min. Pulley-Diameter, Bearings Life Expectency

As a principle, the fans are only equipped with noise tested precision bearings designed for a nominal bearing life time (L10h acc. to DIN ISO 281-1) of 40,000 operating hours.

In order to not exceed the admitted bearing loads there are minimum pulley diameters defined to be respected when sizing the belt drive.


The minimum pulley diameters indicated are to be applied for belt drives selected according to the state of the art and tensioned according to the prescriptions.

For flat belt drives the minimum pulley diameters are to be increased of 40 % to the indicated figure!

A correct design of a belt drive may be achieved with our selection software where all relevant parameters will be kept automatically.

For correct design of a belt drive made by external means, dimensioning and the application of the tensioning forces have to be made in full respect of all specification data indicated.

Wedge Belts

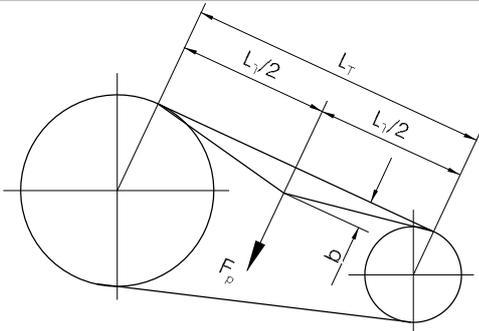

L_T = Shaft Centres


b = Deflection of belt in mm under test force F_D

F_p = Test force N as prescribed by Nicotra Gebhardt-Documnt

Belt Tensioning

The correct tension is achieved when the test force F_p results in a deflection of 16 mm / metre of span.

Flat Belts

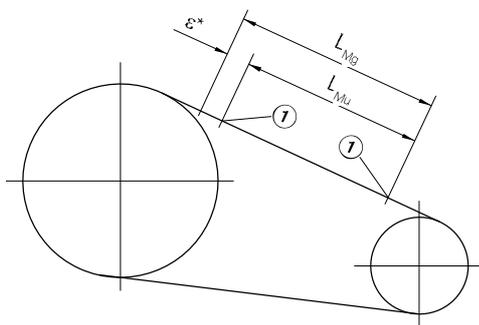

L_{Mu} = Measuring Marks ① before Tensioning


L_{Mg} = Measuring Marks ① After Tensioning

ϵ^* = Stretching Values as specified by Nicotra Gebhardt-Documnt

Belt Tensioning

The correct belt tension is achieved when the measuring marks L_{Mu} have increased by the stretching value ϵ^* . This should be carried out in two stages to prevent over-stressing of the bearing.

Wedge- and Flat Belts

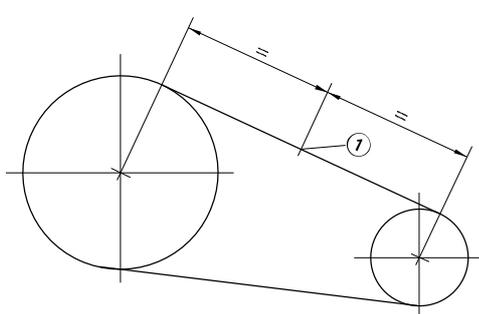

A further simple method for setting or checking the correct belt tension is via the static frequency of the drive belt.

Here the flat or V-belt is set to oscillate freely through striking it whilst stationary.

These vibrations are measured using an electronic measuring unit (e.g. a belt tension gauge). The vibration frequency in Hz must then be set to the specified value (documentation / nameplate).

① = Measuring point

Detailed instruction on tensioning are included within the operating and maintenance manuals.

Fan Sets

Min. recommended Pulley Diameter for ADH																
Fan size	Fan model	Nominal motor power in kW														
		2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55	75	
160	E0 / E2	63	71													
	G2E0 / E2	63	71													
180	E0 / E2	63	80													
	G2E0 / E2	63	80													
200	E0 / E2 / E4	71	95	125												
	G2E0 / E2	71	95	140												
225	E0 / E2 / E4	80	112	140												
	G2E0 / E2	80	100	160												
250	E0 / E2	80	112	150												
	E4		90	112	140	180										
	G2E0 / E2	80	100	132												
	G2E4		95	125	160	224										
	G2E7					100	118	160								
280	E0 / E2		100	140	180											
	E4			90	112	140	212									
	G2E0 / E2			112	140	180										
	G2E4					100	118	150	224							
	G2E7							112	112	140	180	224				
315	E0 / E2		100	125	180											
	E4			90	125	160	250									
	E6						160	224	250							
	G2E0 / E2			112	140	200										
	G2E4					112	140	180	250							
355	G2E7							160	190	212	300					
	E0 / E2			100	132	180										
	E4				112	150	224	280								
	E6						125	180	224	236						
	G2E0 / E2			112	140	200										
400	G2E4							280								
	G2E7							160	180	212	300					
	E0 / E2			100	132	180										
	E4				112	150	224	280								
	E6						140	180	212	250						
450	G2E0 / E2			100	132	180										
	G2E4							200								
	G2E7							100	140	200						
	E0 / E2				112	132	212									
	E4					118	140	200								
500	E6							160	224							
	E7							150	190	224	315					
	G2E0 / E2				112	132	200									
	G2E4					112	180	224								
	G2E7							150	190	224	315					
560	E0 / E2															
	E4							180	224							
	E6							150	200	236						
	E7								160	190	250					
	G2E2									160	180	212	236			
630	G2E4															
	G2E7															
	L / R							132	160	215						
	K								132	200	224					
	K1										160	180	200	224		
710	K2															
	G2R															
	G2K															
	G2K2															
	L / R															
800	K															
	K1															
	K2															
	G2K															
	G2K2															
900	L / R															
	K															
	K1															
	K2															
	G2K															
1000	G2K2															
	L / R															
	K															
	K2															
	G2K															